

COUPLER

90° HYBRID 120 WATT

HybriX®



DATA SHEET

PART SERIES: HMJ2F

SHEET 1 OF 3
Dwg HMJ2F

EN 13-3117
Revision -

FEATURES


- Low Profile Surface Mount Package
- High Power
- Low Insertion Loss
- High Isolation
- High Reliability

APPLICATIONS

- Power Amplifiers
- Modulator
- Demodulator
- Signal Distribution Network
- Antenna Feeds
- Switch Networks

GENERAL DESCRIPTION

EMC Technology offers high performance hybrid couplers in a low profile, surface mount package. These couplers are designed for demanding applications where high power, low loss and excellent isolation are required.

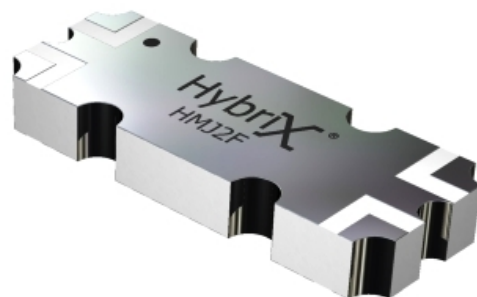

ORDERING INFORMATION

Part Identifier: **HMJ2F**

SPECIFICATIONS

1.0 ELECTRICAL

Frequency	Isolation	Insertion Loss	VSWR	Amplitude Balance	Phase Balance	Power Handling
1700 to 2000 MHz	25 dB Min	0.12 dB Max	1.14 Max	±0.2dB Max	90° ± 2	120 Watts CW

2.0 ENVIRONMENTAL

Operating Temperature: -55°C to +95°C

3.0 MARKING

HybriX, Part Number and Pin 1 Indicator

4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL.

Visual and Mechanical Examination for Conformance To Outline Drawing Requirements.
Measure Amplitude Balance and VSWR

Test Data Requirements

No Test Data Required
Data Retention – 12 months

5.0 PACKAGING

Standard: Tape And Reel

Note: Specifications are subject to change.

COUPLER

90° HYBRID 120 WATT

HybriX®



DATA SHEET

PART SERIES: HMJ2F

SHEET 2 OF 3
Dwg HMJ2F


EN 13-3117
Revision -

6.0 MECHANICAL

Substrate:	PTFE
Conductor:	Copper
Plating:	Immersion Tin
Application Note:	AN0030 (General Hybrid and Directional Coupler)

PIN CONFIGURATION

Port	J1	J2	J3	J4
J1	-	Iso	-90°	0°
J2	Iso	-	0°	-90°
J3	-90°	0°	-	Iso
J4	0°	-90°	Iso	-

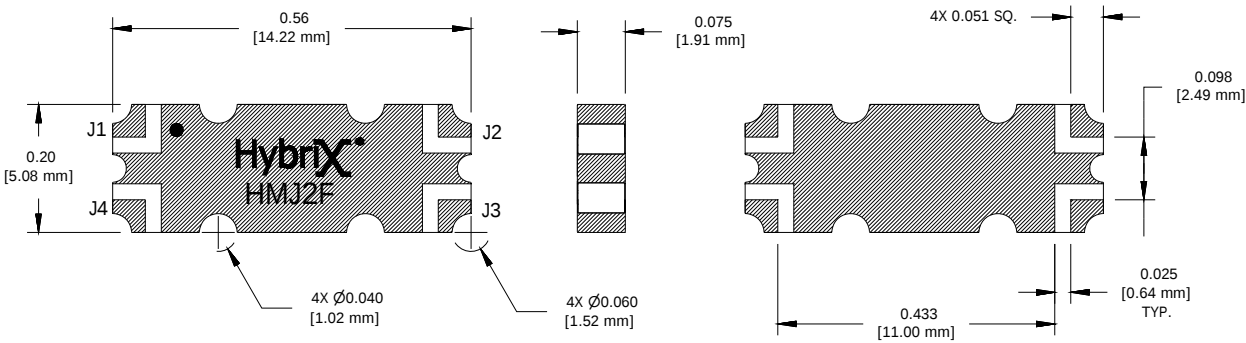

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.01 X.XXX = ± 0.005

Note: Specifications are subject to change.

COUPLER

90° HYBRID 120 WATT

HybriX®









DATA SHEET

PART SERIES: HMJ2F

SHEET 3 OF 3
Dwg HMJ2F

EN 13-3117
Revision -

7.0 TYPICAL PERFORMANCE AT 25°C

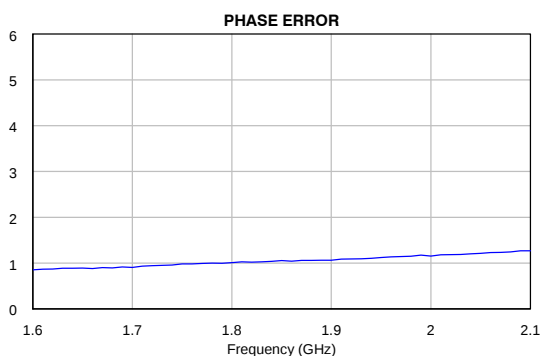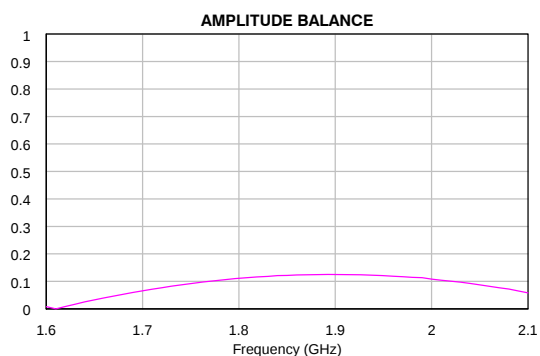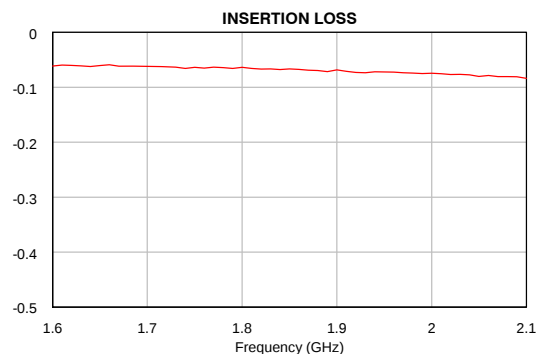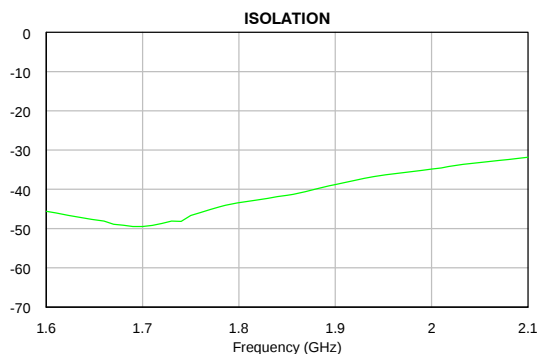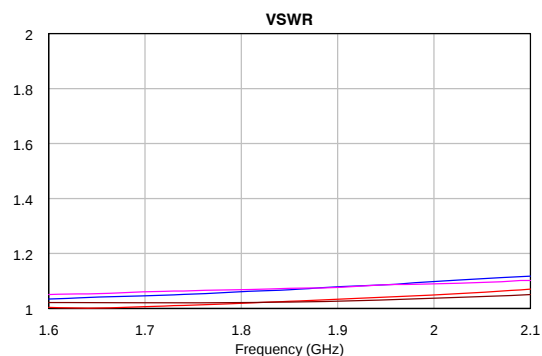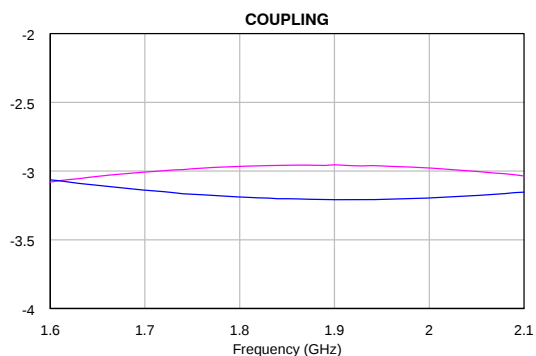

Note: Specifications are subject to change.