


Features

- Wideband PLL
- 3 wire serial integer PLL
- 1.0"x1.25"x0.2"
- Low phase noise
- Programming : ADF4113(ADI)

Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

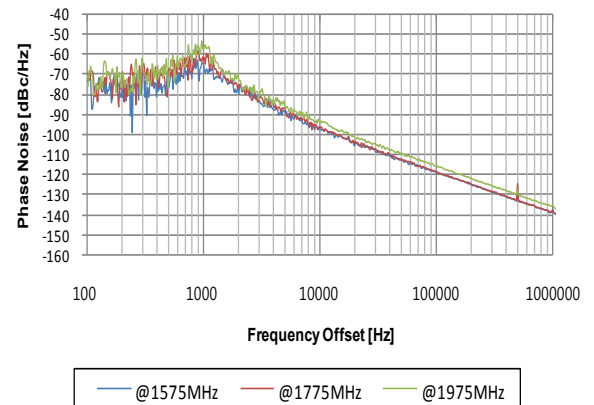


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1575		1975
Step Size	kHz		500	
Settling Time	msec		10	30
Output Power	dBm	0.0	+3.0	+6.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-63	-58
	@10kHz offset	dBc/Hz	-97	-92
	@100kHz offset	dBc/Hz	-117	-112
	@1MHz offset	dBc/Hz	-136	-131
2nd Harmonic Suppression	dBc		-30	-20
Sideband Spurious Suppression	dBc			-80
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	12	
	Current	mA	30	40
PLL Power Supply (Vcp)	Voltage	Vdc	12	
	Current	mA	5	10
Operating Temp. Range	°C	-40		+85


Dimensions

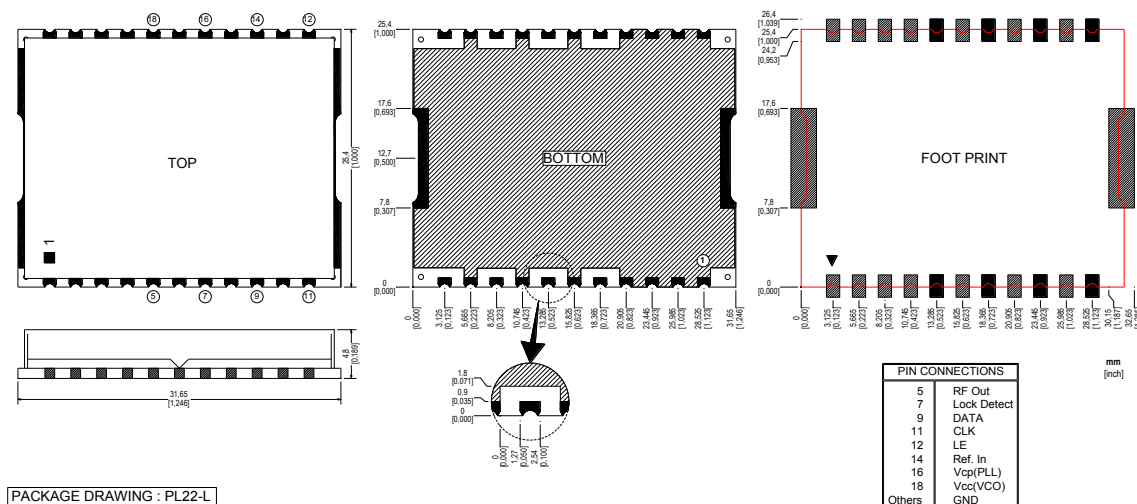


Harmonic Suppression - @1575MHz

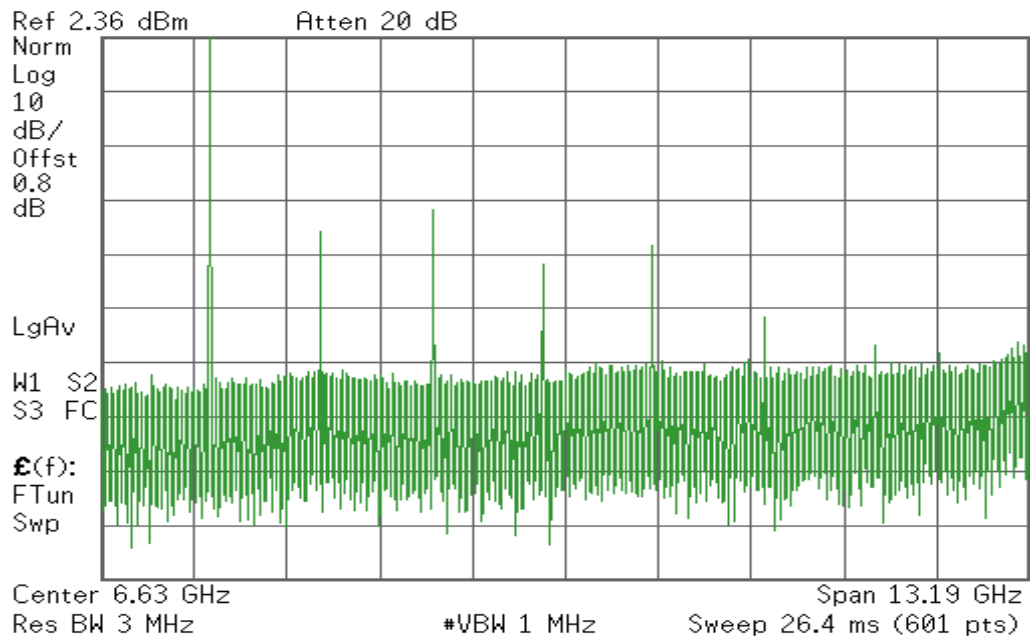


Sideband Spurious Suppression - @1575MHz

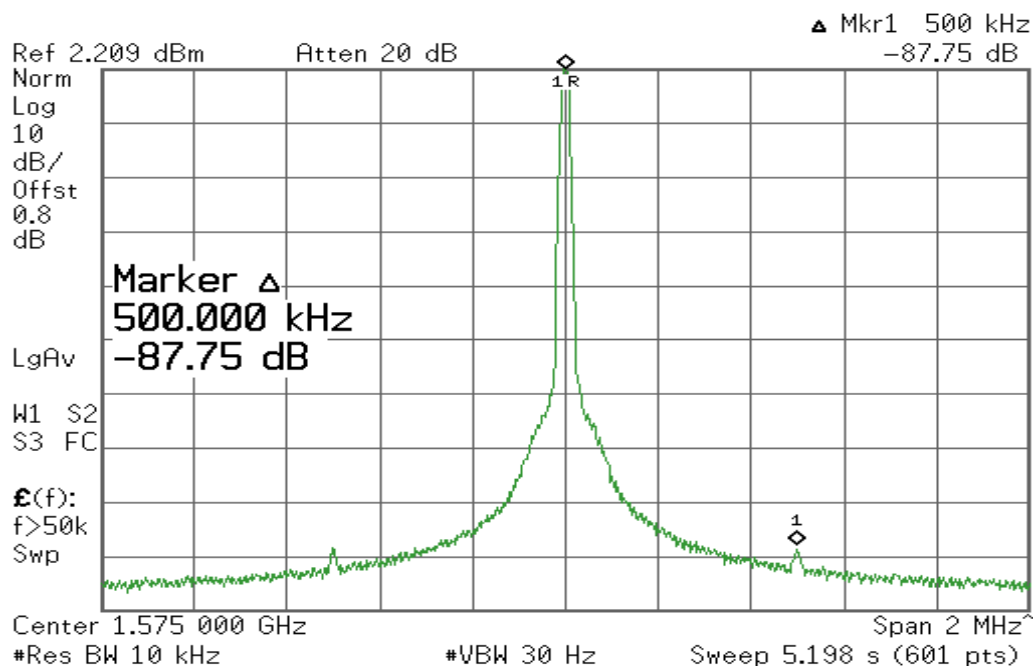


■ Harmonic Suppression - @1775MHz

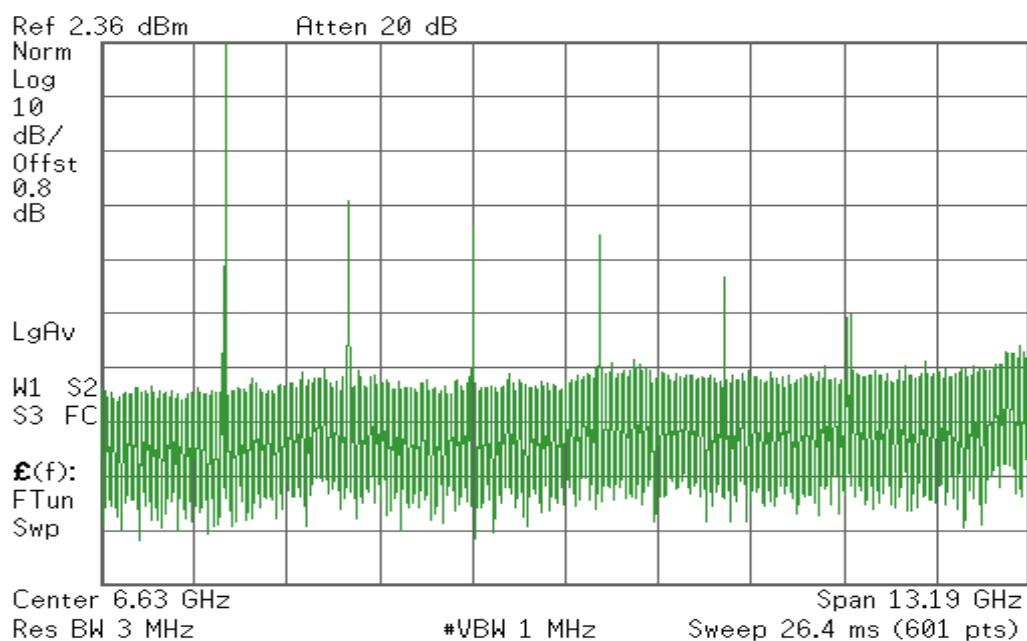

■ Sideband Spurious Suppression - @1775MHz

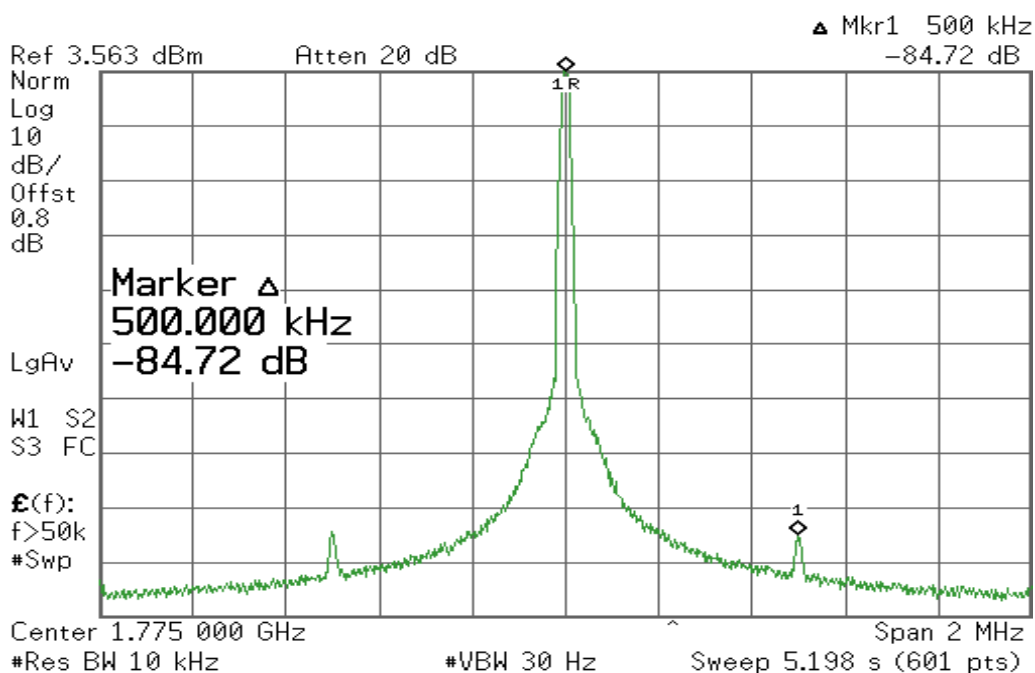

Harmonic Suppression - @1975MHz

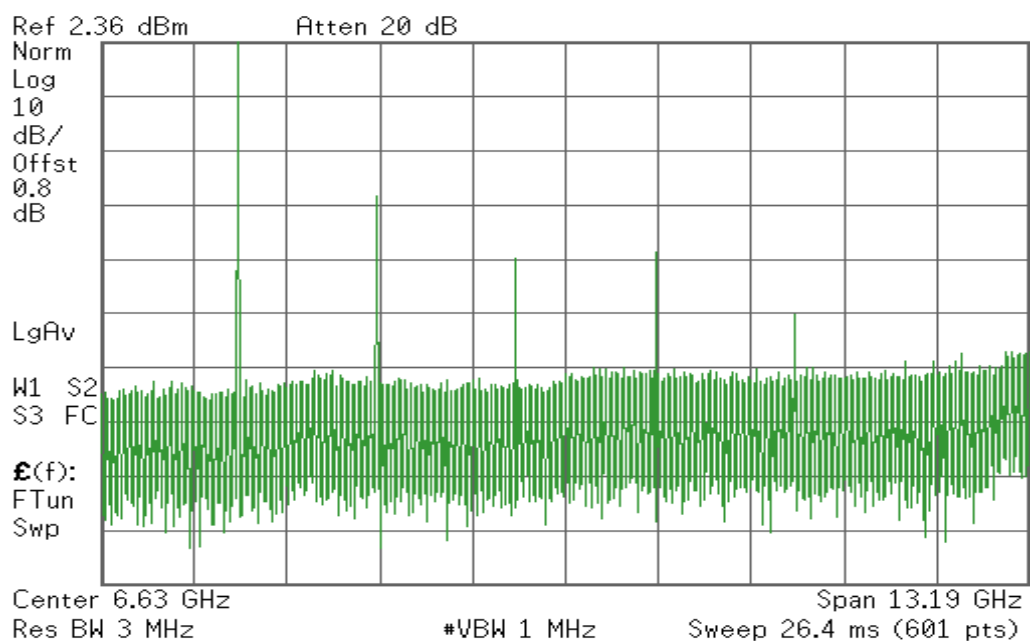

Sideband Spurious Suppression - @1975MHz

