


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

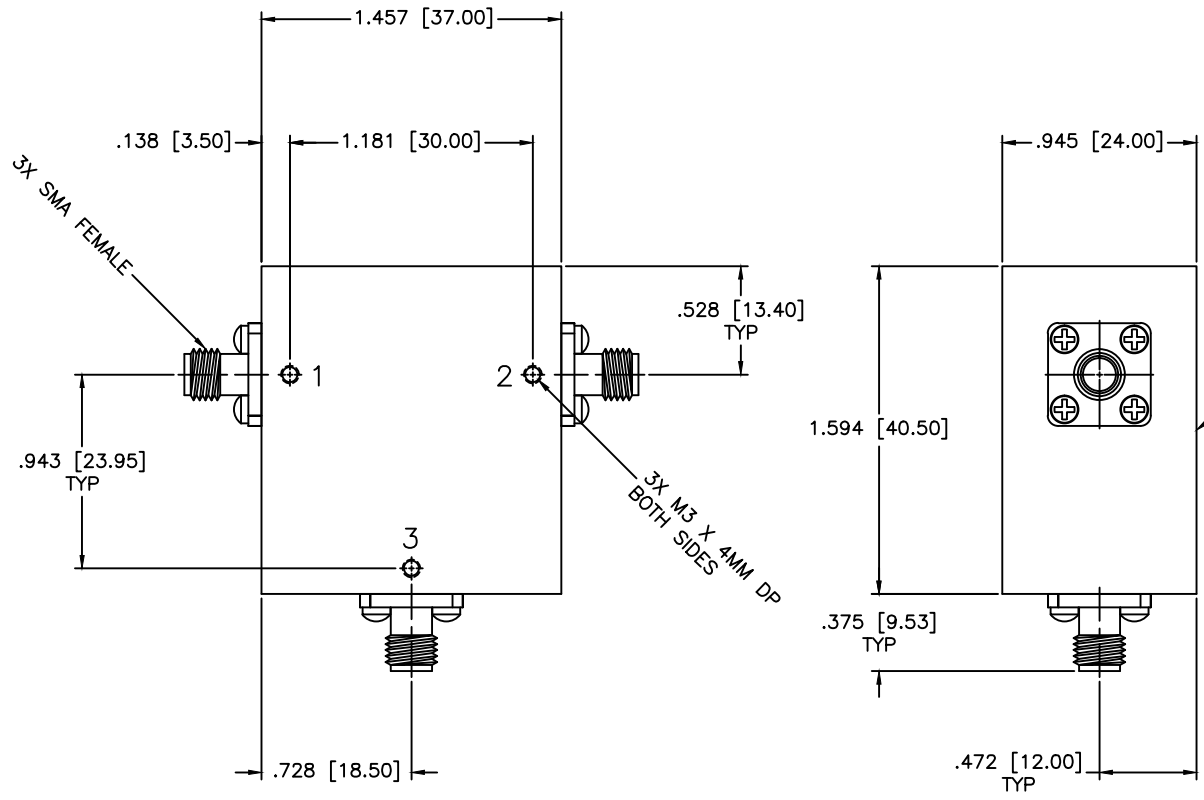

SPECIFICATIONS

Frequency Range: 2.9–3.5 GHz
 Power: 100W Avg, 500W Peak
 Operating Temperature: +10°C to +40°C
 Isolation: 20dB Min.
 Insertion loss: 0.60dB Max.
 VSWR: 1.25:1 Max.

MATERIAL:		MCLI		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A			
						SHEET:		N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR		PART NO. CS-60					
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE:		REV:		DWG. NO.	
		THIRD ANGLE PROJECTION 		OD2L5		N/A		N/A		82891	
APPROVED: T. Nguyen		DATE: 08-10-2007		DO NOT SCALE THE DRAWING							