


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

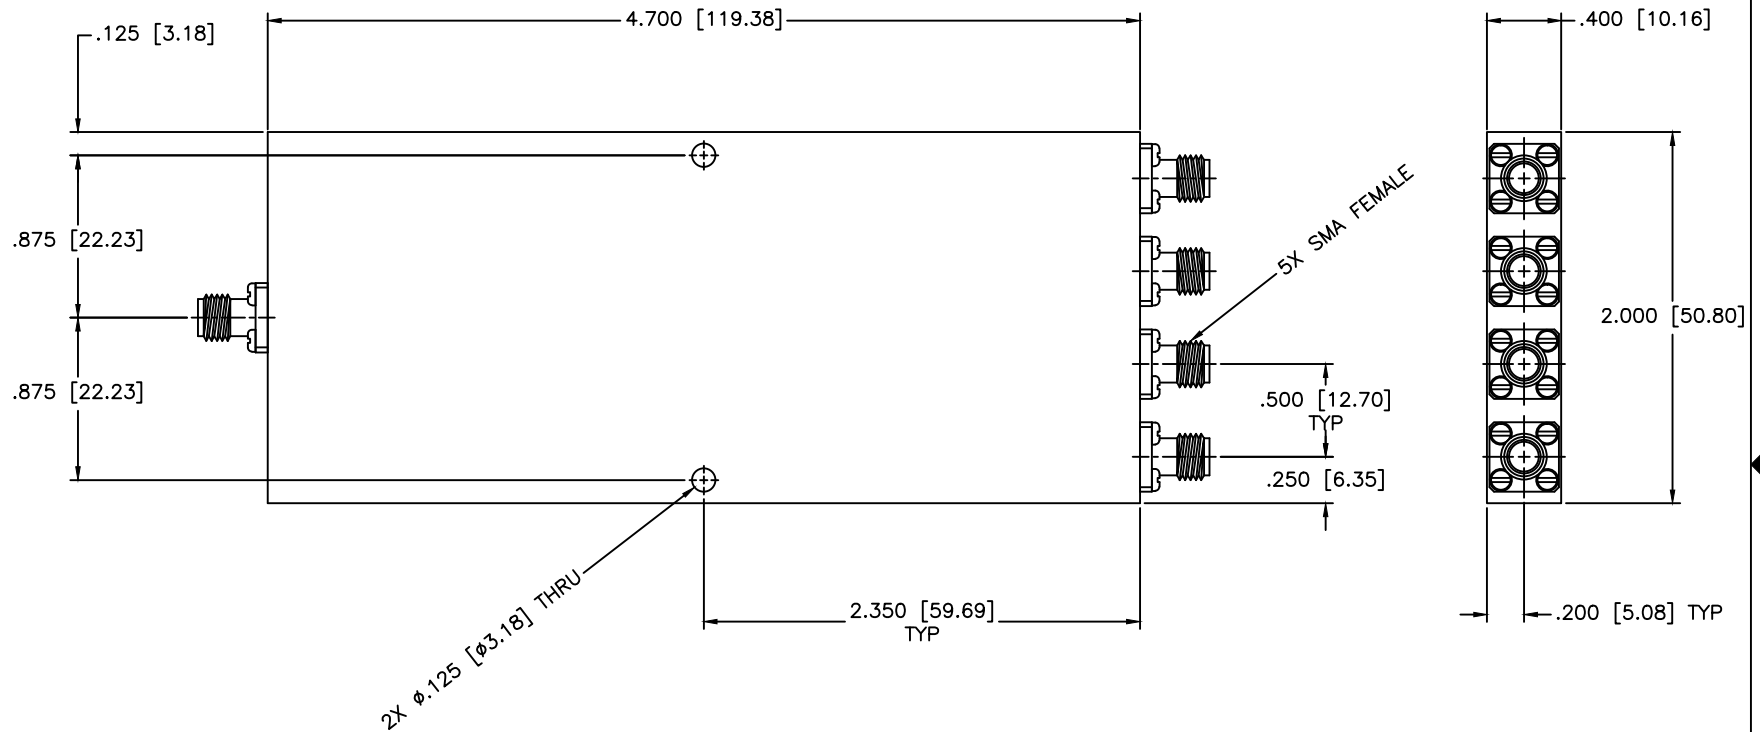

SPECIFICATIONS

Frequency Range: 2–18 GHz
 Insertion Loss: 2.3dB Max.
 Isolation: 18dB Min.
 VSWR Input/Output: 1.50:1/1.40:1 Max.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: 0.8dB Max.
 Power: 20W (Load vswr@1.2)

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 06-29-1999		DRAWING TITLE: 4-WAY POWER DIVIDER		
		PART NO. PS4-11		
APPROVED: T. Nguyen DATE: 06-29-1999		CAGE CODE: OD2L5		SIZE: A REV: N/A DO NOT SCALE THE DRAWING
		DWG NO. 81136		