

MINIATURE PRECISION OCXO MV197

Features:

- Package height from 16 mm, down to 10 mm
- High stability vs. temperature: up to $\pm 5 \times 10^{-10}$
- Long term stability up to $\pm 2 \times 10^{-8}$ /year
- Low phase noise option
- Fast warm-up time up to 1 min
- Available as RoHS
- Frequency range: 8.192 – 20.0 MHz

Power supply	Output	Package type	
12V	SIN	36x27x16 mm	B16
5V	HCMOS	36x27x12.7 mm	B12.7
		36x27x10 mm	B10

ORDERING GUIDE: MV197– C 3 F – 12V – SIN – B12.7 – LN – 10.0 MHz

Availability of certain stability vs. operating temperature range (for 10 MHz)		Standard frequencies						
		$\pm 5 \times 10^{-9}$	$\pm 3 \times 10^{-9}$	$\pm 2 \times 10^{-9}$	$\pm 1 \times 10^{-9}$	$\pm 7.5 \times 10^{-10}$	$\pm 5 \times 10^{-10}$	$\pm 3 \times 10^{-10}$
A	0...+55 °C	A	A	A	A	A	A	A
B	-10...+60 °C	A	A	A	A	A	A	C
C	-20...+70 °C	A	A	A	A	A*	A*	N/A
D	-40...+70 °C	A	A	A	A	A*	A*	N/A
EX	-40...+85 °C	A	A	A	A	A*	C	N/A

* - "C" for B10 package.


A – available, NA – not available, C – consult factory

For other temperature ranges see designation at the end of Data Sheet.

Availability of certain aging values for certain frequencies		Standard frequencies				
		10.0 MHz	12.8 MHz	13.0 MHz	16.384 MHz	20.0 MHz
H	$\pm 2 \times 10^{-7}$ /year	A	A	A	A	A
G	$\pm 1 \times 10^{-7}$ /year	A	A	A	A	C
F	$\pm 5 \times 10^{-8}$ /year	A	A	A	C	NA
E	$\pm 3 \times 10^{-8}$ /year	A	C	C	NA	NA
D*	$\pm 2 \times 10^{-8}$ /year	A	C	C	NA	NA

* - only for B16 package

Package drawings:

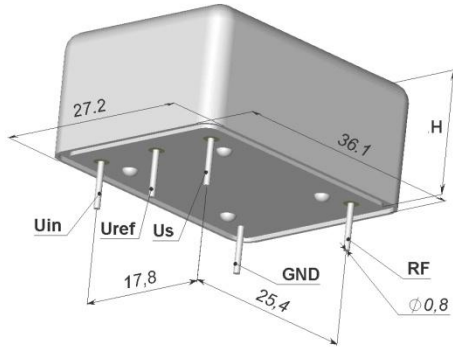

For "H" definition please see package type

Phase noise, dBc/Hz, for 10MHz	-	LN	ULNF	ULN	ULN1 Preliminary
		For 12V, SIN			
1 Hz	<-95	<-100	<-100	<-103	<-105
10 Hz	<-125	<-130	<-130	<-133	<-135
100 Hz	<-145	<-153	<-155	<-155	<-155
1000 Hz	<-150	<-158	<-160	<-160	<-160
10000 Hz	<-155	<-160	<-165	<-161	<-161

Short term stability (Allan deviation) per 1 sec, for 10 MHz	$< 5 \times 10^{-12}$
Optional*	$< 2 \times 10^{-12}$
Frequency stability vs. load changes ($\pm 5\%$)	$< \pm 5 \times 10^{-10}$
Optional*	$< \pm 2 \times 10^{-10}$
Frequency stability vs. power supply changes ($\pm 5\%$)	$< \pm 5 \times 10^{-10}$
Optional*	$< \pm 2 \times 10^{-10}$
Warm-up time within accuracy of $< \pm 2 \times 10^{-8}$ @ 25°C	<3 min
Optional*, within accuracy of $< \pm 1 \times 10^{-7}$ @ 25°C	<1 min

Vibrations:	
Frequency range	10-200 Hz
Acceleration	5 g
Shock:	
Acceleration	75 g
Duration	3±1 ms
Humidity @ 25 °C	98%
Storage temperature range	-55...+85 °C

* Available on request

Additional notes:

- Start-up time < 100 mSec – optional.
- Please consult factory for daily aging values. Normally typical correspondence of daily to aging per year is as following:
 $\pm 1 \times 10^{-7}$ /year – $\pm 1 \times 10^{-9}$ /day; $\pm 5 \times 10^{-8}$ /year – $\pm 5 \times 10^{-10}$ /day; $\pm 3 \times 10^{-8}$ /year – $\pm 3 \times 10^{-10}$ /day
- Please mention RoHS requirement (if any) while requesting for quote or while placing PO.
- For non standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85



MORION, Inc.



13a, KIMa Ave., St.Petersburg, 199155, RUSSIA. <http://www.morion.com.ru>
 Tel:+7-812-350-9243; 332-5032. Fax:+7-812-350-7290. e-mail: sale@morion.com.ru