


FREQUENCY RANGE (GHz)	25°C			-40°C TO +85°C			POWER RATING	
	ISOLATION (dB Min.)	INSERTION LOSS (dB Max.)	V.S.W.R. (Max.)	ISOLATION (dB Min.)	INSERTION LOSS (dB Max.)	V.S.W.R. (Max.)	FWD. POWER (W)	REV. POWER (W)
15 - 18	21	0.55	1.20	20	0.60	1.25	5	1

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

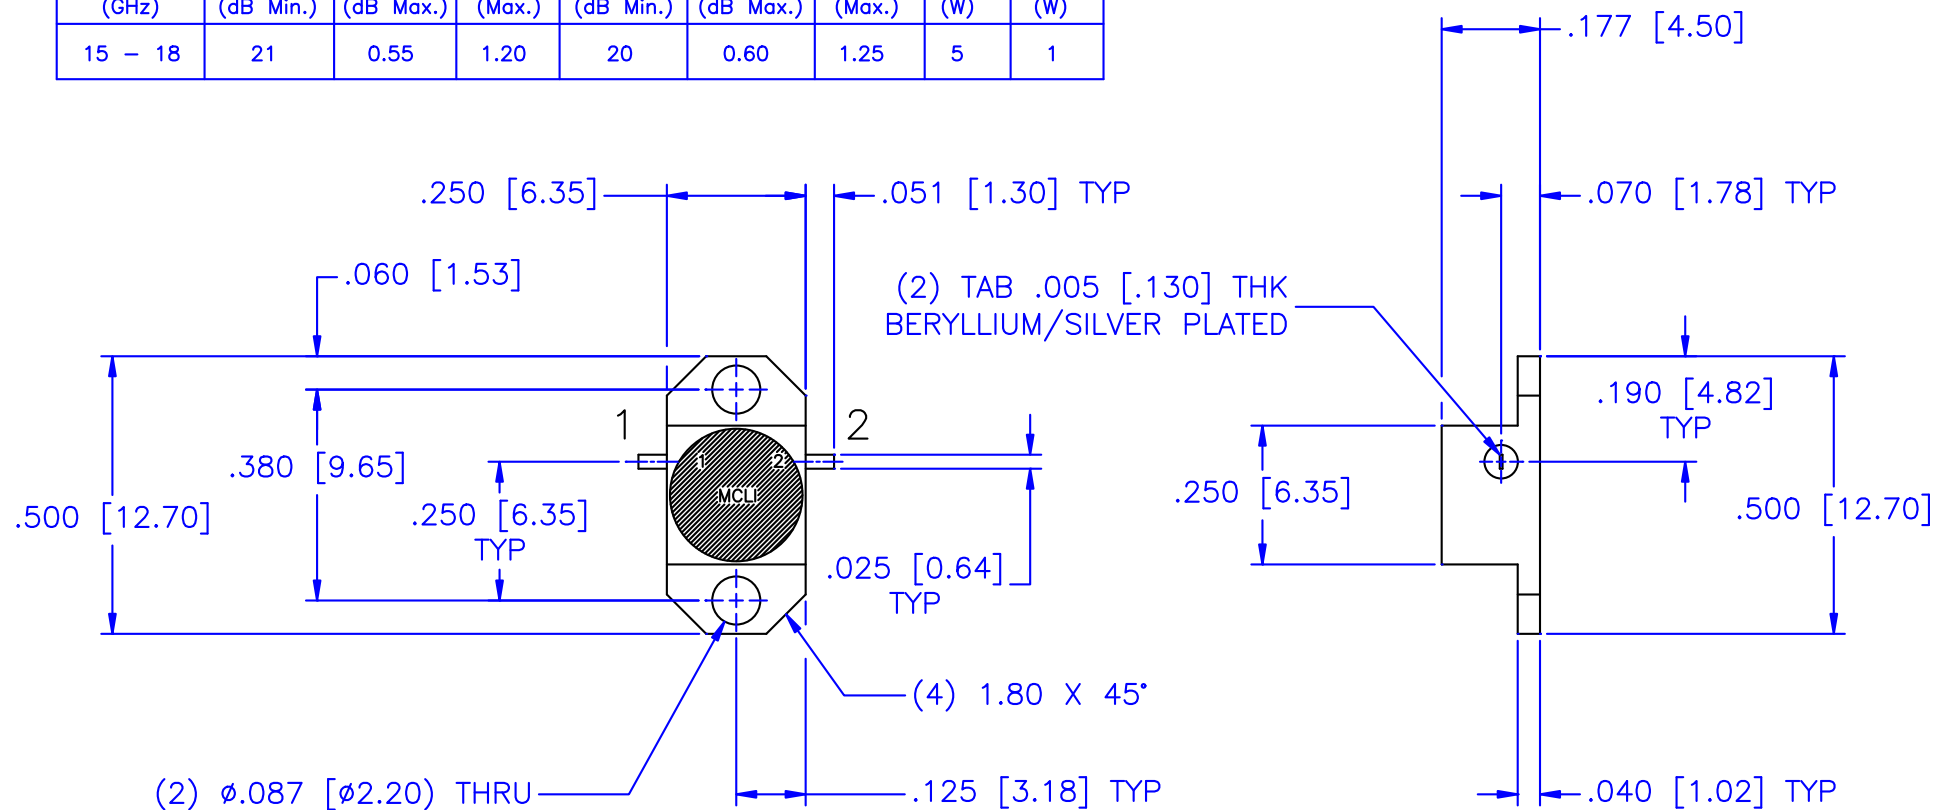

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DROP-IN FLANGE MOUNT ISOLATOR			
		PART NO. DIFM-15			
DRAWN: Paiboon Luekhamhan	DATE: 02-16-2011	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION	CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A
APPROVED: T. Nguyen	DATE: 02-16-2011		DO NOT SCALE THE DRAWING		DWG NO. 83965