




3 way Reactive Power Divider

RD-7027-200-03N

Specifications:

Frequency Range:	700-2700 MHz
Insertion Loss:	5.4 dB Max
VSWR:	1.25:1 Max
PIM:	-140 dBc Min @ 2 x 43 dBm
Power:	200 Watts
Impedance:	50 Ohms
Connectors:	N female
Operating Temp. Range:	-35°C to +60°C
Relative Humidity:	5% - 95%

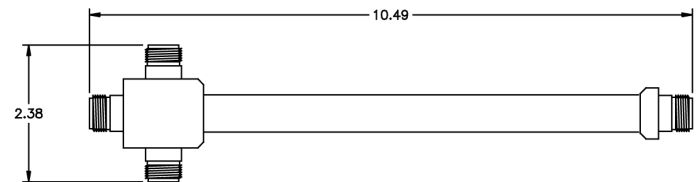

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com