



RF-LAMBDA

The power beyond expectations

RFDU2G2GD

HIGH POWER CAVITY DUPLEXER

CH1:2200-2300MHz
CH2:2360-2395MHz

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85°C
- Operational Temperature: -25~+65 °C
- Operating Humidity: 0~90% relative

Electrical Specification

Frequency Range:

CH1:2200-2300MHz
CH2:2360-2395MHz

Insertion Loss:

CH1: 0.75dB max
CH2: 0.75dB max
0.5dB maximum

Pass band Ripple:

Power Handle:


50W

Isolation between port:

80dB

VSWR :

1.3

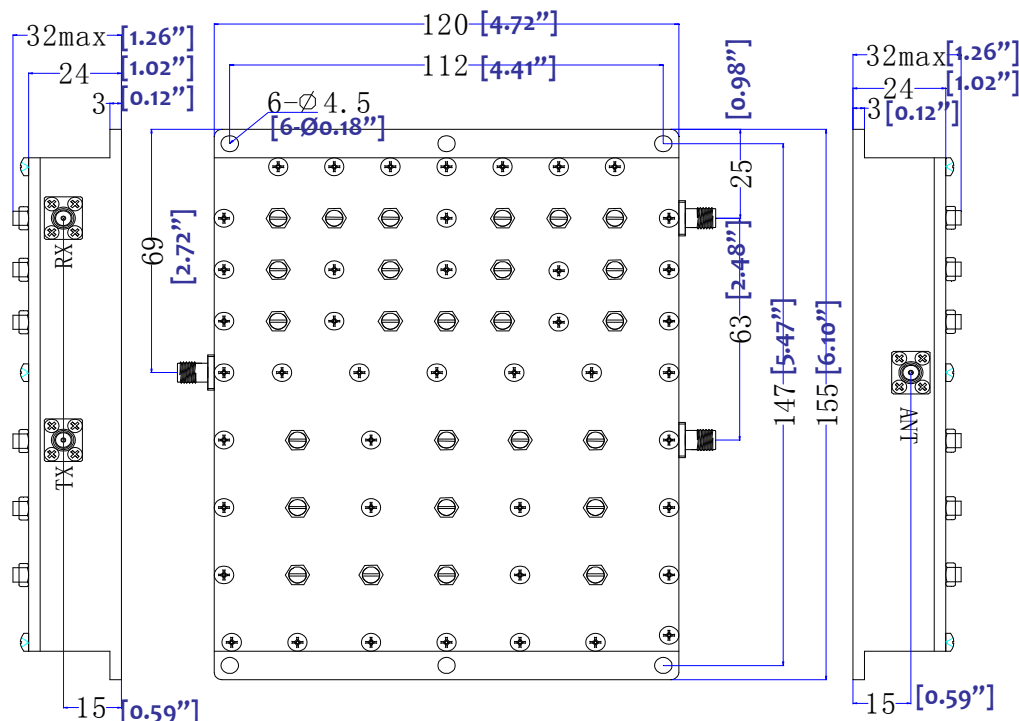


HIGH POWER CAVITY DUPLEXER 2200-2300MHZ & 2360-2395MHZ



RF-LAMBDA

The power beyond expectations

RFDU2G2GD

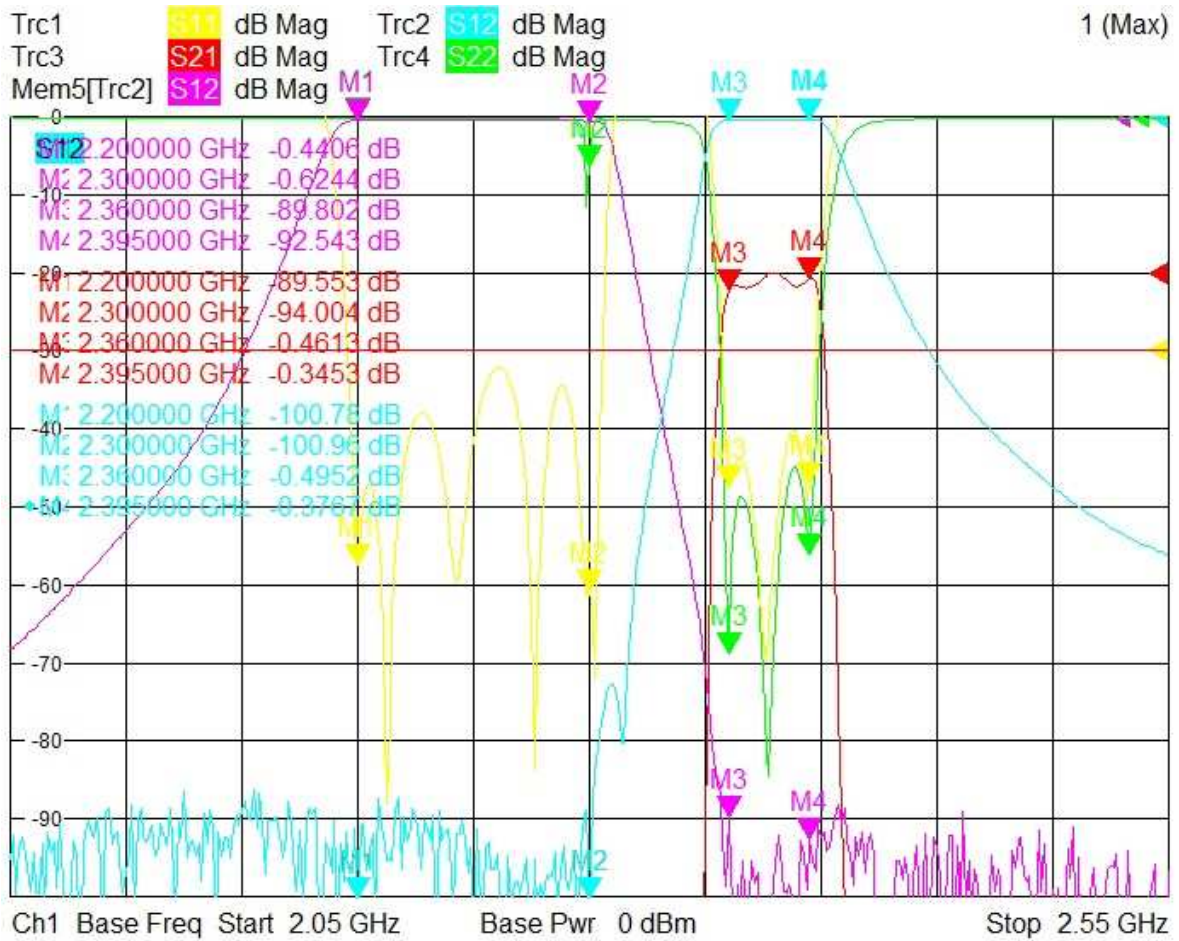

HIGH POWER CAVITY DUPLEXER 2200-2300MHZ & 2360-2395MHZ