





40 dB/100W Attenuator

AR-0030-100-40N

Specifications:

Frequency Range: DC-3 GHz
 VSWR: 1.20:1 Max
 Power: 100 Watts Avg
 Attenuation: 40 dB, ± 2.0 dB
 Impedance: 50 Ohms
 Connectors: N female, N male
 Operating Temp. Range: -20°C to +60°C

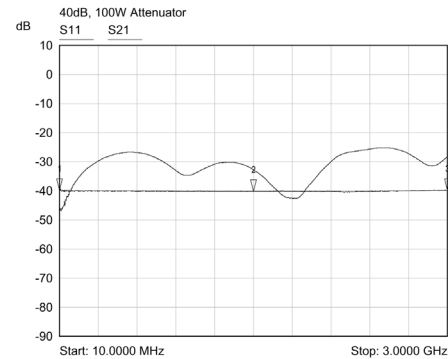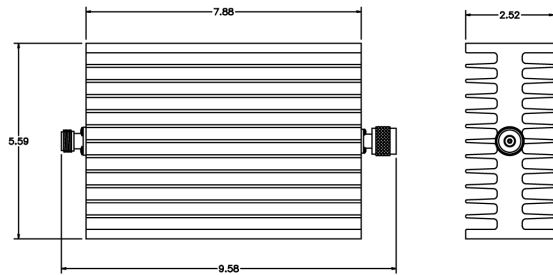

Mkr	Trace	X-Axis	Value	Notes
1 ▾	S21	10.0000 MHz	-39.75 dB	
2 ▾	S21	1.5050 GHz	-40.19 dB	
3 ▾	S21	3.0000 GHz	-39.77 dB	

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com