

ECCOSORB® LS

Lossy, Flexible, Foam Microwave Absorber

Material Characteristics

- ECCOSORB® LS is the most widely known, used, and recommended urethane foam sheet product.
- High loss, low density, and very flexible
- ECCOSORB® LS obtains its microwave properties via a carbon loading system and is therefore, electrically conductive
- Very low cost solution for many applications over the thinner, more expensive rubber absorbers
- Not weatherproof but can be supplied with a weather resistant CERSEAL coating, *see Availability below*
- If UL-94-HF-1 fire retardancy is a requirement, see ECCOSORB® QR-13AF
- Can be easily cut with a knife, scissors, or die

Applications

- ECCOSORB® LS is used to lower cavity Q's in RF amplifiers, oscillators, cabinets containing microwave devices, computer housings, LNB's, and isolation of antennas by insertion loss
- ECCOSORB® LS is also used to reduce surface currents on radiating elements and outer ground-plane type surfaces.
- Reflectivity of an object (metal or otherwise) can be reduced somewhat by applying one or more layers of ECCOSORB® LS to its surface

Availability

- Standard sheets are 24" x 24" (61 cm x 61 cm)
- Standard thicknesses are 1/8" (0.3cm), 1/4" (0.6cm), 3/8" (0.9cm), 1/2" (1.3cm) & 3/4" (1.8cm)
- Upon special request, ECCOSORB® LS can be supplied with an anti-dust coating UMSEAL (UM), to prevent carbon fallout
- ECCOSORB® LS can be supplied with a CERSEAL coating to prevent moisture uptake in high humidity to moderately wet environments upon special request
- For applications requiring ECCOSORB® LS to be in close contact with electrical components, a PEF film is available on request to prevent electrical shorts
- ECCOSORB® LS can also be supplied with a Pressure Sensitive Adhesive (PSA). Product designation denoting ECCOSORB® LS with a PSA is ECCOSORB® LS-XX/SS3
- ECCOSORB® LS is available in other sizes and customer specified configurations upon request

Instructions for Use


- Being electrically conductive ECCOSORB® LS could cause a short in some microwave circuits, but only if the material comes in contact with components, *see PEF film under Availability*
- For high loss applications, ECCOSORB® LS-28 and LS-30 are recommended
- ECCOSORB® LS can be securely bonded to itself or to other materials such as metal, wood, and common plastic composites. The recommended adhesive is ECCOSTOCK® 13-111-NF if not ordered from the factory with a PSA.

Typical Properties

Frequency Range	1 to 26 GHz
Service Temperature, °F (°C)	-94 to 200 (-70 to 93)
Color	Black
ϵ'	3 - 20
μ'	1.0
$\tan \delta_m$	0.0
Fire Retardancy	UL 94 HBF

	Attenuation (dB/cm)		Relative Impedance ($ Z /Z_0$)	
	3 GHz	10 GHz	3 GHz	10 GHz
LS-14	1.0	1.7	0.83	0.89
LS-16	1.5	2.3	0.78	0.87
LS-18	3.2	4.7	0.69	0.82
LS-20	4.2	7.0	0.61	0.78
LS-22	7.4	14.9	0.55	0.74
LS-24	11	24	0.25	0.44
LS-26	16	34	0.18	0.31
LS-28	20	40	0.16	0.27
LS-30	24	46	0.13	0.22

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. Use of Information and Material: Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.

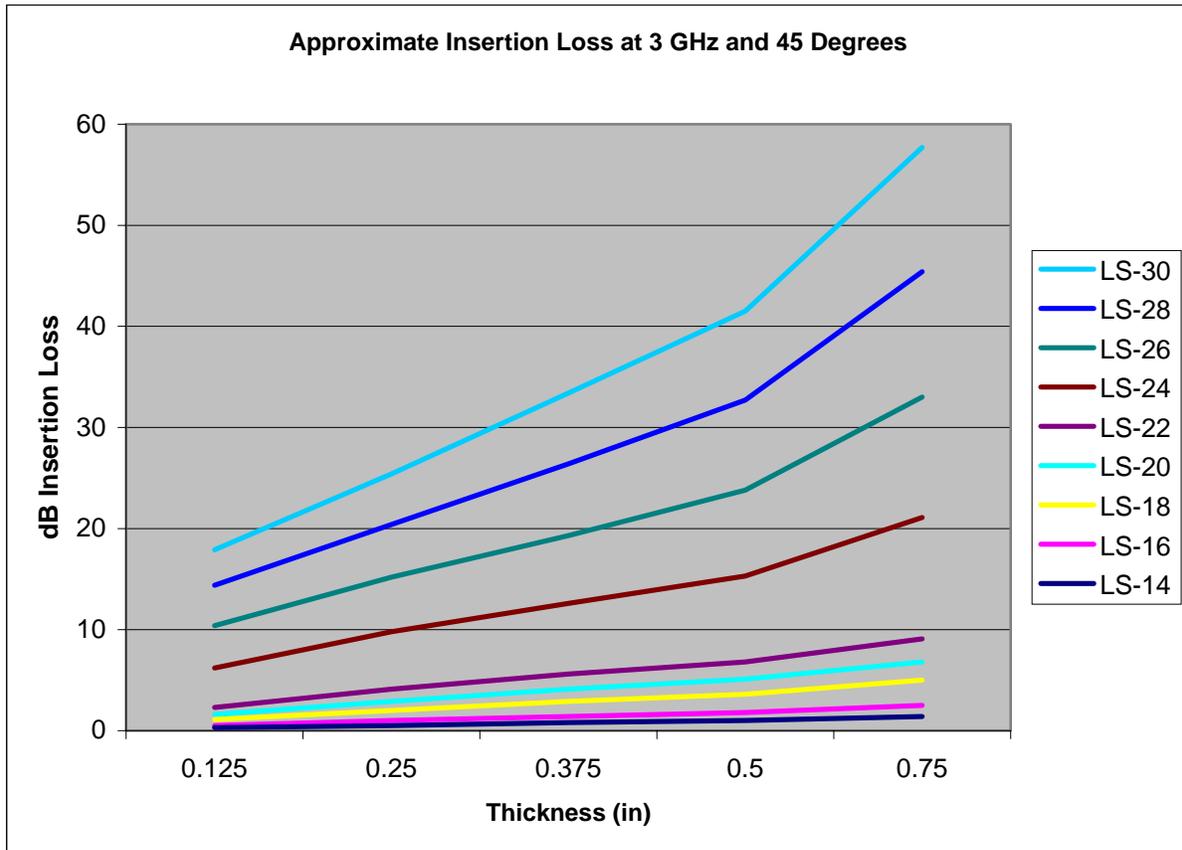

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. *Use of Information and Material:* Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.