


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

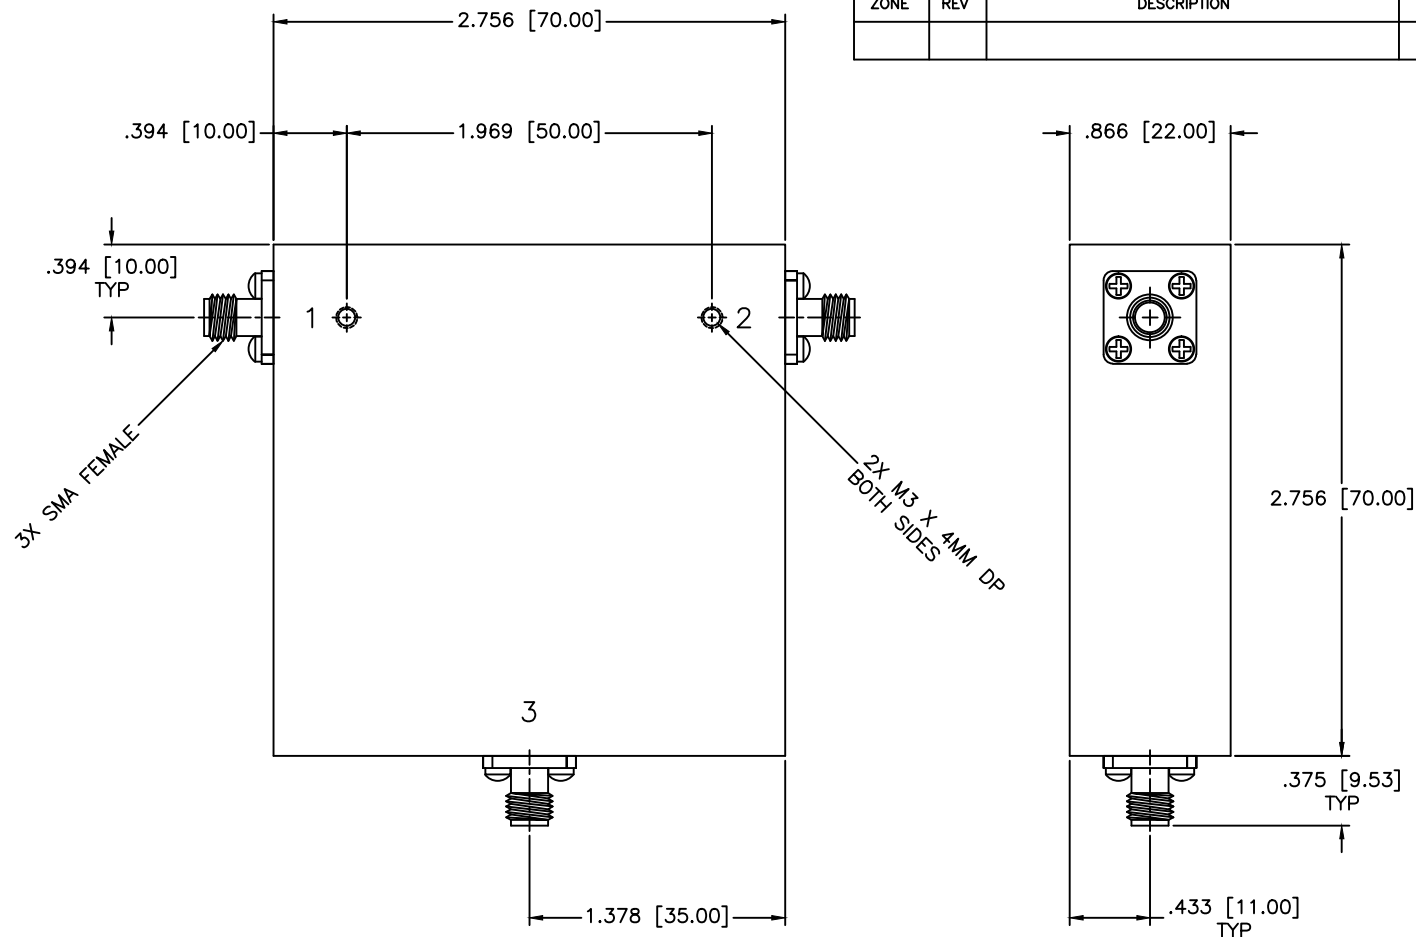

SPECIFICATIONS

Frequency Range: 1.0–2.7 GHz
 Isolation: 15dB Min.
 Insertion loss: 0.90dB Max.
 VSWR: 1.50:1 Max.
 Forward Power: 30 Watts
 Operating Temperature: +10°C to +50°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.05 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR			
		PART NO. CS-168			
DRAWN: Paiboon Luekhamhan DATE: 12-02-2009	DATE: 12-02-2009	CAGE CODE: OD2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		DWG NO. 84649	
APPROVED: T. Nguyen	DATE: 12-02-2009				