


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5004	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM


TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE
RIGHT ANGLE

N FEMALE
FOR BULKHEAD

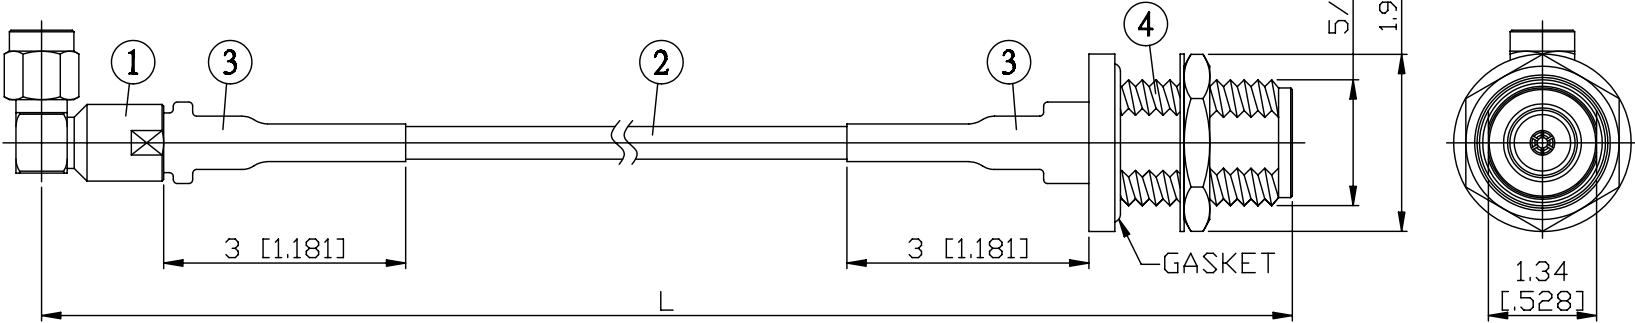

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A39N85-5004-18G50	18	-16.5dB	50 (19.685)
A39N85-5004-18G100			100 (39.370)
A39N85-5004-18G150			150 (59.055)
A39N85-5004-18G200			200 (78.740)
A39N85-5004-18GXXX			CUSTOM LENGTH IN CM

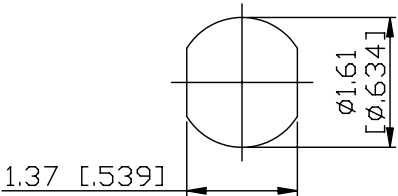

MOUNTING HOLE

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION CABLE ASSEMBLY SMA PLUG R/A
TO N FEMALE FOR BULKHEAD

JYE BAO DRAWING NO.
A39N85-5004-18GXXX