


剥线尺寸 stripping dimensions

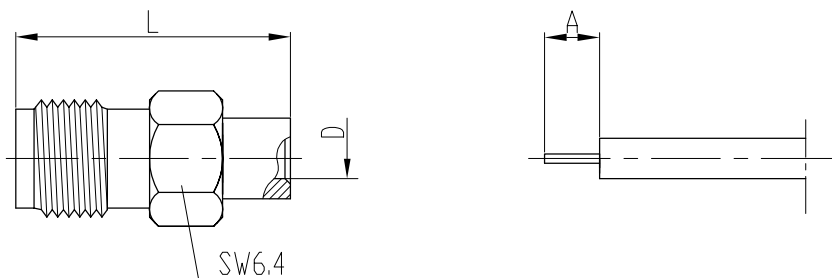

产品型号 type	电缆型号 cable type	D	L	A
SMA-KB2	SFT-50-2-1、RG405/U	ø2.2	15	3.0
SMA-KB2A			13.5	
SMA-KB3	SFT-50-3-1、RG402/U	ø3.6	15	4.0
SMA-KB5	SFT-50-5.2-1	ø6.1	19.6	
SMA-KB5A	1/4" semi-rigid cable	ø6.5		

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- VSWR: ≤1.35
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 电压驻波比: ≤1.35
- 插拔次数: 500次

Application: MIL-C-39012/55D


执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium copper, gold plated
- Bodies: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1	
NAME		DATE	SMA-KB2 RF COAXIAL CONNECTOR 西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.
DRAWN			
CHECKED			
APPROVED			