
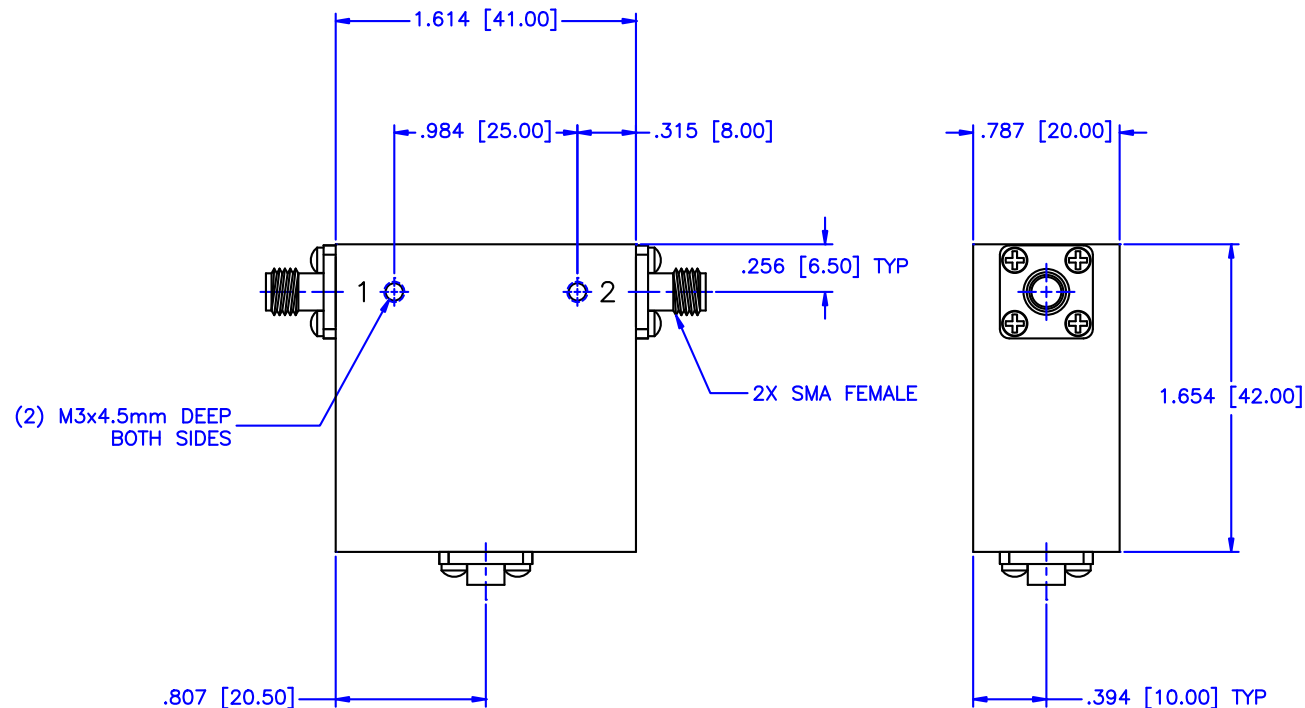


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

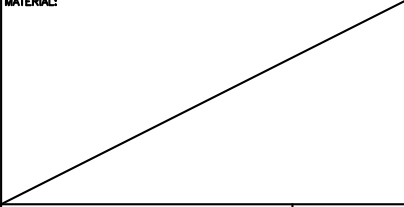

SPECIFICATIONS

Frequency Range: 2–6 GHz
 Isolation: 13dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.60:1 Max.
 Operating Temperature: -10°C to +70°C
 Circulator Power: 20 Watts

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 08-16-2011		DRAWING TITLE: COAXIAL ISOLATOR		
APPROVED: T. Nguyen DATE: 08-16-2011		PART NO. IS-144		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: 0D2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO. 85820