

Power Splitter/Combiner

SCPJ-2-750

2 Way-180° 50Ω

30 to 750 MHz



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8

Features

- wideband, 30 to 750 MHz
- excellent amplitude unbalance, 0.3 dB typ.

CASE STYLE: YY161
PRICE: \$27.95 ea. QTY (1-9)

Applications


- VHF/UHF
- receivers/transmitters
- communication systems

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
30-750	24	18	21	16	20	16	0.7	1.5	1.5	2.2	1.5	2.2	3	4	6	0.8	0.8	0.8

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Outline Drawing

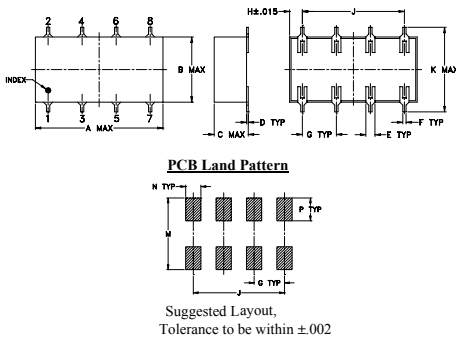


Outline Dimensions (inch)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-50+
Suggested PCB Layout (PL-060)



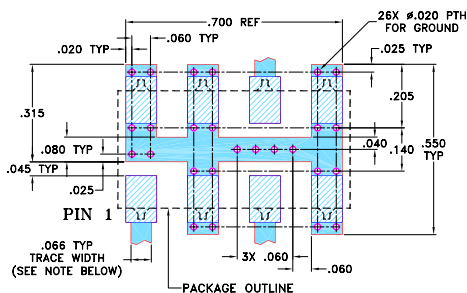


- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB) S-1	Total Loss ¹ (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
30.00	3.72	3.34	0.38	28.93	180.00	1.08	1.24	1.14
100.00	3.83	3.43	0.40	26.61	179.58	1.11	1.25	1.14
150.00	3.91	3.53	0.37	25.03	179.40	1.15	1.26	1.14
200.00	3.96	3.59	0.37	23.65	179.27	1.18	1.27	1.15
250.00	4.03	3.68	0.36	22.51	179.26	1.22	1.29	1.16
300.00	4.08	3.75	0.33	21.57	179.12	1.25	1.31	1.17
350.00	4.15	3.85	0.30	20.83	179.27	1.29	1.33	1.18
400.00	4.22	3.94	0.28	20.24	179.31	1.32	1.35	1.18
425.00	4.24	3.97	0.27	20.01	179.44	1.33	1.36	1.19
500.00	4.31	4.11	0.21	19.54	179.84	1.36	1.38	1.20
525.00	4.30	4.13	0.16	19.43	170.03	1.37	1.39	1.20
575.00	4.37	4.23	0.14	19.39	180.44	1.37	1.40	1.21
630.00	4.38	4.32	0.06	19.49	179.09	1.37	1.41	1.23
675.00	4.44	4.43	0.01	19.77	178.47	1.36	1.42	1.26
750.00	4.52	4.61	0.10	20.51	177.51	1.33	1.44	1.32

1. Total Loss = Insertion Loss + 3dB splitter loss.

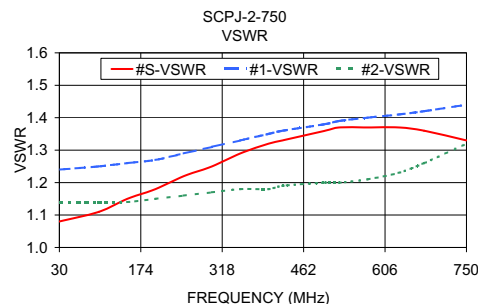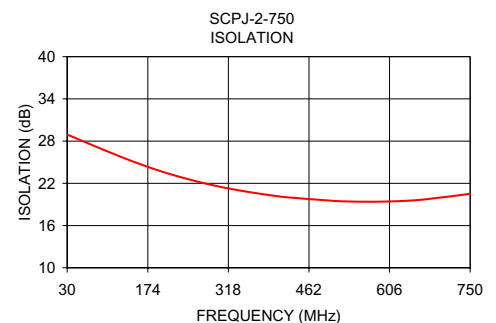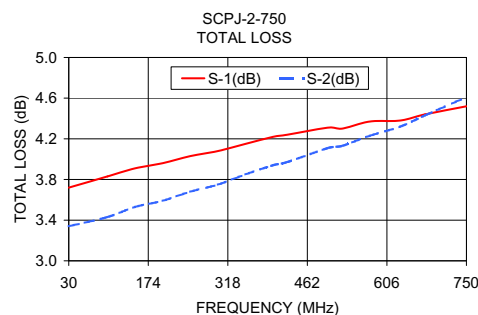

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M127604
SCPJ-2-750
HY/TD/CP/AM
100621