
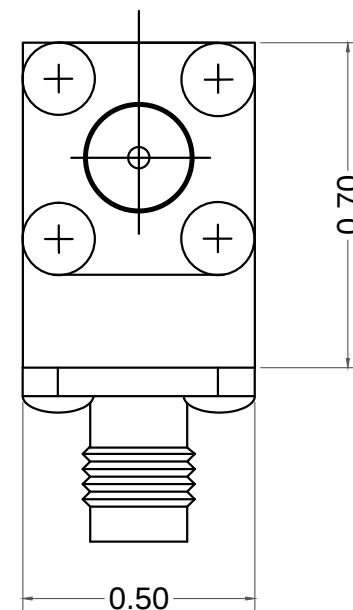


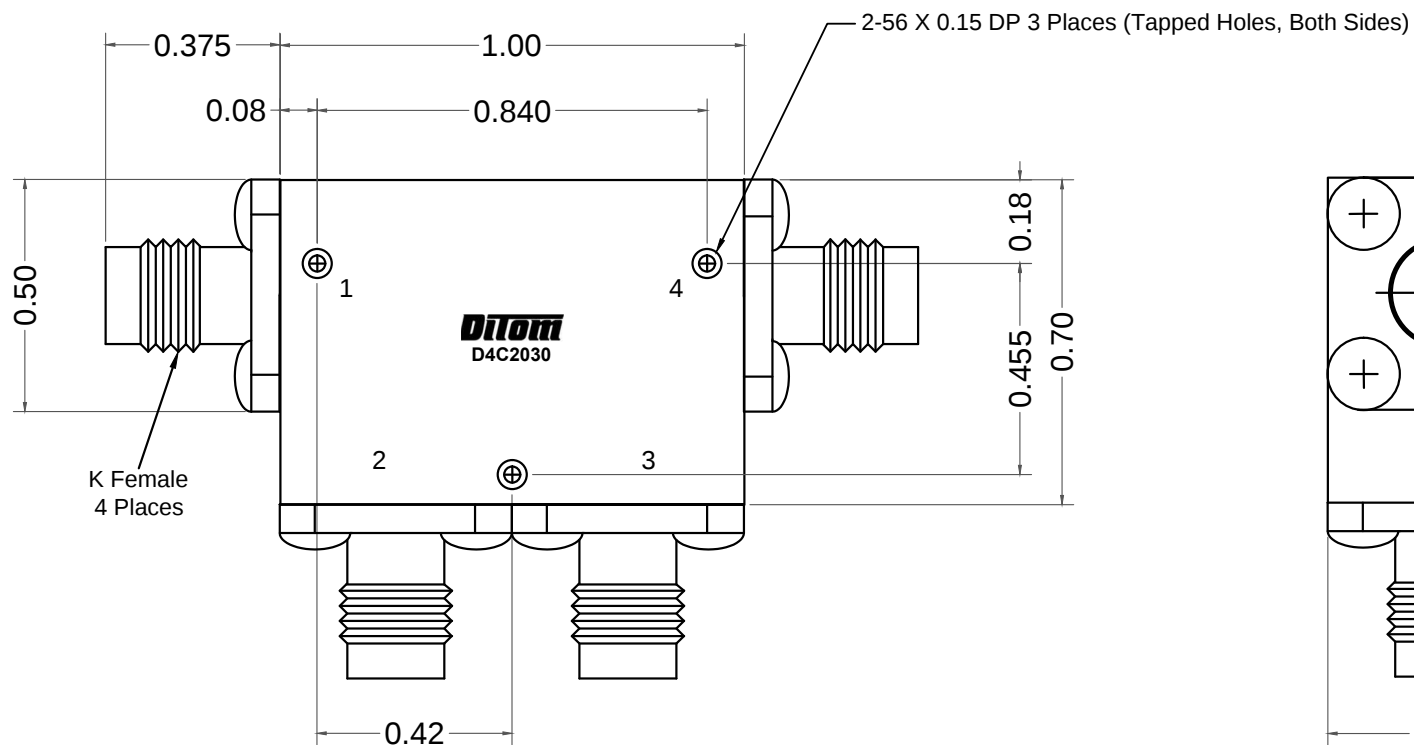

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	20.00 - 30.00
ISOLATION (dB):	14 MIN (PER JUNCTION)
INSERTION LOSS (dB):	1.00 MAX (PER JUNCTION)
VSWR:	1.50 MAX
POWER: AVG (ALL PORTS):	2W
PEAK:	30W

MECHANICAL SPECIFICATIONS

CONNECTORS:	K-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-20° to +65°C
WEIGHT (APPROX):	1.60 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		Dilom MICROWAVE INC. Fresno, California, USA	
TOLERANCE XX±0.03 XXX±0.010		TITLE 20.00 - 30.00 GHz Circulator	
SCALE 5:1		MODEL NO D4C2030	REV