



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: Nov, 22, 2007

Product Name: SAW Filter 1642.5MHz SMD 2.5X2.0 mm

TST Parts No.: TA0788A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 11,22,2007



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1642.5 MHz

MODEL NO.: TA0788A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 5 dB_m
2. DC voltage: 5 V
3. Operating Temperature: -40°C to +90°C
4. Storage Temperature: -40°C to +95°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item			Min.	Typ.	Max.
Center frequency	F _c	(dB)	-	1642.5	-
Insertion loss within 1625 ~1660 MHz	IL	(dB)	-	2.1	3.5
Amplitude ripple (p-p) within 1625 ~ 1660 MHz		(dB)	-	0.9	2.0
Attenuation (Reference level from 0 dB)					
DC ~ 1500 MHz		(dB)	21	28	-
1525 ~ 1559 MHz		(dB)	30	34	-
1700 ~ 2050 MHz		(dB)	30	33	-
2050 ~ 3500 MHz		(dB)	25	33	-
VSWR within 1625 ~1660 MHz			-	1.5	2.3
Source impedance	Z _s	(Ω)	-	50	-
Load impedance	Z _L	(Ω)	-	50	-

Note1. No matching network required for operation at 50 Ω


C.OUTLINE DRAWING:

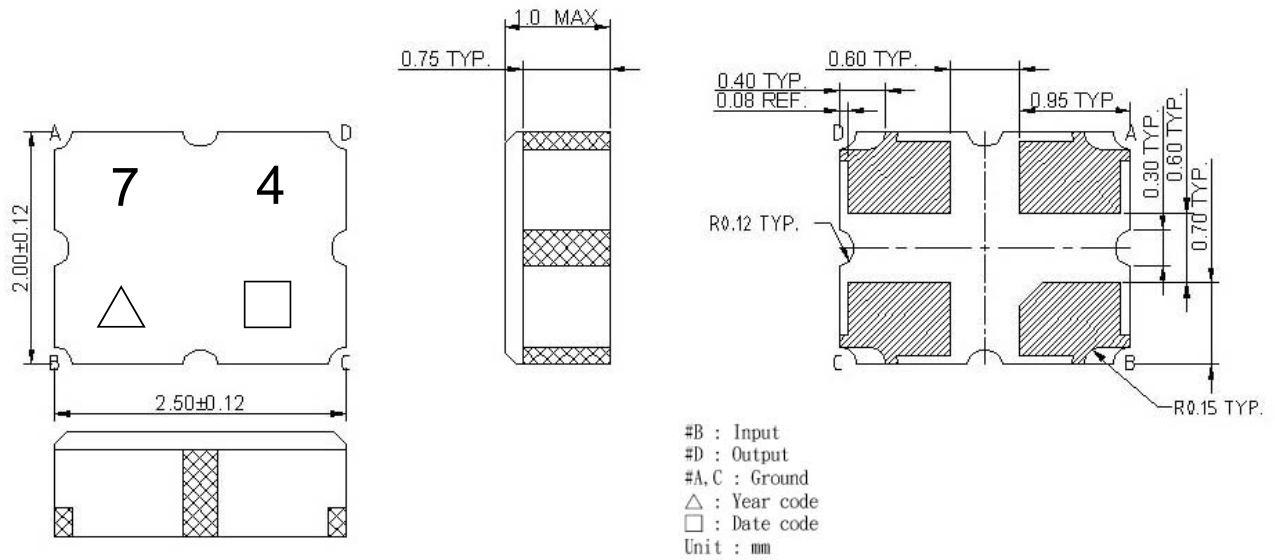


D. MEASUREMENT CIRCUIT:

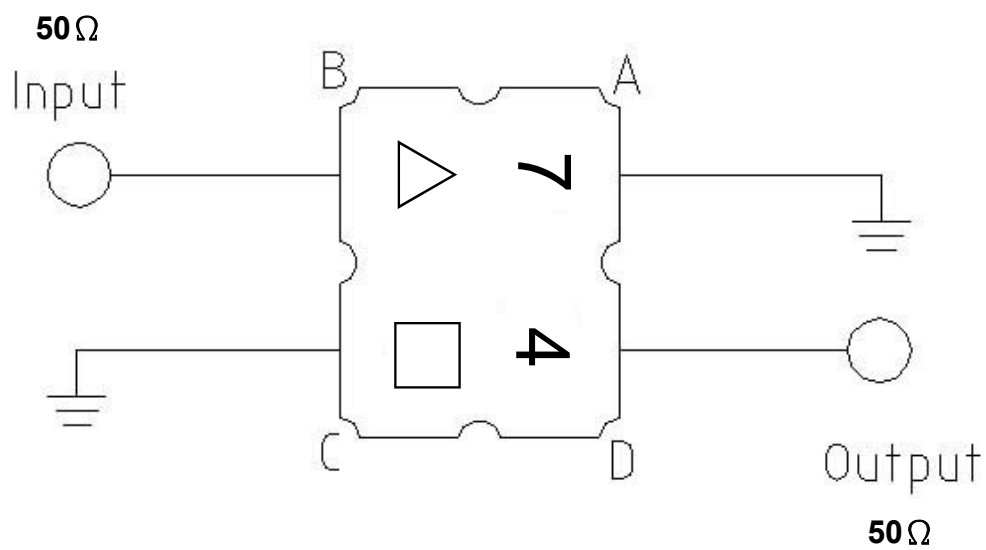

E. PCB Footprint:


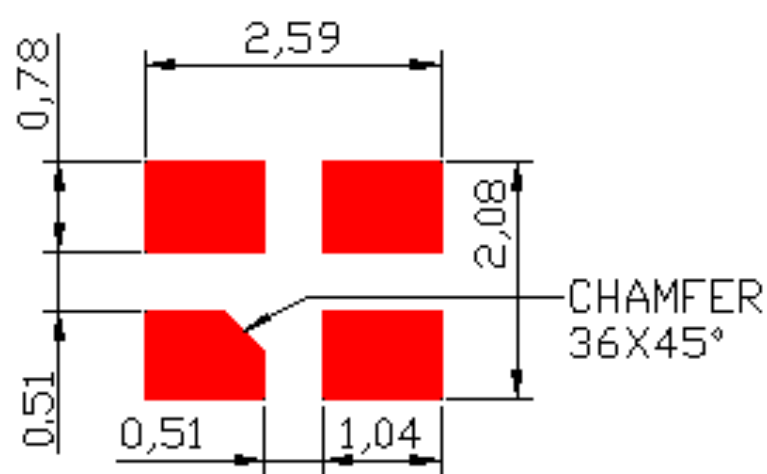


F. Frequency Characteristics : Transfer function


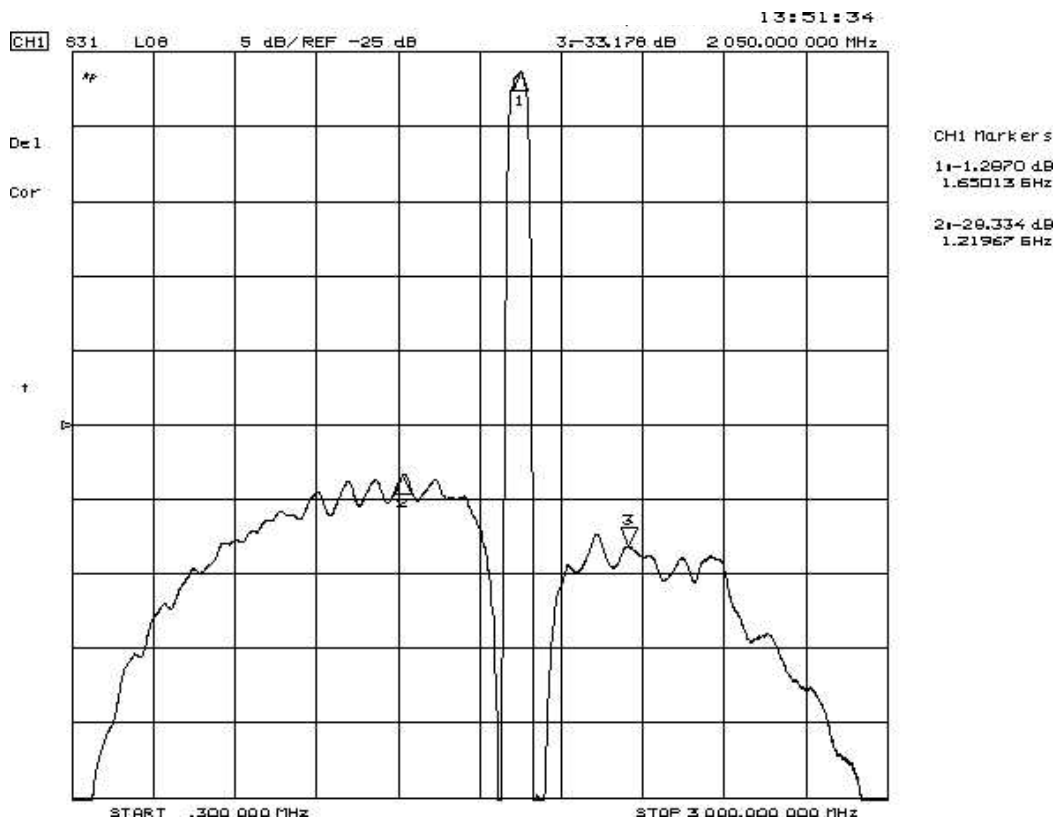


Reflections Functions :

S11 VSWR

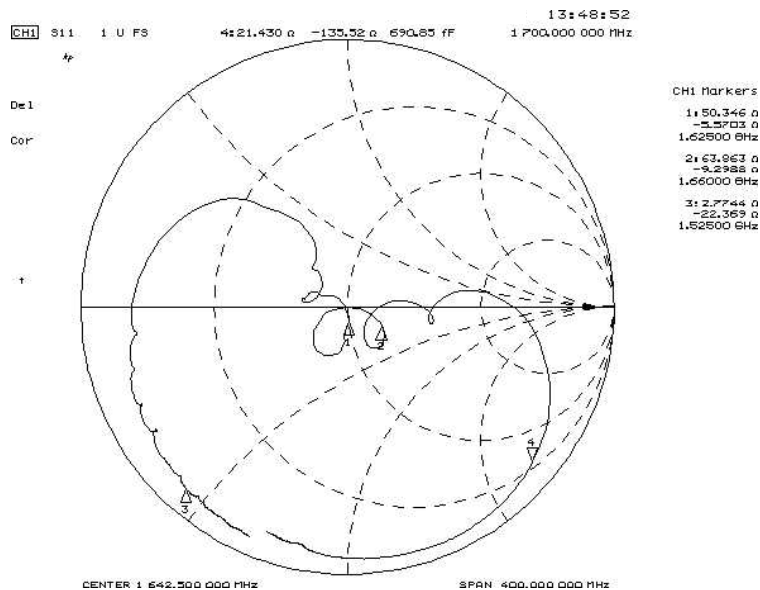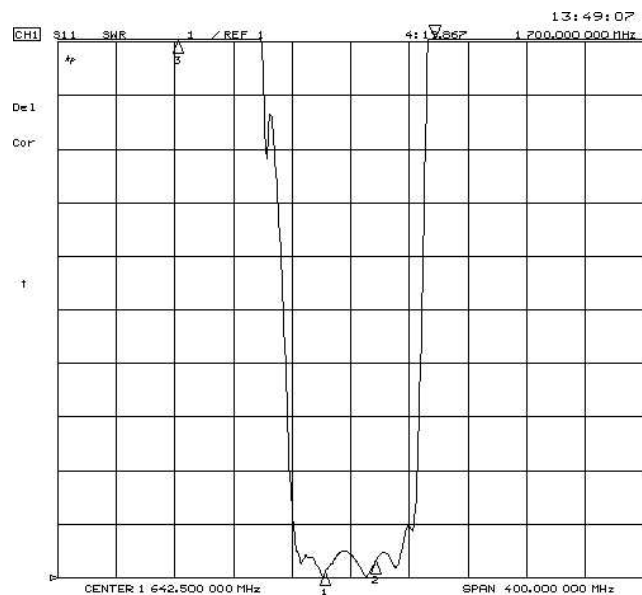


S22 VSWR

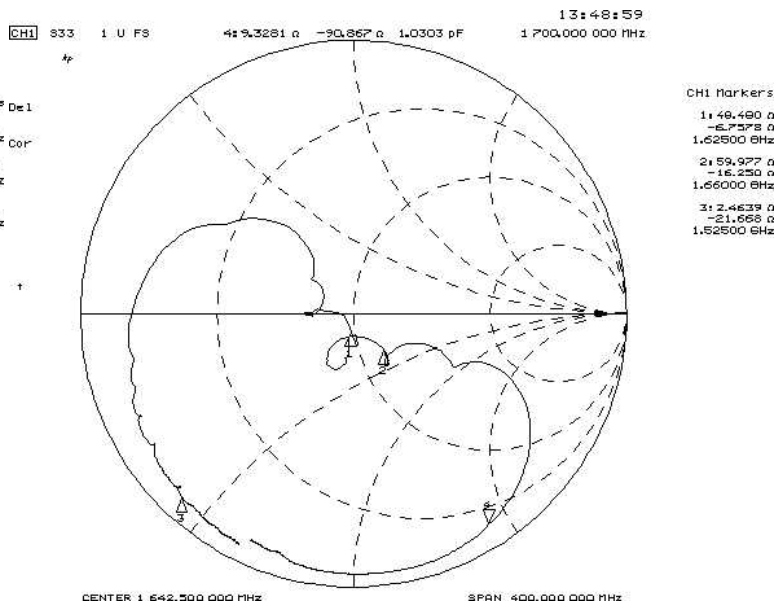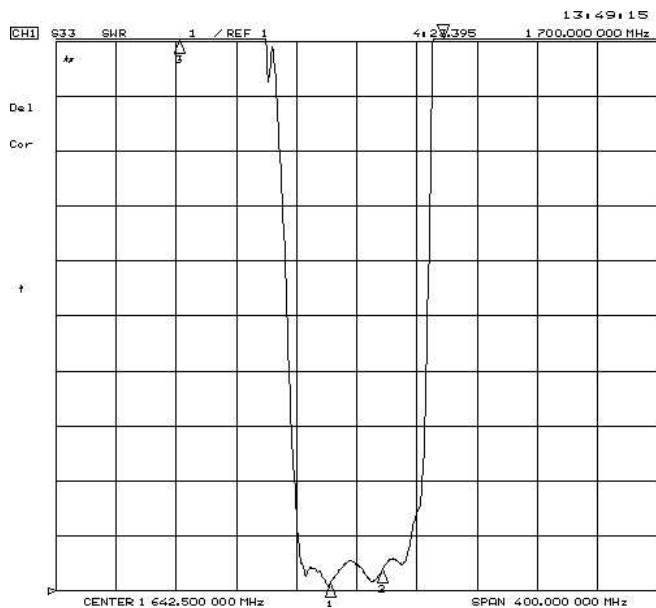


G. PACKING:

1. REEL DIMENSION

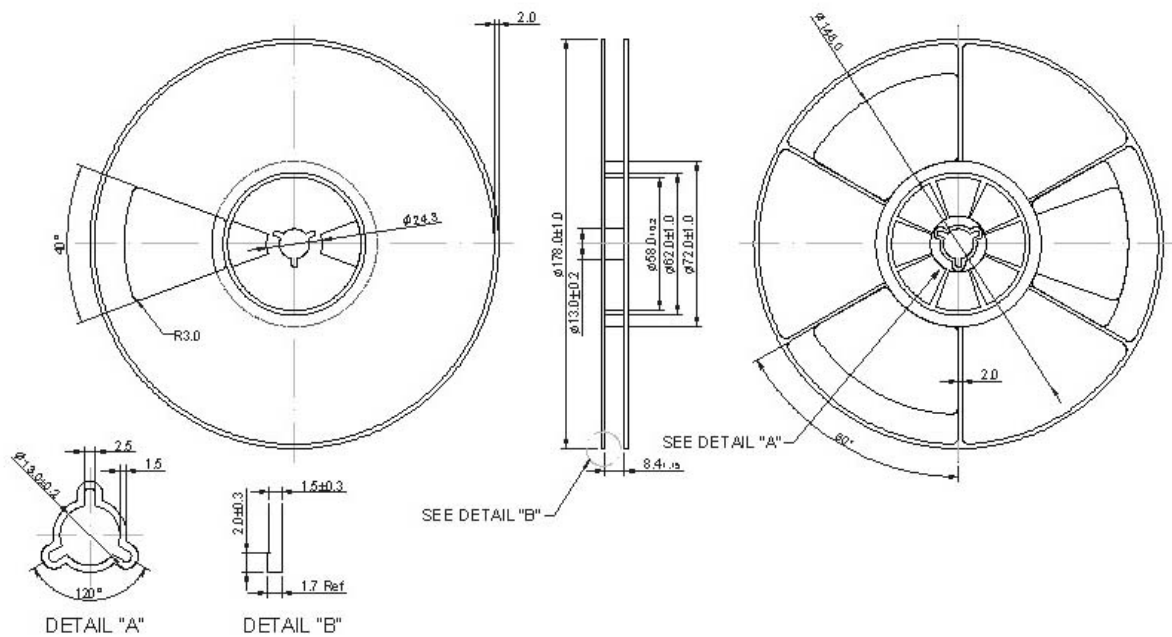

2. TAPE DIMENSION

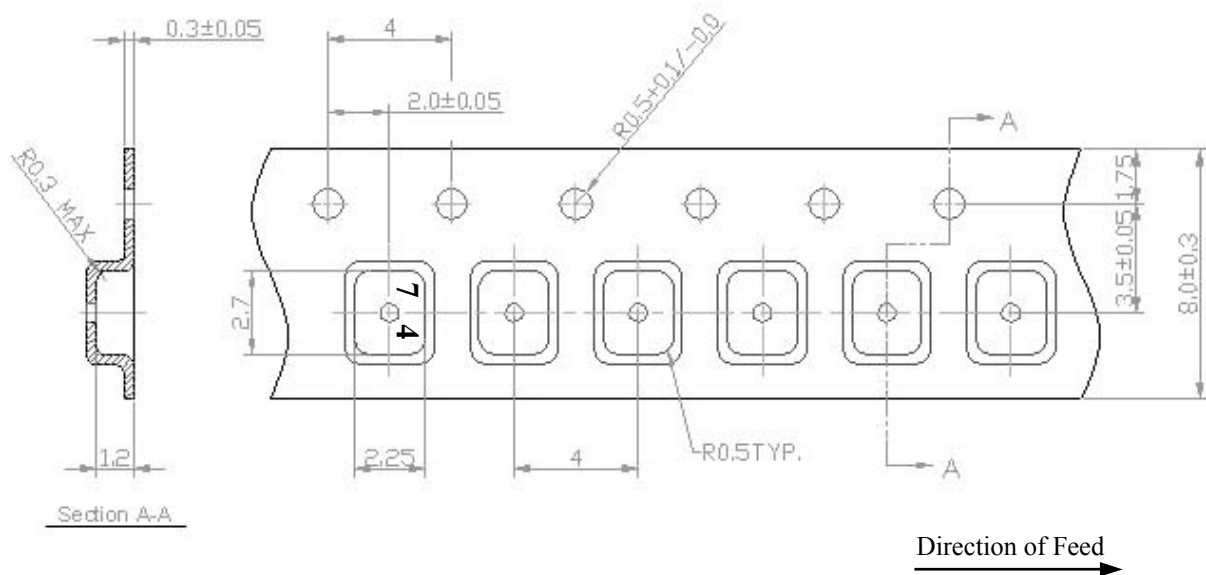

G.RECOMMENDED REFLOW PROFILE:

