




BIASED COAXIAL SCHOTTKY DETECTORS (WITH INTERNAL PADS OR RESISTORS)

This family of padded input detectors allows for higher input power range and better VSWR than pure biased schottky units. They come in a variety of package styles. Module versions for microstrip or stripline applications are also available.

Each detector model contains:

- Input Impedance Matching
- DC return
- RF bypass capacitor
- Detector diode

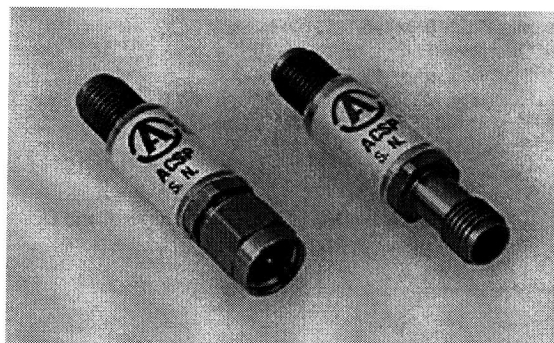

Applications:

- Transmitter Monitoring
- Radar Equipment
- Missile Guidance Systems
- Input to Low-Noise Amplifiers
- Broadband Or Narrowband ECM Receivers
- Power and Signal Monitors
- Doppler Radar and Beacon Receivers
- Matched units available for Multi-channel Receivers, Amplitude Comparator Systems and Discriminators

Frequency Range (GHz)	Part (1) Number	Minimum(2) Sensitivity K (mV/mW)	Flatness vs Frequency (+/-dB)	Typical (3) VSWR	Nominal (4) Video Capacitance (pF)	Standard Case Styles	Optional Case Styles
0.005 - 0.05	ACSP2531N	750	0.1	2.0:1	1000	C3	C8,C15
0.01 - 0.05	ACSP2609N	1800	0.2	2.0:1	470	C3	C8,C15
0.05 - 0.5	ACSP2543N	1600	0.3	2.0:1	270	C3	C8,C15
0.01 - 4	ACSP2755N	1800	0.4	2.0:1	270	C3	C8,C15
0.1 - 1	ACSP2761N	1200	0.2	2.0:1	1000	C3	C8,C15
0.01 - 4	ACSP2655N	600	0.4	1.25:1	270	C3	C8,C15
4 - 8	ACSP2602N	600	0.3	1.5:1	10	C3	C8,C15,C32
8 - 12	ACSP2667N	750	0.5	1.9:1	10	C3	C8,C15,C32
0.01 - 20	ACSP2644N	500	1.0	1.8:1	12	C3	C15,C32
0.01 - 20	ACSP2643N	900	1.5	2.8:1	75	C3	C15,C32

NOTES:

- 1) Standard output polarity is negative. If positive output is required, substitute "P" for "N" in part number.
- 2) Measured into an open circuit load (>10k ohm).
- 3) VSWR measured at or below -20dBm input power level.
- 4) Video capacitance is used for RF bypass. This value can be changed if required for video response time or other considerations. Contact the factory if value other than those shown are needed.
- 5) Standard bias is 100 microamps.
- 6) Zero bias schottky versions are available for most of listed biased schottky models with only minor differences in specifications.
 - a. The zero bias schottky has an impedance of several thousand ohms.
 - b. Zero bias schottky detectors exhibit less sensitive TSS due to the high diode impedance (typically a 3dB reduction).
 - c. The temperature performance of the zero bias schottky is poor when operating at low input power levels. This difference becomes small at high levels (above 0dBm input power). The part number of zero bias versions includes a "Z" following the polarity indicator.



ENVIRONMENTAL SPECIFICATIONS:

MIL-E-5400, MIL-STD-202, MIL-E-16400

Operating Temp: -65°C to +125°C

Storage Temp: -65°C to +150°C

Humidity: MIL-STD-202F, M103, Cond B

Shock: MIL-STD-202F, M213, Cond B

Altitude: MIL-STD-202F, M105, Cond B

Vibration : MIL-STD-202F, M204, Cond B

Thermal Shock: MIL-STD-202F, M107, Cond A

Temperature Cycle: MIL-STD-202F, M105C, Cond D

Maximum Input Power: +20dBm

SCREENING :

Standard Screening:

Internal Visual per MIL-STD-883, Method 2017

Temperature Cycle: -65°C to +100°C, 10 cycles

Optional High-Rel Screening (Ref MIL-PRF-38534):

Internal Visual per MIL-STD-883, Method 2017

Stabilization Bake per MIL-STD-883, Method 1008


Temperature Cycle per MIL-STD-883, Method 1010

Constant Acceleration per MIL-STD-883, Method 2001


Burn-in per MIL-STD-883, Method 1015

Leak Test per MIL-STD-883, Method 1014


External Visual per MIL-STD-883, Method 2009




CASE STYLE C3

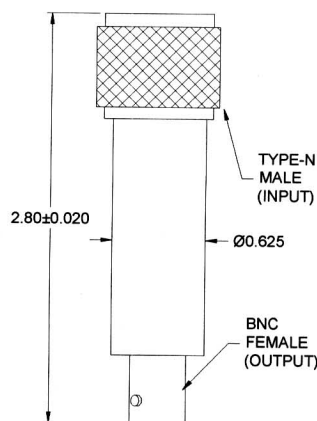

CASE STYLE C8

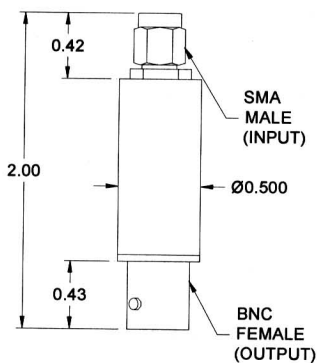

CASE STYLE C15



CASE STYLE C32

Part Number Ordering Information:

Example: ACSP2667NZC3X20

ACSP2667: Biased Coaxial Schottky Detector (With internal pad), 8 - 12GHz

N: Negative output polarity

Z: Zero bias version (omit for biased version)

C3: Package type

X: No video protection (omit for inclusion of video protection)

20: 20pF custom output capacitance (omit for standard value)

SPRP-0303B