
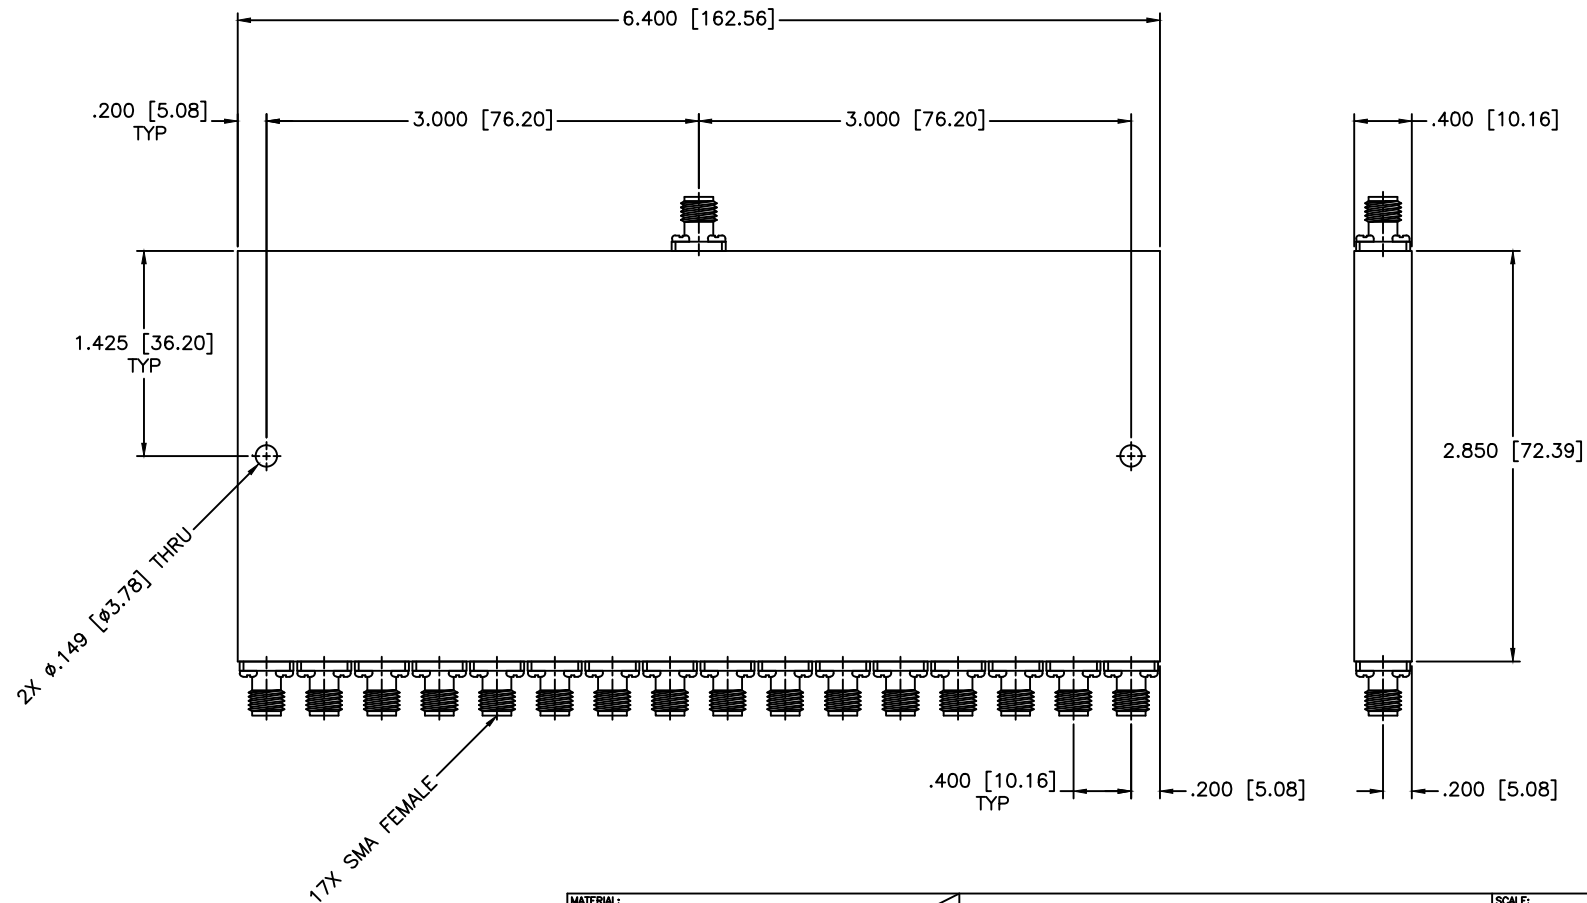


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 5.8–6.4 GHz
 VSWR In/Out: 1.50:1/1.25:1 Max.
 Amplitude Balance: ± 1.0 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Insertion Loss: 2.9dB Max.
 Isolation: 22dB Min.
 Power: 30W (Load vswr @ 1.2)

MATERIAL:		MCLI		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
						SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE: 16-WAY POWER DIVIDER			
				PART NO. PS16-20			
DRAWN: Paiboon Luekhamhan		DATE: 11-07-1997		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)			
APPROVED: T. Nguyen		DATE: 11-07-1997		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	
				SIZE: N/A		REV: N/A	
				DO NOT SCALE THE DRAWING		DWG NO. 80329	