



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 319-1
SLANT SHEET	MIL-PRF-39012/139 REF.
RECOMMENDED MATING TORQUE	2 IN-LBS. NOM.
COUPLING PROOF TORQUE	7 IN-LBS NOM.
COUPLING NUT RETENTION	60 LBS. MIN.
FORCE TO ENGAGE	2 LBS. MIN.
FORCE TO DISENGAGE	2 LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	4 LBS. MAX.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MAX.
CABLE RETENTION	10 LBS. MIN.
MASS	1.55 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	40 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
18 - 40GHz	1.25:1 MAX
INSERTION LOSS	0.03 √f (GHz)dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	750 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	190 Vrms MIN. @70,000 FEET
RF HIGH POTENTIAL	500 Vrms MAX.
CONTACT RESISTANCE (INNER)	4.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65 °C TO 165 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
COUPLING NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
BODY	STEEL, CORROSION RESISTANT PER ASTM-A-582, UNS NO. S30300, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
GASKET	SILICONE RUBBER PER ZZ-R-765
CONTACT	BERYLLIUM COPPER, ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
DIELECTRIC STOP	POLYETHERMIDE THERMOPLASTIC, (ULTEM 1000), ASTM-D-5205
INSULATOR	TFE FLUOROCARBON PER ASTM-D-1710
APPLICATION	
CABLE(S)	092 SERIES CABLE
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

REV	DESCRIPTION	DATE	BY	APPVD	CHKD
1	PRELIMINARY RELEASE - ESR 814505	9/29/2008	MJM	RS	MJM

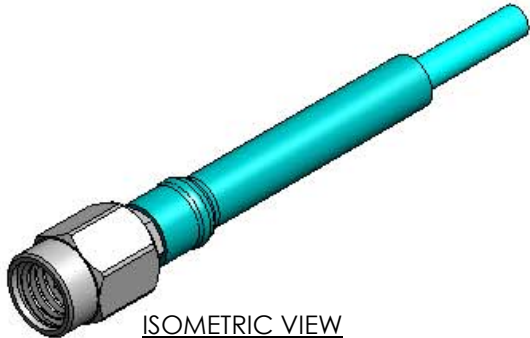

ISOMETRIC VIEW  
SCALE 2:1

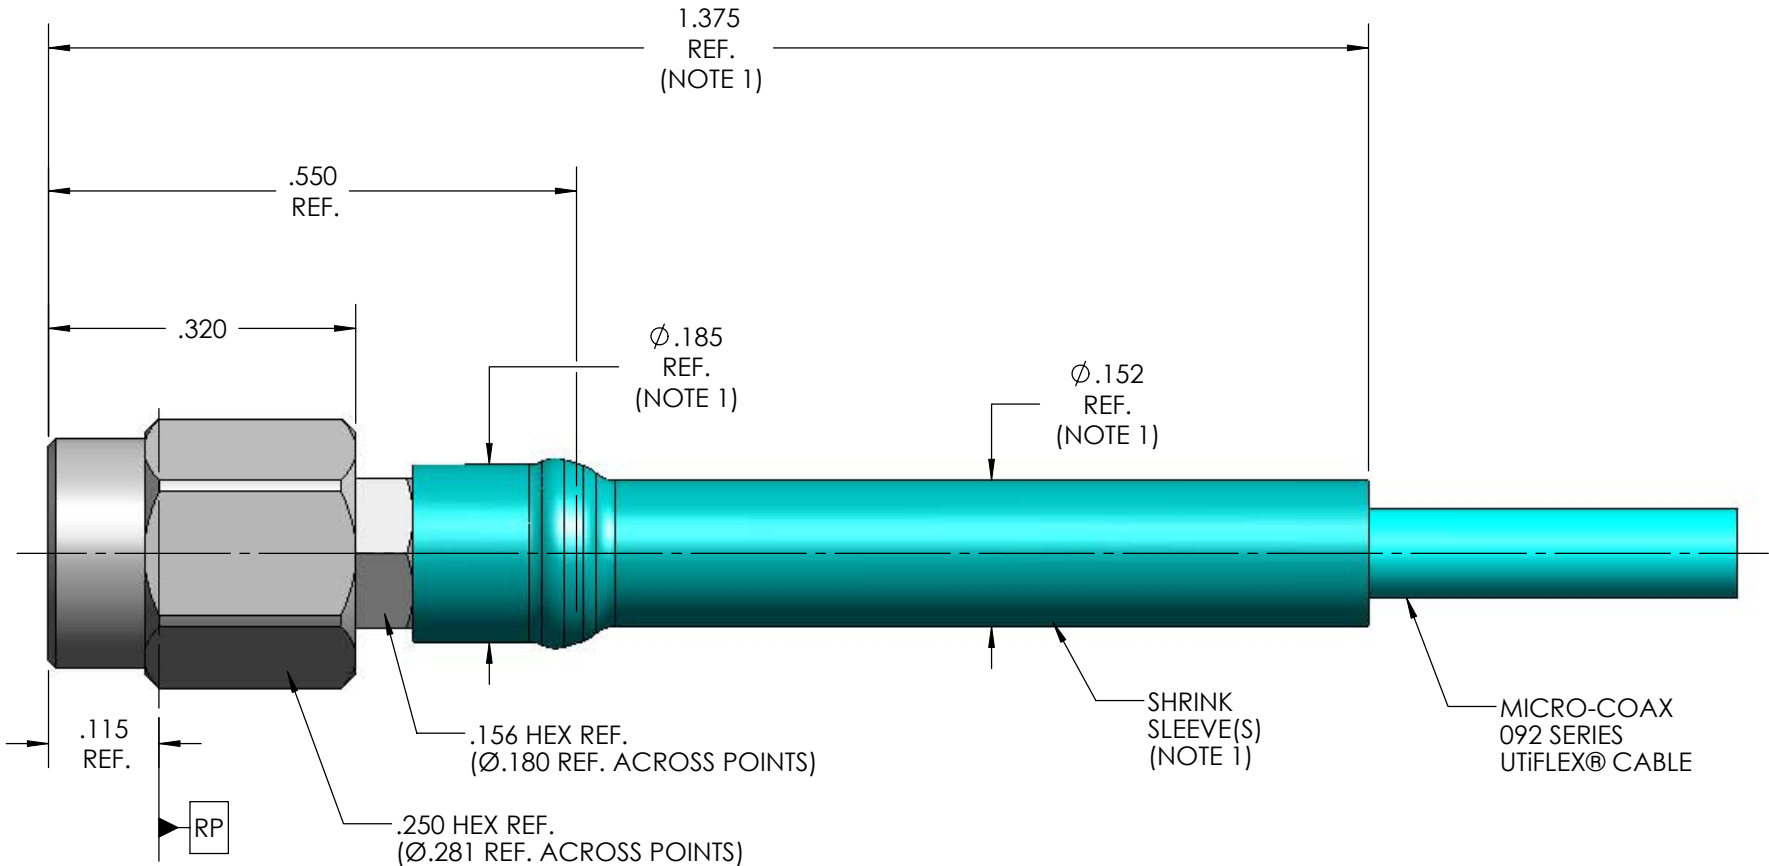

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div>MICRO-COAX®</div> <div>Leading the way in transmission line solutions.</div> <div>Copyright Micro-Coax, Inc.</div>					
		DWN.	MJM	9/29/08							
		CHKD.	MJM	9/29/08							
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		SSMA PLUG, 092 SERIES									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV		
.XXX	± .005			64639	B	5:1	1 OF 1	SD904926	1		
.XXXX	± .0010										
ANGLES	± 2°										

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.