

HN/M CLAMP CONNECTOR RG8 RG213 RG225 RG393

SC4821

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-10 GHZ
IMPEDANCE: 50 OHMS


MECHANICAL:

MATERIAL BODY: BRASS
BODY PLATING: NICKEL
CENTER CONTACT: BRASS
CONTACT PLATING: Au
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A
OP. TEMP RANGE: -65°C to +165°C

ROHS COMPLIANT

ASSEMBLY INSTRUCTIONS

1. STRIP CABLE TO DIMENSIONS SHOWN
2. SLIDE NUT, WASHER, AND GASKET ONTO CABLE
3. INSERT CABLE CENTER CONDUCTOR UNTIL CABLE DIELECTRIC LIES FLUSH AGAINST CENTER CONTACT
4. SOLDER CENTER CONTACT TO CENTER CABLE CONDUCTOR
5. SLIDE BRAID CLAMP UNTIL IT SEATS AGAINST CABLE JACKET
6. FOLD BACK BRAID WIRE TO COVER ON OUTSIDE OF BRAID CLAMP
7. INSERT CABLE ASSEMBLY AND HARDWARE ONTO CONNECTOR BODY
8. SCREW AND TIGHTEN NUT

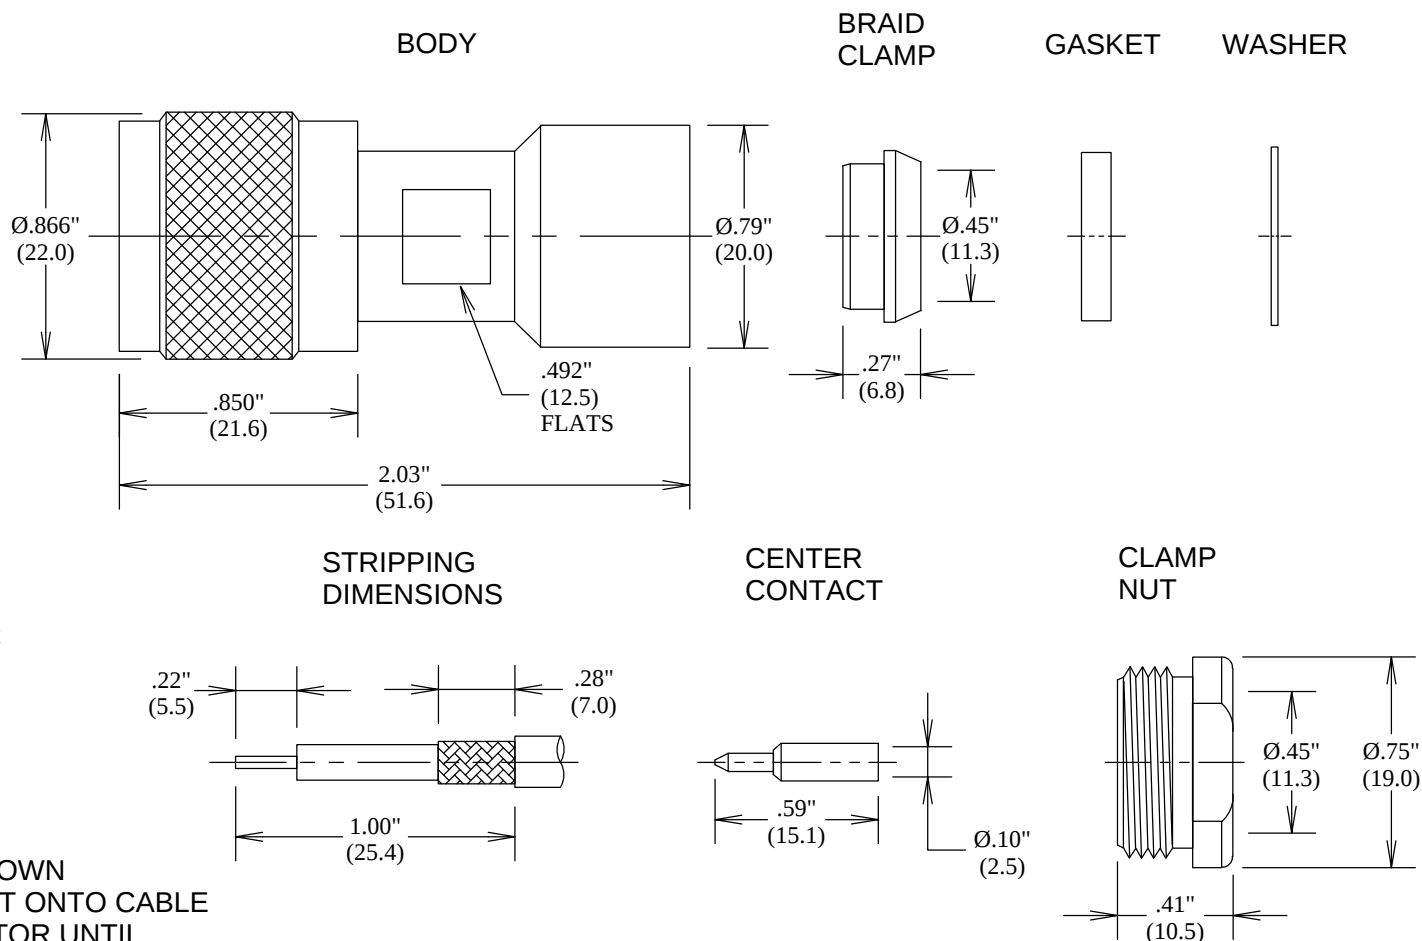

		FAIRVIEW MICROWAVE INC.	
		ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
		TITLE	
		HN/M CLAMP CONNECTOR RG8 RG213 RG225 RG393	
	SIZE	CAGE CODE	DWG NO
ALL DIMENSIONS IN inches(MM) Typical	A	3FKR5	SC4821
	SCALE		SHEET
			--