

EPASTERNACK[®] THE ENGINEER'S RF SOURCE

50 Ohm SMA Circulator Operating From 11 GHz to 18 GHz And 10 Watts With 20 dB Isolation

TECHNICAL DATA SHEET

Configuration Connector 1 Connector 2 Connector 3 Frequency Range Design

11 GHz to 18 GHz Circulator

SMA Female

SMA Female

SMA Female

Electrical Specifications (Values at 25°C, sea level)

Minimum	Typical	Maximum	Units
11		18	GHz
	50		Ohms
		0.5	dB
		10	Watts
		10	Watts
		1.25:1	
20			dB
	11	11 50	11 18 50 0.5 10 10 10 1.25:1

Mechanical Specifications

Temperature Operating Range Storage Range	-20 to 65 deg C -54 to 85 deg C
Size Length Width Height	1.26 in [32 mm] 0.39 in [9.91 mm] 0.95 in [24.13 mm]
Compliance Certifications (visit w RoHS Compliant REACH Compliant	ww.Pasternack.com for current document) Yes 06/18/2012

Plotted and Other Data

- Notes:
- Values at 25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm SMA Circulator Operating From 11 GHz to 18 GHz And 10 Watts With 20 dB Isolation PE8405

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8405 REV 1.0

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com





PE8405






50 Ohm SMA Circulator Operating From 11 GHz to 18 GHz And 10 Watts With 20 dB Isolation

TECHNICAL DATA SHEET

PE8405

Outline Drawing

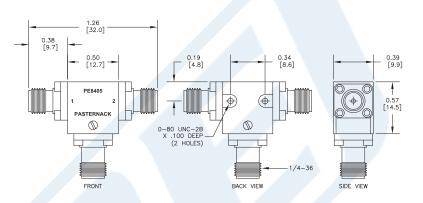

50 Ohm SMA Circulator Operating From 11 GHz to 18 GHz And 10 Watts With 20 dB Isolation from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm SMA Circulator Operating From 11 GHz to 18 GHz And 10 Watts With 20 dB Isolation PE8405

URL: http://www.pasternack.com/50-ohm-sma-circulator-11000-mhz-18000-mhz-10-watts-20-db-pe8405-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

