
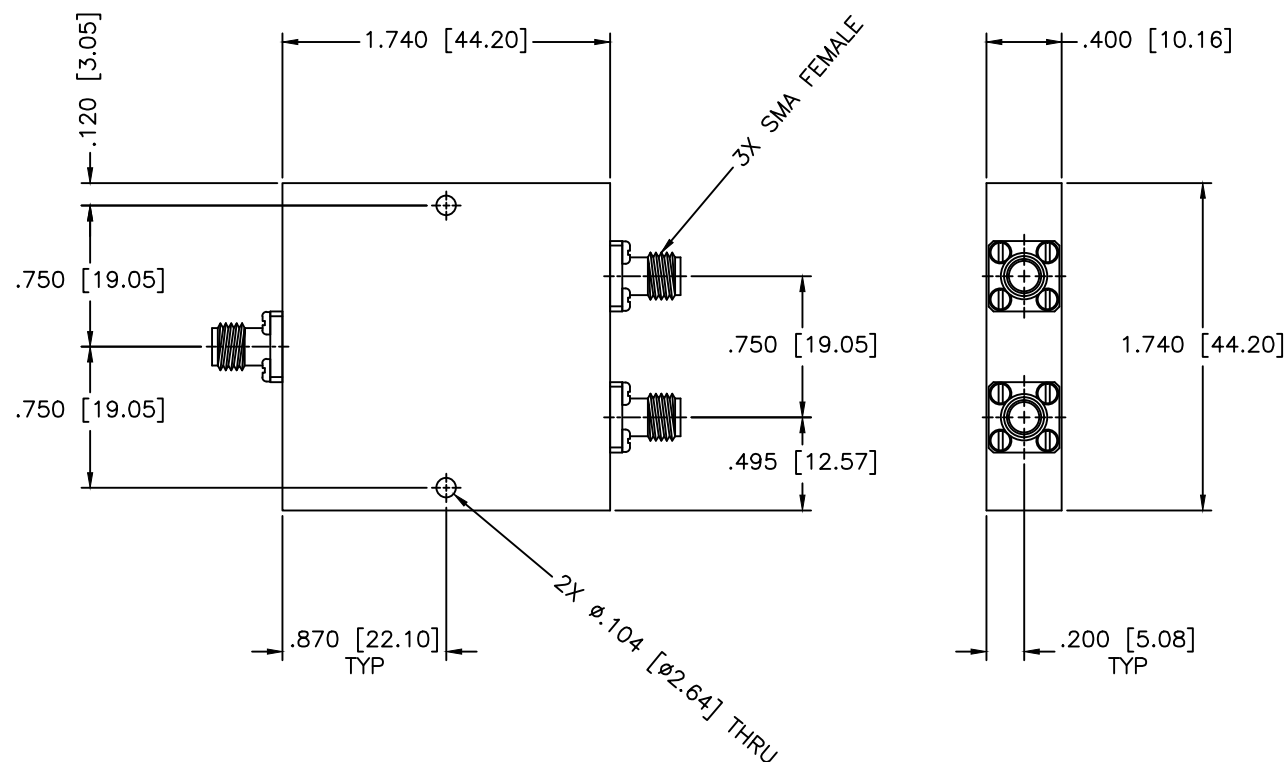


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 0.8–2.4 GHz
Insertion Loss: 0.30dB Max.
Isolation: 18dB Min.
VSWR In/Out: 1.35:1/1.15:1 Max.
Phase Balance: ± 2 Deg. Max.
Amplitude Balance: ± 0.30 dB Max.
Power: 30W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A					
				SHEET:		N/A					
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:				2-WAY POWER DIVIDER			
				PART NO.				PS2-157			
				CAGE CODE:				SIZE:		REV:	
				OD2L5				N/A		N/A	
DRAWN:		DATE:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		DWG NO.		81513			
Paiboon Luekhamhan		06-25-1999									
APPROVED:		DATE:									
T. Nguyen		06-25-1999									
						DO NOT SCALE THE DRAWING					