

Coaxial

50Ω

Maximum Ratings

Operating Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- rugged shielded case
- other standard and custom BHP models available with wide selection of fco


Applications

- lab use
- transmitters/receivers
- radio communications

High Pass Filter Electrical Specifications

STOPBAND (MHz)		fco (MHz) Nom.	PASSBAND (MHz)	VSWR (:1)	
(loss > 40 dB)	(loss > 20 dB)	(loss 3 dB)	(loss <1 dB)	Stopband Typ.	Passband Typ.
DC-445	445-570	710	780-3000	17	2.1


Outline Drawing

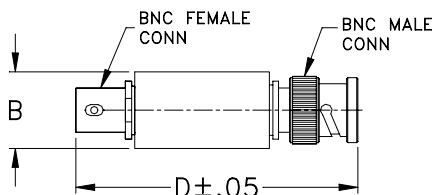


Outline Dimensions (inch)

B	D	wt
.54	2.59	grams
13.72	65.79	40.0

typical frequency response






electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ			
10.00	74.59	6.84	0.07	200.00	0.49
100.00	94.26	7.80	0.06	300.00	0.44
200.00	80.68	1.20	0.07	400.00	0.81
300.00	68.07	0.23	0.10	485.00	0.90
400.00	54.92	0.50	0.14	490.00	0.92
485.00	41.80	0.71	0.21	495.00	0.95
490.00	41.00	0.71	0.21	500.00	0.95
495.00	40.19	0.72	0.22	550.00	1.10
500.00	39.38	0.73	0.22	600.00	1.42
550.00	31.17	0.81	0.32	610.00	1.50
600.00	22.58	0.88	0.41	620.00	1.59
620.00	19.06	0.91	0.51	625.00	1.64
650.00	13.62	0.95	0.77	650.00	2.05
660.00	11.79	0.95	0.91	660.00	2.29
670.00	9.98	0.94	1.13	670.00	2.55
700.00	5.03	0.77	2.65	700.00	3.46
710.00	3.71	0.66	3.62	710.00	3.77
750.00	1.03	0.15	13.50	750.00	3.59
800.00	0.67	0.03	19.87	800.00	2.37
965.00	0.44	0.01	28.39	965.00	1.30
1070.00	0.41	0.00	39.79	1070.00	1.04
1180.00	0.40	0.00	33.07	1180.00	0.87
1290.00	0.40	0.01	25.70	1290.00	0.75
1400.00	0.42	0.02	21.82	1400.00	0.67
1460.00	0.43	0.02	20.66	1460.00	0.63
1570.00	0.46	0.03	19.47	1570.00	0.58
1680.00	0.48	0.03	19.23	1680.00	0.54
1790.00	0.48	0.04	19.63	1790.00	0.50
2000.00	0.49	0.04	21.39	2000.00	0.46
3000.00	0.57	0.03	18.79	3000.00	0.37

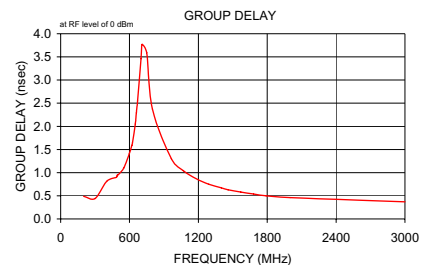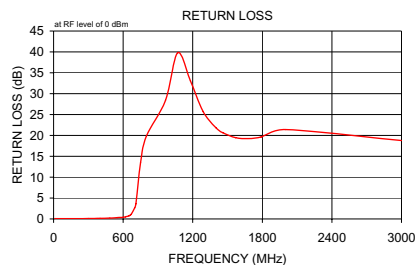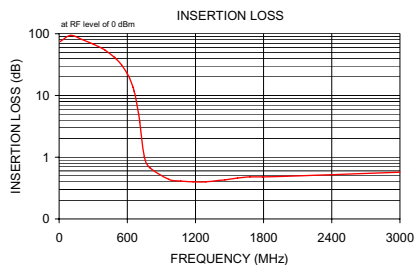

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.C
M113397
BHP-800+
140807



CASE STYLE: FF55

Connectors	Model	Price	Qty.
BNC	BHP-800+	\$36.95 ea.	(1-9)