

REVISIONS				DATE	APPROVED
200	REV	DESCRIPTION	DATE	APPROVED	
-		ORIGINAL RELEASE	2/7/03		

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range: 1.0 to 1.5 GHz
- Gain: 45dB Typ.
- Gain Flatness: +/-0.75dB Max.
- Noise Figure: 4.5dB Typ.
- OP1dB: 13dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 200mA Max.

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

Available Options:


- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

Environmental Ratings:


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
- 55 to +125 Deg. C (Storage)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

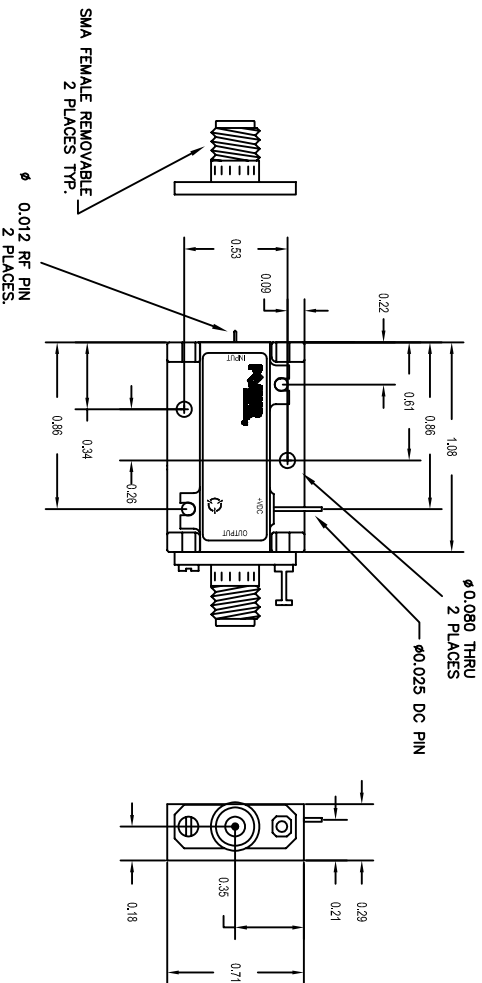

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

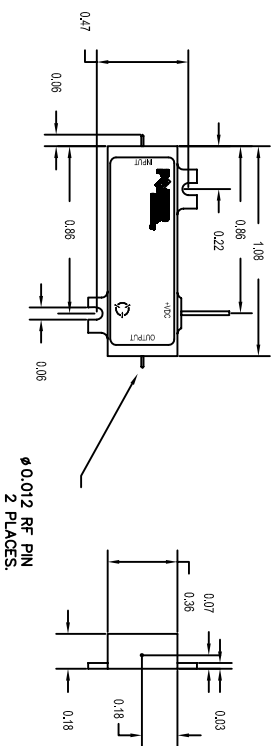

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± ± ±
.XXX ± 0.005
XXX ± 0.005

PART NO.		DATE		DATE	
MATERIAL:		K. Mason		2/27/03	
6061-T6 Aluminum		FINISH:		Gold Plate over Nickel	
DO NOT SCALE DRAWING		N/A		N/A	

5715 Industry Lane, Unit 11
FREDERICK, MARYLAND

PRODUCT FEATURE
PE2-45-1R0RS-4RS-15-12-SFF
B 1LK53
WEB - MODEL A