



High Voltage DC Block on Inner Conductor 50 Ohm SMA Male
to 50 Ohm SMA Female Operating From 10 MHz to 18 GHz

TECHNICAL DATA SHEET

PE8250

High Voltage DC Block on Inner Conductor 50 Ohm SMA Male to 50 Ohm SMA Female Operating From 10 MHz to 18 GHz

Configuration

Design	Inner DC Block
Body Style	Straight
Impedance	50 Ohms
Connector 1	SMA Male
Connector Specification 1	MIL-STD-348
Connector 2	SMA Female
Connector Specification 2	MIL-STD-348

Electrical Specifications

Frequency Range, GHz	0.01 to 18
Impedance, Ohms	50
Maximum VSWR	1.6:1
Maximum Insertion Loss, dB	1.5
Maximum Operating Voltage, Vrms	950

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +100
------------------------	-------------

Size

Length, in [mm]	1.08 [27.43]
Width/Dia., in [mm]	0.36 [9.14]

Connector 1

Type	SMA Male
Hex Size, Inch	5/16

Connector 2

Type	SMA Female
------	------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Voltage DC Block on Inner Conductor 50 Ohm SMA Male to 50 Ohm SMA Female Operating From 10 MHz to 18 GHz PE8250](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



High Voltage DC Block on Inner Conductor 50 Ohm SMA Male
to 50 Ohm SMA Female Operating From 10 MHz to 18 GHz

TECHNICAL DATA SHEET

PE8250

Plotted and Other Data

Notes:

Values at 25 °C, sea level

High Voltage DC Block on Inner Conductor 50 Ohm SMA Male to 50 Ohm SMA Female Operating From 10 MHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Voltage DC Block on Inner Conductor 50 Ohm SMA Male to 50 Ohm SMA Female Operating From 10 MHz to 18 GHz PE8250](http://www.pasternack.com/50-ohm-sma-inner-dc-block-0.1-18-ghz-pe8250-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-inner-dc-block-0.1-18-ghz-pe8250-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8250 CAD Drawing

High Voltage DC Block on Inner Conductor 50 Ohm SMA Male to
50 Ohm SMA Female Operating From 10 MHz to 18 GHz

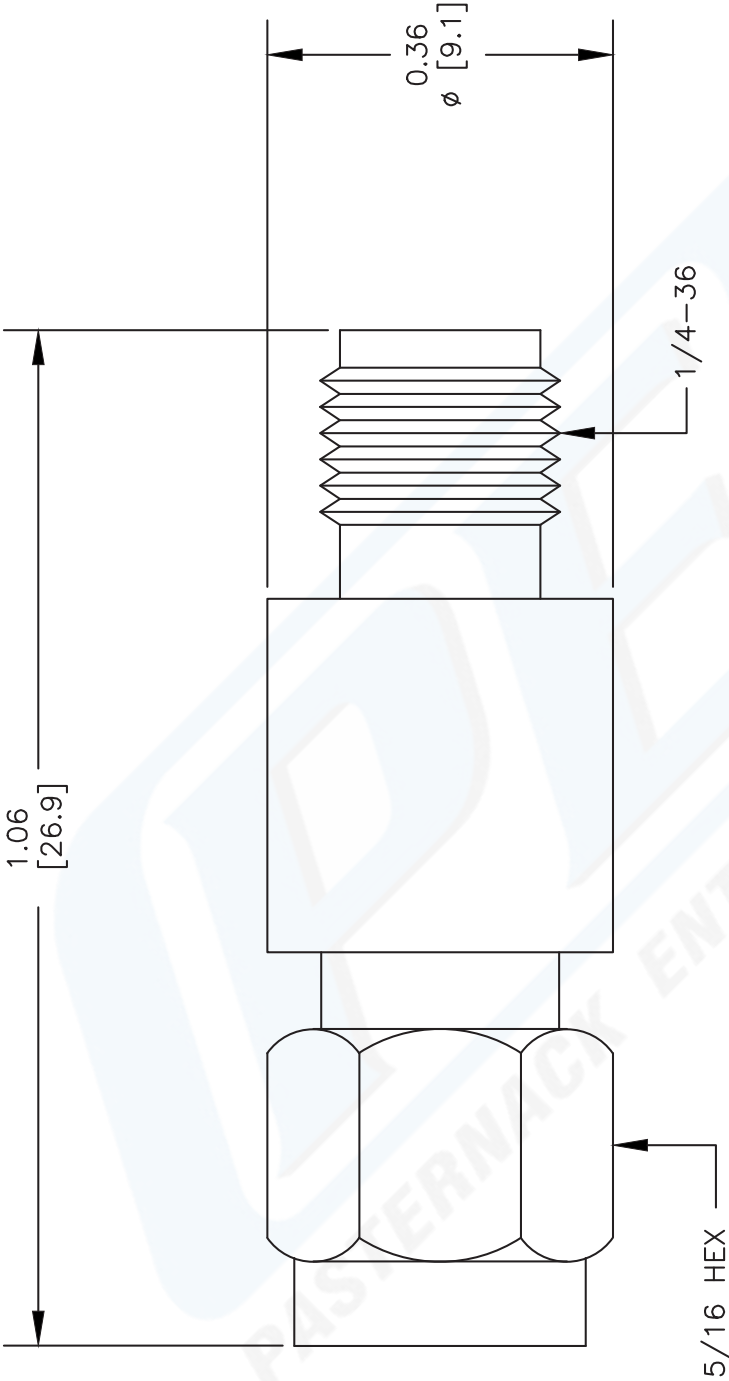

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE8250

REV. B
FSCM NO. 53919

XXXX

SIZE A

SCALE N/A

CAD FILE 102210-B

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com