

## MECHANICAL




CONTACT: BREAK BEFORE MAKE  
ACTUATOR: LATCHING  
SWITCHING SPEED: 20 mSEC MAX

## ELECTRICAL

ACTUATOR VOLTAGE: 12.0 Vdc  
ACTUATOR CURRENT: 0.100 A MAX @ 28.0 Vdc  
POWER HANDLING: 200W CW @ 1.0 GHz

## ENVIRONMENTAL


OPERATING TEMP: -54° C TO +90° C  
SINE VIBRATION: 30 G'S rms  
LIFE: 1,000,000 CYCLES  
RANDOM VIBRATION: 20 G'S rms

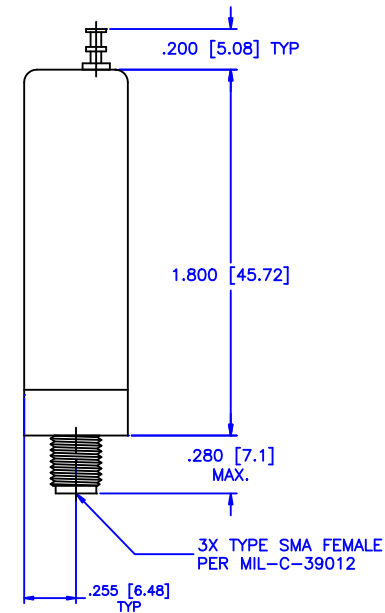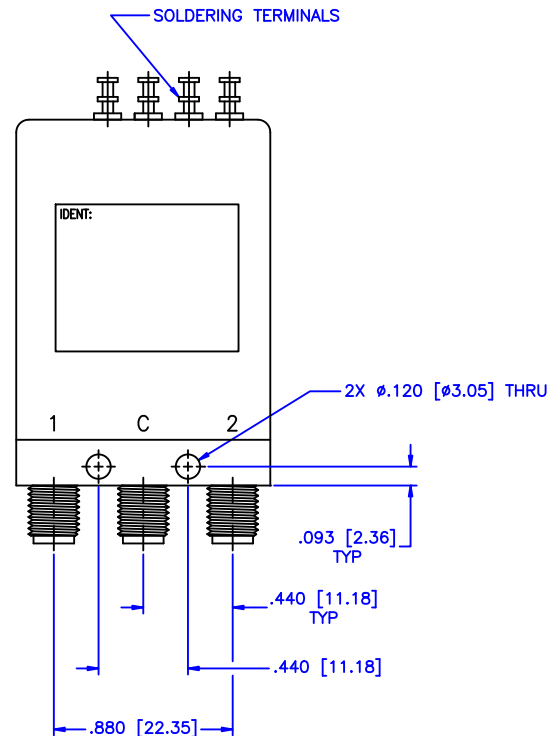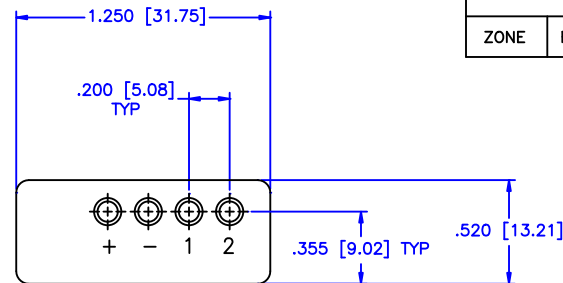

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

## SPECIFICATION:

FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0
VSWR (Max.):	1.20:1	1.25:1
INSERTION LOSS (dB):	0.20	0.25
ISOLATION (dB):	90	80
IMPEDANCE (Ohms):	50	

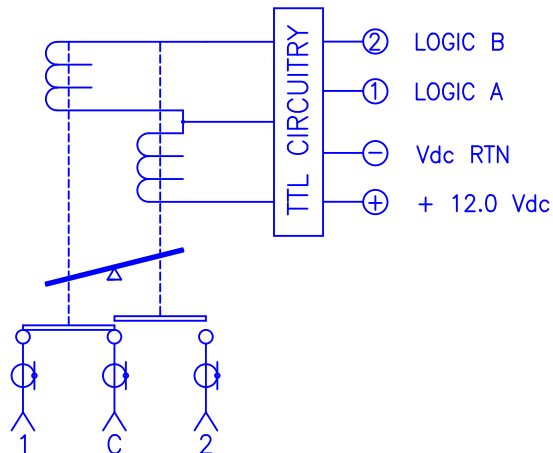

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: ELECTROMECHANICAL SWITCHES		PART NO. K2-3-LL/12		SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 06-04-2008	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: 0D2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 06-04-2008	THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		DWG NO. 82979