




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

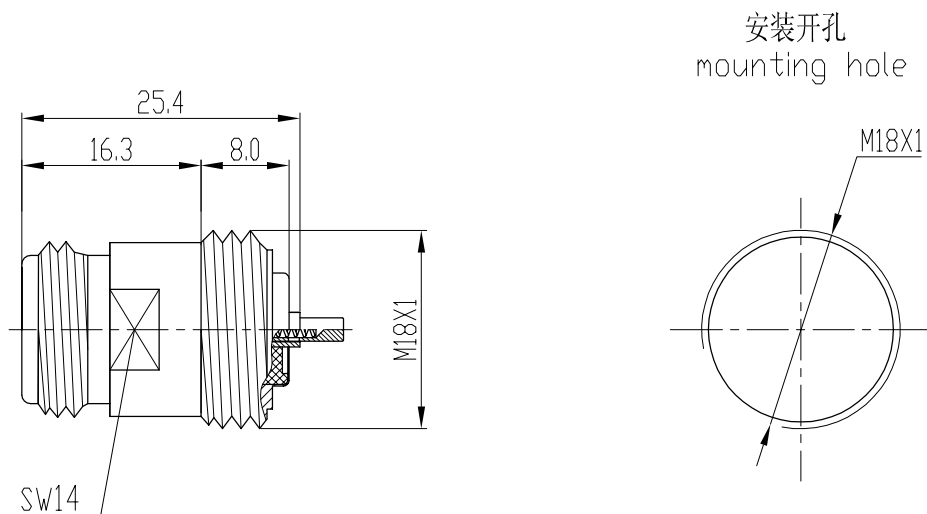

产品型号 type	备注 remark
N-KYD9	
N-KYD9G	body:stainless steel,passivation(不锈钢,钝化)

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~11Ghz
- 3.Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
- 4.Insulation resistance: $\geq 5000\text{ M}\Omega$
5. Insulator withstanding: 1500V
- 6.Durability: 500cycles

主要性能指标:

- 1.特性阻抗: 50Ω
- 2.频率范围: DC~11Ghz
- 3.接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
- 4.绝缘电阻: $\geq 5000\text{ M}\Omega$
- 5.介质耐压: 1500V
- 6.插拔次数: 500次

Application:MIL-C-39012/1E

执行标准:MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Female:phosphor bronze,gold plated
- 2.Body:brass,nickel plated
3. Insulators:PTFE

材料和镀层

- 1.中心接触件:
插孔:锡磷青铜,镀金
- 2.壳体:黄铜,镀镍
- 3.绝缘子:聚四氟乙烯

		SCALE	N-KYD9 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X $\pm$.15 $\pm 1^\circ$.XX $\pm$.05 .XXX $\pm$
		1.5:1		
NAME	DATE			
DRAWN				
CHECKED				
APPROVED			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	