

ADAPTERS, IN-SERIES

1.85mm

DC - 65 GHz

BULKHEAD MOUNT



MODELS: 5292


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC — 65 GHz
 VSWR
 DC — 18 GHz _____ 1.25:1 Max.
 18 — 40 GHz _____ 1.40:1 Max.
 40 — 65 GHz _____ 1.50:1 Max.
 Nominal Impedance _____ 50 Ohms
 Operating Temp Range _____ -65°C to +85°C


Mechanical:

1.85mm Connectors _____ Passivated Stainless Steel
 (Mates with 2.4mm & V* Connectors)
 Conductors _____ Gold Plated Beryllium Copper
 Coupling Nut _____ Passivated Stainless Steel

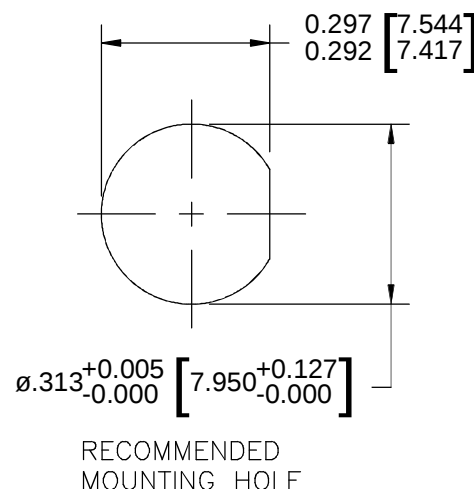

*V is a trademark of Anritsu Corp.

Model Number: **5292**

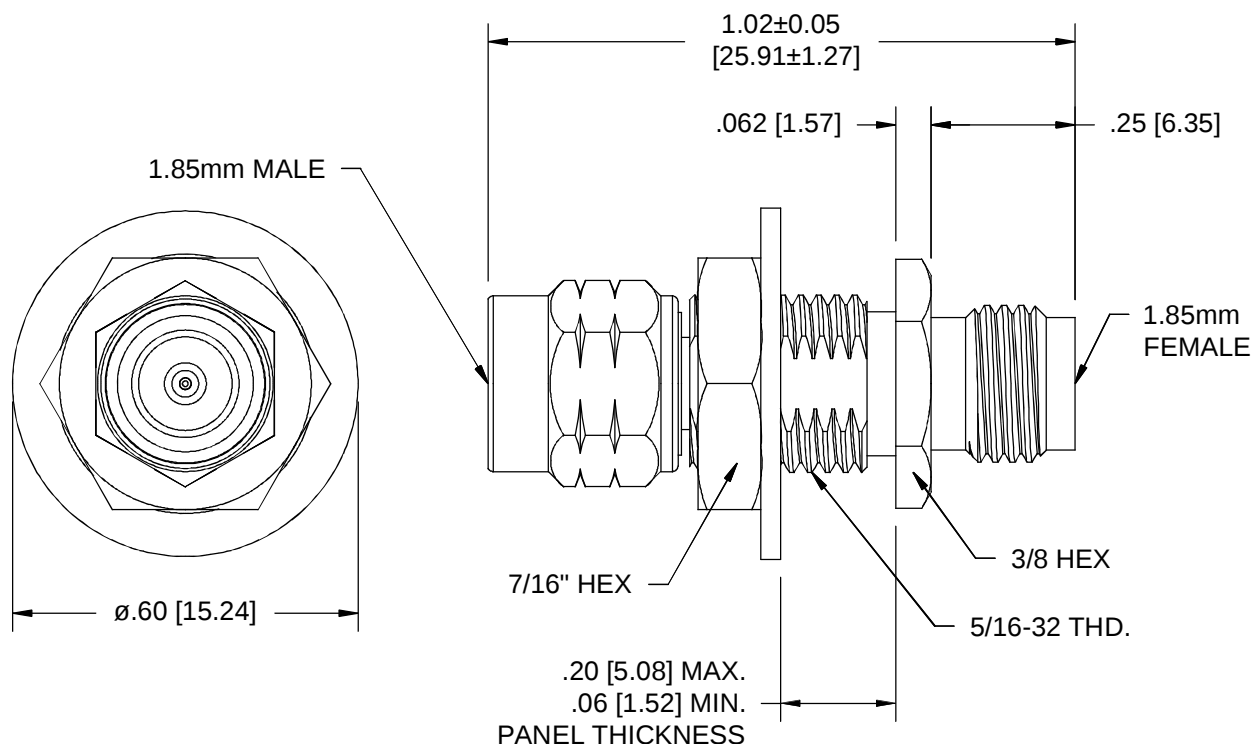

NOTE: COUPLING NUT, RETAINING RING, PANEL NUT
& LOCKWASHER ARE SHIPPED UNASSEMBLED.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.

5292; REV A

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com