

Termination

SMMP, up to 50GHz, 1/2 Watt

SPECIFICATIONS:

Models: TMP500F, TMP400F

Electrical:

Frequency Range _____ DC - 50 GHz
Standard Freq. Values _____ 40 & 50 GHz
VSWR
DC - 40 GHz _____ 1.50:1 Max.
40 - 50 GHz _____ 2.00:1 Max.
Input Power _____ 1/2 Watt Avg.
Impedance _____ 50 Ohms
Operating Temp Range _____ -55°C to +125°C


Mechanical:

SMMP Connectors _____ Gold Plated Beryllium Copper
Mates with MIL-STD-348 & GPPO™ Connectors
Housing _____ Gold Plated Beryllium Copper
Conductors _____ Gold Plated Beryllium Copper

GPPO™ is a Trademark of Corning-Gilbert, Inc.

Model Number: **TMP500F**
SMMP Female Connector
DC - 50 GHz

Model Number: **TMP400F**
SMMP Female Connector
DC - 40 GHz

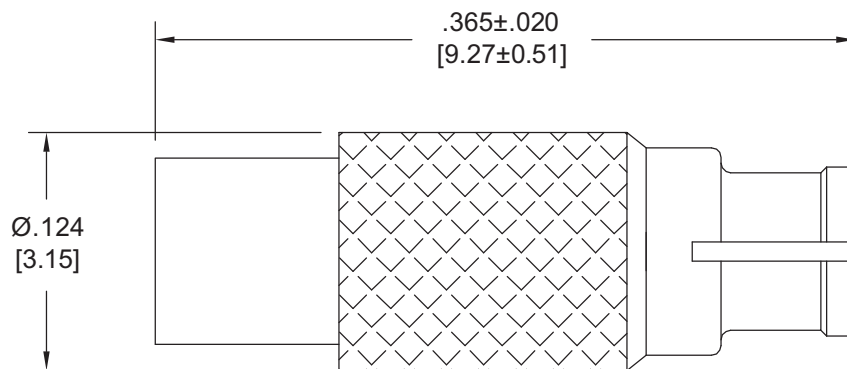

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

TMP500: REV A



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com