
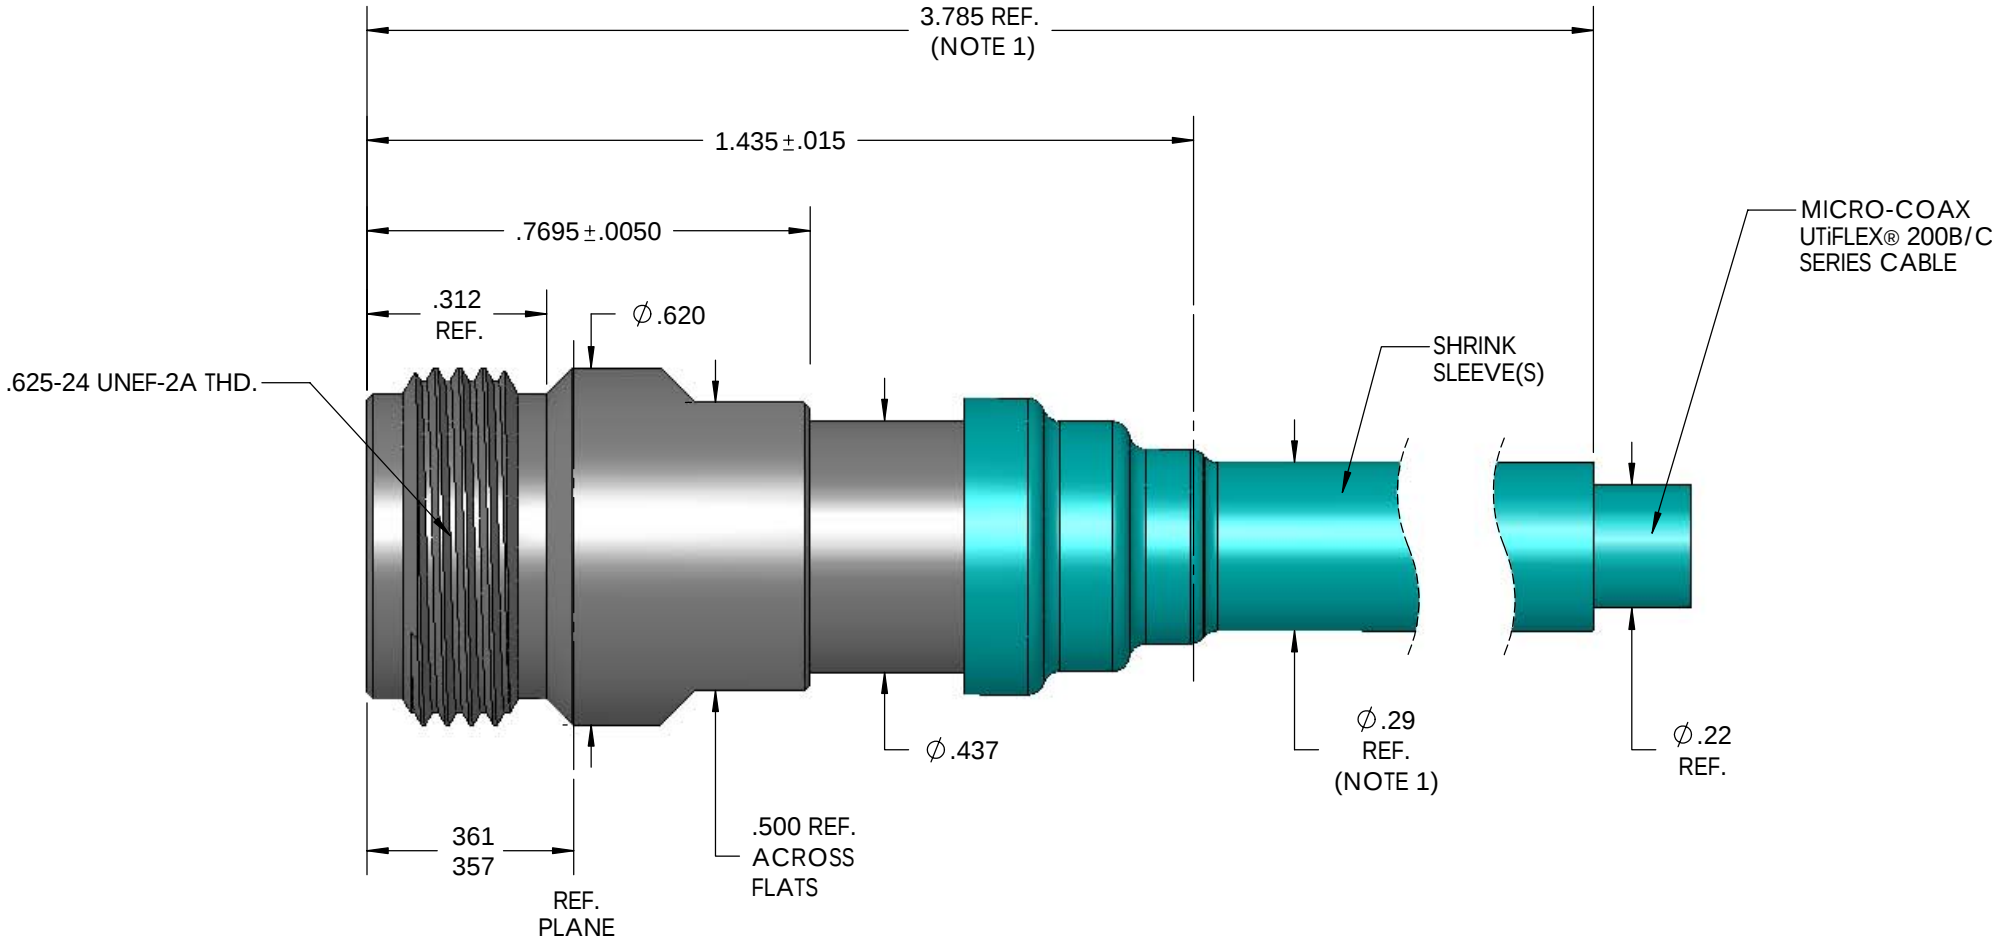


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 304-2
RECOMMENDED MATING TORQUE	20 IN-LBS. NOM.
FORCE TO ENGAGE	6 IN-LBS. MAX.
FORCE TO DISENGAGE	6 IN-LBS. MIN.
CONTACT CAPTIVATION (BOTH DIRECTIONS)	6 LBS. MIN.
DURABILITY	500 CYCLES MIN.
CABLE RETENTION	20 LBS. MIN.
MASS	28 GRAMS NOM.
CENTER CONTACT INSERTION FORCE (INTERFACE)	2 LBS. MAX.
CENTER CONTACT WITHDRAWAL FORCE (INTERFACE)	2 OZ. MIN.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms. NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
INSERTION LOSS	0.045√ F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1800 Vrms MIN.
INSULATION RESISTANCE	5000 Mega Ohms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB
CORONA	450 Vrms. MIN. @ 70,000 FEET
RF HIGH POTENTIAL	1200 Vrms. MIN.
CONTACT RESISTANCE (INNER)	1.0 Milli Ohms MAX.
CONTACT RESISTANCE (OUTER)	0.2 Milli Ohms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65°C TO +165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIAL AND FINISH	
CONTACT, CONTACT FLEA	BERYLLIUM COPPER, UNS NO. C17300, PER ASTM-B-196 GOLD PLATE PER MIL-G-45204, 50 MICROINCH MIN., OVER NICKEL PLATE PER QQ-N-290, 50 MICROINCHES THK. MIN.
BODY, SLEEVE, CLAMP NUT	STEEL, CORROSION RESISTANT, CONDITION A, NON-MAGNETIC PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
INSULATOR, DIELECTRIC STOP	POLYPHENYLENE SULFIDE (PPS) PER ASTM-D-6358
CONTACT RING	BRASS, TEMPER H02, PER ASTM-B-16 UNS NO. C36000 GOLD PLATE PER MIL-G-45204, 50 MICROINCHES MIN., OVER NICKEL PLATE PER QQ-N-290, 50 MICROINCHES MIN.
APPLICATION	
CABLE(S)	UTIFLEX 200B/ C SERIES
INSTALLATION	PER CONFIGUATOR

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	02/07/05	SRS	RS

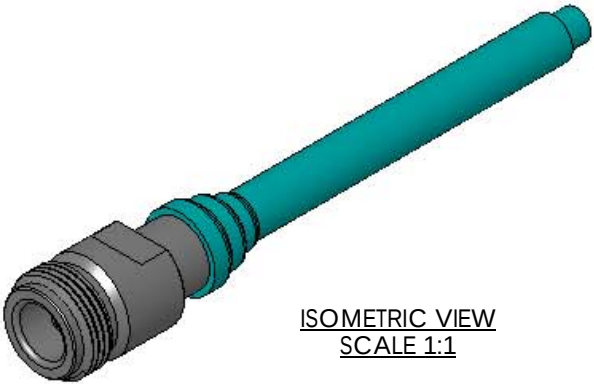

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		MICRO-COAX[®] <i>Leading the way in transmission line solutions.</i> Copyright Micro-Coax, Inc.					
		DWN.	LXT	9/21/04							
		CHKD.									
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		N JACK, PRECISION, 200B/C SERIES									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO. 64639	SIZE B	SCALE 1:1	SHEET NO. 1 OF 1	DRAWING NO. SD904127	REV A		
.XXX	± .005										
.XXXX	± .0010										
ANGLES	± 2°										