



SMP Male Connector Solder Attachment Thru Hole
PCB, .100 inch x .031 inch Hole Spacing

TECHNICAL DATA SHEET

PE44348

SMP Male Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing

Configuration

Connector	SMP Male
Connector Specification	MIL-STD-348A
Connector Interface Type	Thru Hole
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.3:1
Maximum Operating Voltage, Volts	335

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	0.291 [7.39]
Width/Dia., in [mm]	0.187 [4.75]
Weight, lbs [g]	0.002 [0.91]

Connector

Type	SMP Male
Contact Material and Plating	Brass, Gold
Contact Plating Specification	30µ in. minimum
Body Material and Plating	Brass, Gold
Body Plating Specification	3µ in. minimum
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
REACH Compliant	06/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Male Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing PE44348](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMP Male Connector Solder Attachment Thru Hole
PCB, .100 inch x .031 inch Hole Spacing

TECHNICAL DATA SHEET

PE44348

Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMP Male Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Male Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing PE44348](http://www.pasternack.com/smp-male-standard-thru-hole-pcb-connector-pe44348-p.aspx)

URL: <http://www.pasternack.com/smp-male-standard-thru-hole-pcb-connector-pe44348-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44348 CAD Drawing

SMP Male Connector Solder Attachment Thru Hole
PCB, .100 inch x .031 inch Hole Spacing

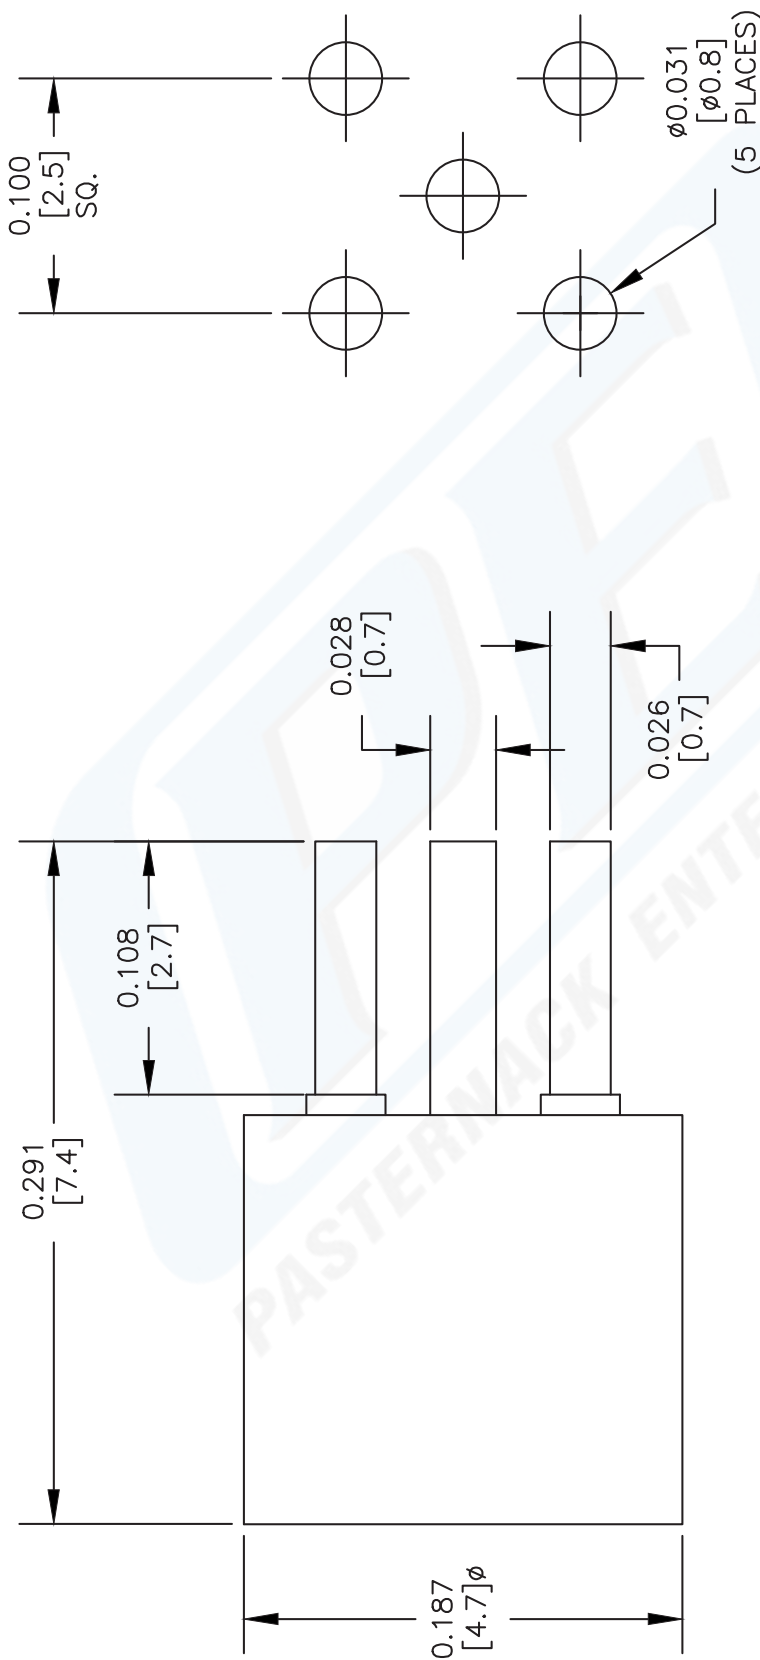

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE44348

FSCM NO. 53919

CAD FILE 072903
SCALE N/A
SIZE A
XXXX

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com