

TUNEABLE FILTER .5-1GHZ N



SF50100

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 500-100 MHz
IMPEDANCE: 50 OHMS
VSWR: 1.50:1 MAX
INSERTION LOSS: 0.6 DB
INPUT POWER: 5W CW

ROHS COMPLIANT

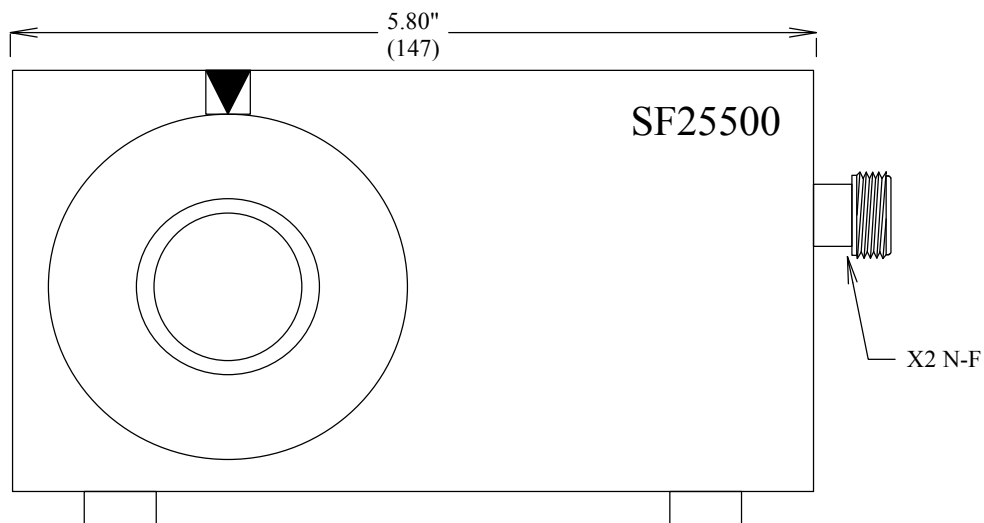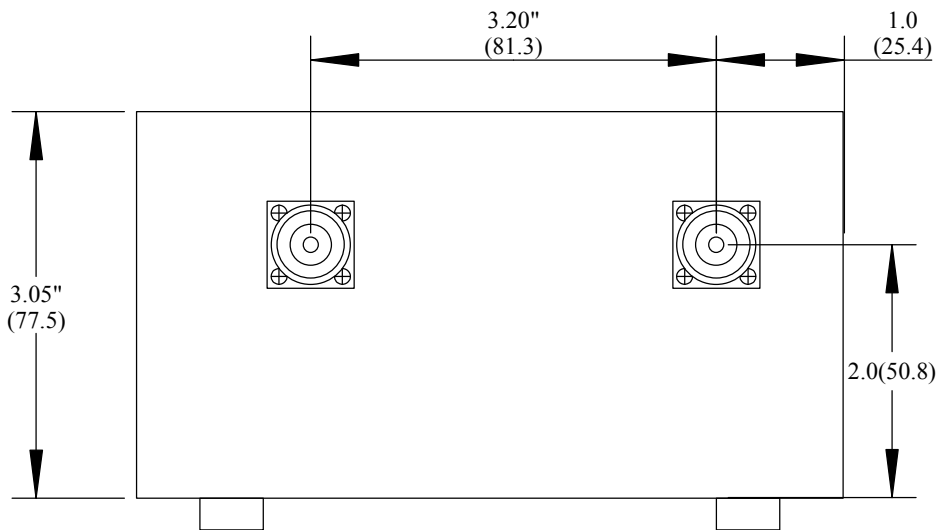

MEASUREMENTS BELOW ARE TYPICAL

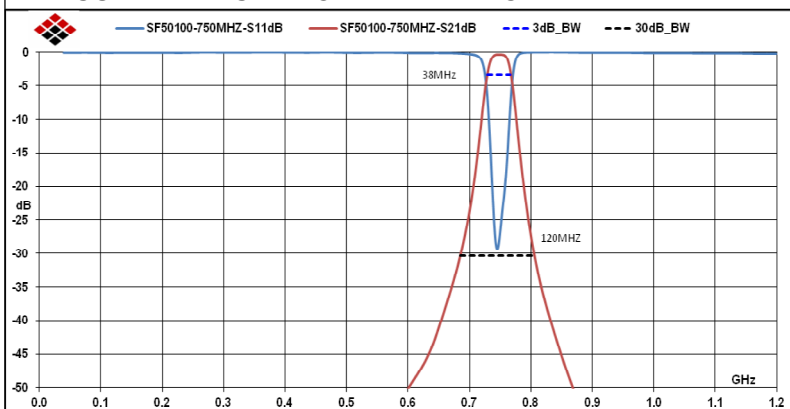

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TUNEABLE FILTER .5-1GHZ N

SIZE

A

CAGE CODE

3FKR5

DWG NO

SF50100

REV

--

SCALE

SHEET

ALL DIMENSIONS IN inches(MM) Typical