




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

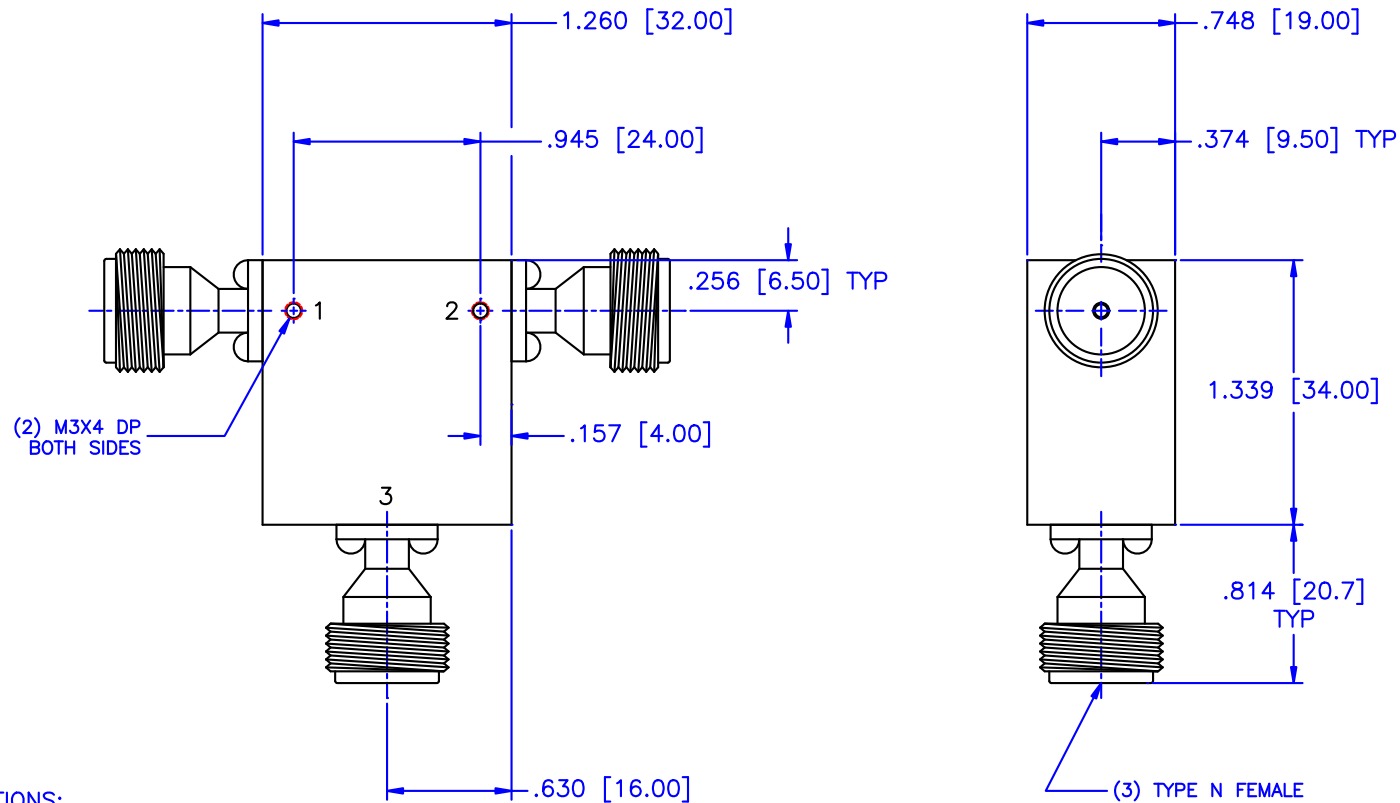

SPECIFICATIONS:

Frequency Range: 2.6–5.2 GHz
Isolation: 18dB Min.
Insertion loss: 0.50dB Max.
VSWR: 1.35:1 Max.
Operating Temperature: 0°C to +55°C
Circulator Power:
Average: 25 Watts
Peak: 250 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR	
DRAWN: Paiboon Luekhamhan		DATE: 04-12-2000		PART NO. CS-13/NF	
APPROVED: T. Nguyen		DATE: 04-12-2000		CAGE CODE: OD2L5	
		THIRD ANGLE PROJECTION 		SIZE: A DO NOT SCALE THE DRAWING	
				REV: N/A DWG NO. 83918	

