


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

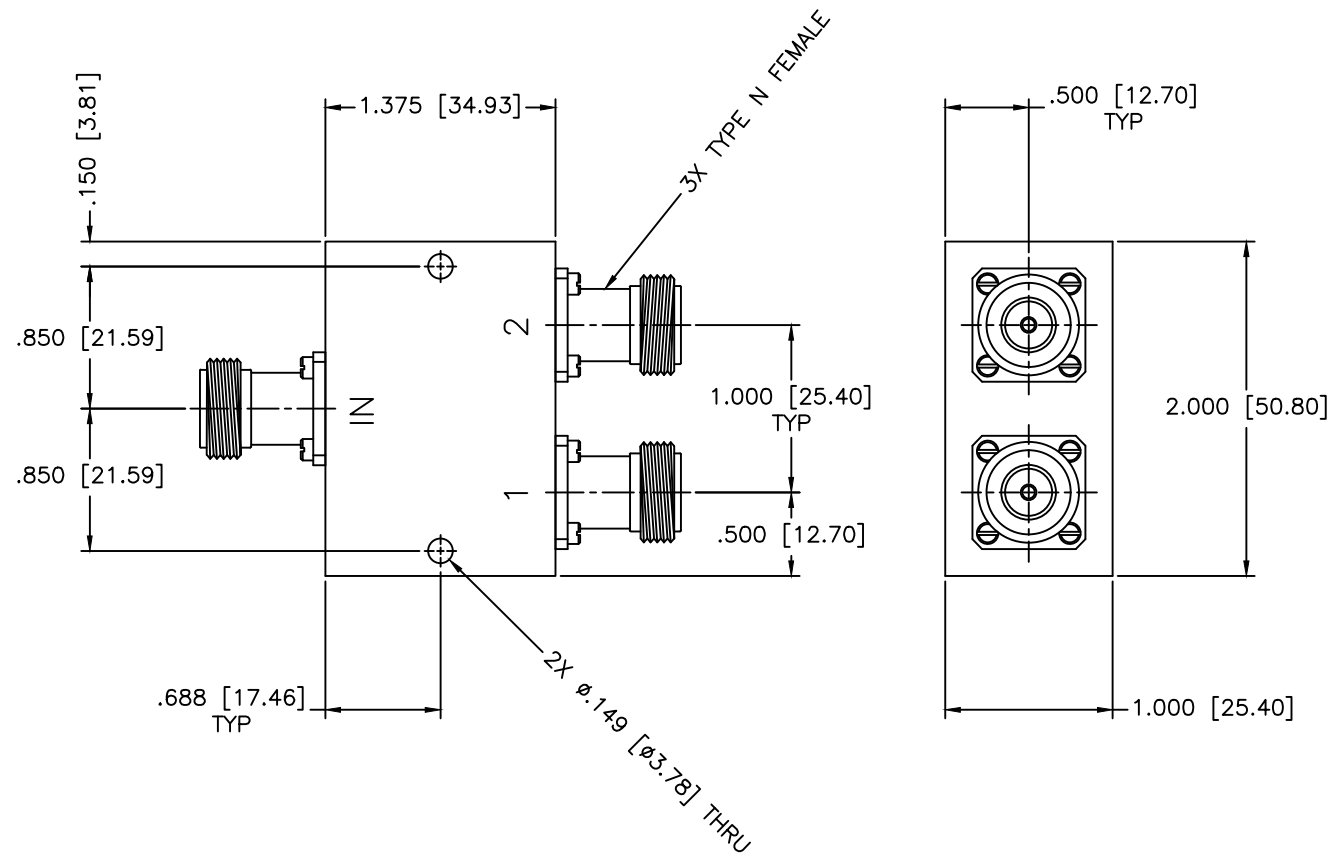

SPECIFICATIONS

Frequency Range: 3.625–4.25 GHz
 Insertion Loss: 0.3dB Max.
 Isolation: 22dB Min.
 VSWR In/Out: 1.25:1/1.20:1 Max.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 2 Deg Max.
 Power: 30 Watts
 Storage Temperature: -65°C to $+125^{\circ}\text{C}$
 Operating Temperature: -55°C to $+95^{\circ}\text{C}$

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE:			
DRAWN: Pailoon Luekhamhan DATE: 06-28-1999		2-WAY POWER DIVIDERS			
APPROVED: T. Nguyen DATE: 06-28-1999		PART NO. PS2-19/NF			
THIRD ANGLE PROJECTION		CAGE CODE:	SIZE:	REV:	DWG. NO.
		OD2L5	N/A	N/A	80073
DO NOT SCALE THE DRAWING					