


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

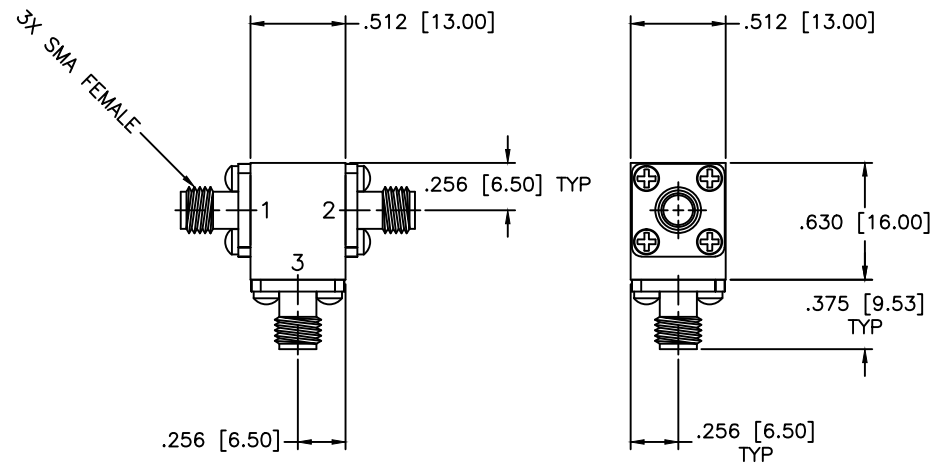

SPECIFICATIONS

Frequency Range: 17.3–23.6 GHz
 Isolation: 19dB Min.
 Insertion loss: 0.60dB Max.
 VSWR: 1.25:1 Max.
 Circulator Power: 25W Avg, 250W Peak.
 Operating Temperature: –54°C to +85°C

MATERIAL: 		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 05-18-2010		DRAWING TITLE: COAXIAL CIRCULATOR	
APPROVED: T. Nguyen		DATE: 05-18-2010		PART NO.: CS-82	
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5		SIZE: A	
REV: N/A		DO NOT SCALE THE DRAWING		DWG NO.: 84807	