


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

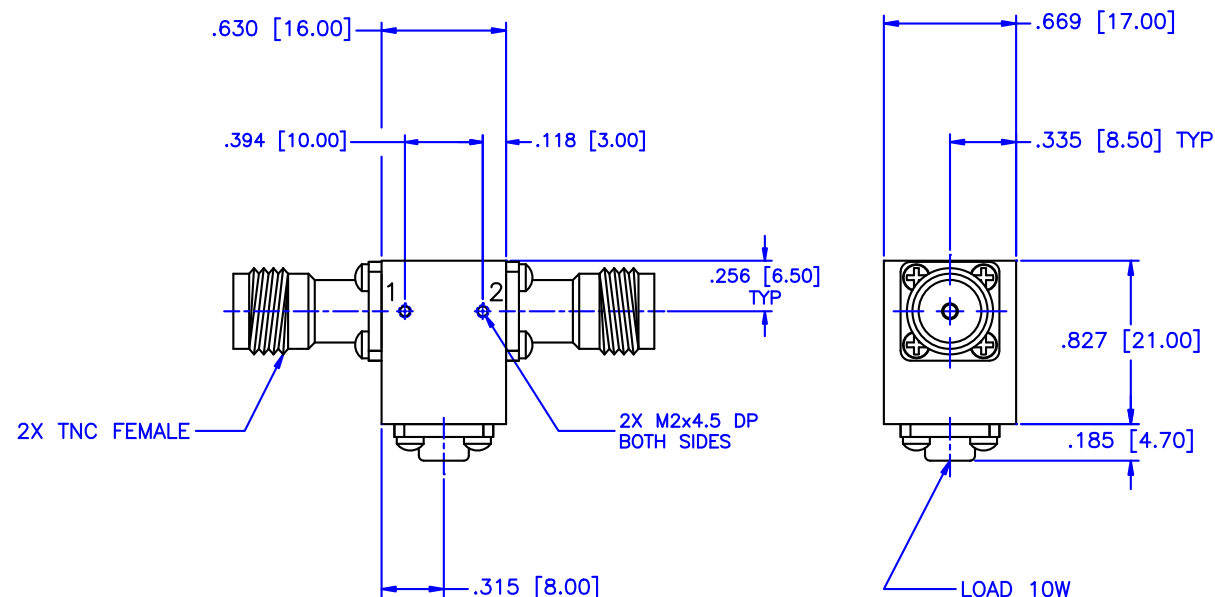

SPECIFICATIONS:

Frequency Range: 10–14 GHz
 Isolation: 23dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.25:1 Max.
 Operating Temperature: –54°C to +85°C
 Reverse Power: 10 Watts

MATERIAL: 		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 10-21-2010		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01$ $\pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR	
				PART NO. IS-132/TF	
APPROVED: T. Nguyen DATE: 10-21-2010		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: A
				REV: N/A	DWG NO. 85087
DO NOT SCALE THE DRAWING					