
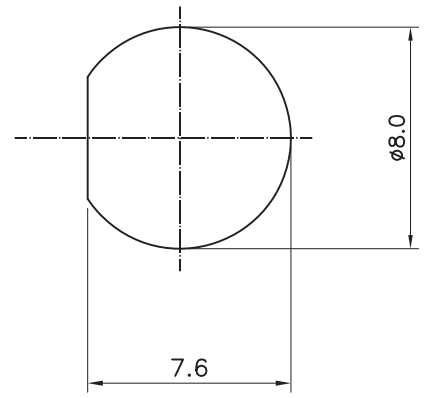


SPECIFICATIONS;
 IMPEDANCE : 50 Ohms
 Frequency Range :DC~18GHz
 Working Voltage : 1000 VRMS
 Insulation Resistance : 5000M ohms min.
 Temperture Range : -55~155°C
 VSWR : DC~18 GHz : ≤ 1.20

No.	Revision	Date	Name
1	PN Change from 1S-804-02	26/06/2013	B.G.YUN
2			

RoHS Compliant

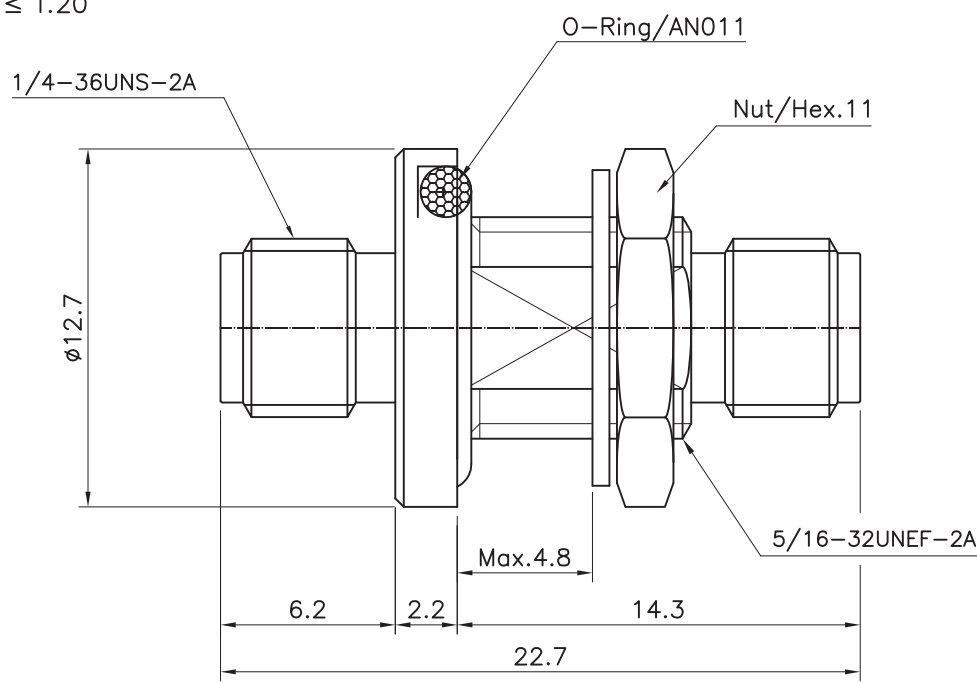

MOUNT HOLES

SMA Bulkhed JACK to JACK
 ADAPTOR with SEAL(IP67)

Connector parts	Materials	Finish
Body,Nut,Washer	Brass	Gold plated
Center contact	Beryllium copper	Gold plated
Insulator	PTFE	-
O-Ring	Silicone rubber	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	20-804-02	NAME	SMA-B/H-JJ-ADAPTOR		APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05 ANGLES ±1°		
SCALE	UNIT	mm		DESIGNED	S.J.LEE
DWG NO.	SMA-804-004		DATE 23/AUG/2007		