



BL2450K08051T BALUN SPECIFICATION

Rev A


PRODUCT FEATURES

1. Surface mount ceramic balun with a small size of 2.00 x 1.25 x 0.95 mm (0805 size).
2. Low insertion loss and inband amplitude/phase imbalance.
3. Highly stable under temperature and humidity changes.
4. Superior performance in a compact size, RoHS compliant.

RF CHARACTERISTICS


P/N BL2450K08051T	Specification
Working Frequency Range	2450 $\pm$ 50 MHz
Insertion Loss (dB)	1.2 max
Unbalanced Impedance (Ω)	50
Balanced Impedance (Ω)	50
Return Loss (dB) Min.	10
Amplitude Balance (dB)	2.0
Phase Balance (degree)	180 $\pm$ 10 $^\circ$
Operation Temperature Range	-40 $^\circ$ C to +85 $^\circ$ C

PHYSICAL DIMENSIONS



	Dimension (mm)
L	2.00 $\pm$ 0.15
W	1.25 $\pm$ 0.15
T	0.95 $\pm$ 0.10
A	0.20 $\pm$ 0.20
B	0.30 $\pm$ 0.20
C	0.35 $\pm$ 0.20
D	0.65 $\pm$ 0.20
E	0.25 $\pm$ 0.15

TERMINAL CONFIGURATION



PIN	Definition	PIN	Definition
P1	Unbalanced Port	P4	Balanced Port
P2	DC or GND	P5	GND
P3	Balanced Port	P6	NC

PCB DESIGN/LAYOUT CONSIDERATION


Figure	Symbol	Dimension (mm)
	A	1.00 $\pm$ 0.10
	B	0.35 $\pm$ 0.10
	C	0.30 $\pm$ 0.10
	D	0.65 $\pm$ 0.10
	E	0.80 $\pm$ 0.10
Trace impedance must be 50 Ω . The trace width is a dependent of PCB material and its thickness.		



TEST DATA

Typical RF Performance

(1). Amplitude balance

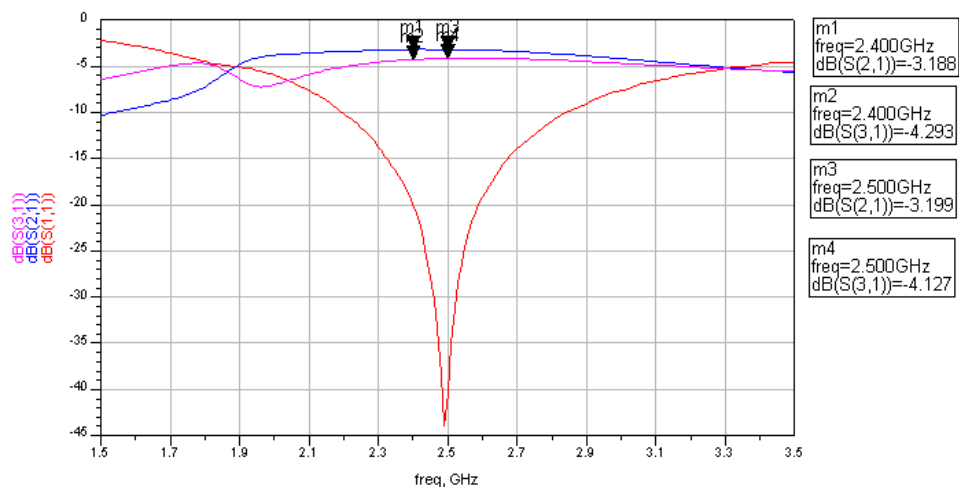

(2). Phase balance

