


T-602S01 2 GHz to 4 GHz

Broadband Coaxial ISOLATORS & CIRCULATORS

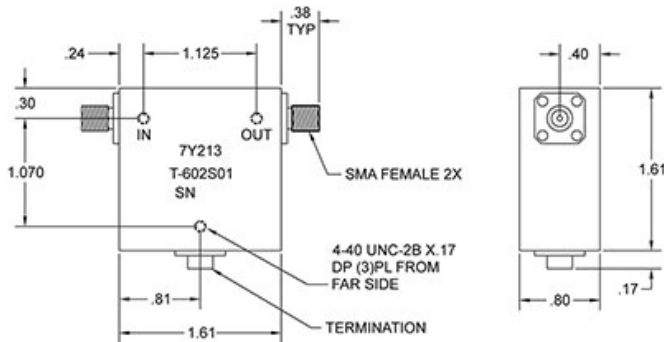

Specifications

RF Frequency	2 GHz to 4 GHz
Isolation	20 dB (min)
Insertion Loss	0.5 dB (max)
VSWR	1.25:1
Peak Power	100 Watts (max)
Average Power	20 Watts (max)
Package Size	1.61 x 1.61 x 0.80"

Environmental Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Manteca, CAL | 1-209-825-3977 | rf.mrcy.com
Specifications subject to change without notice

