


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

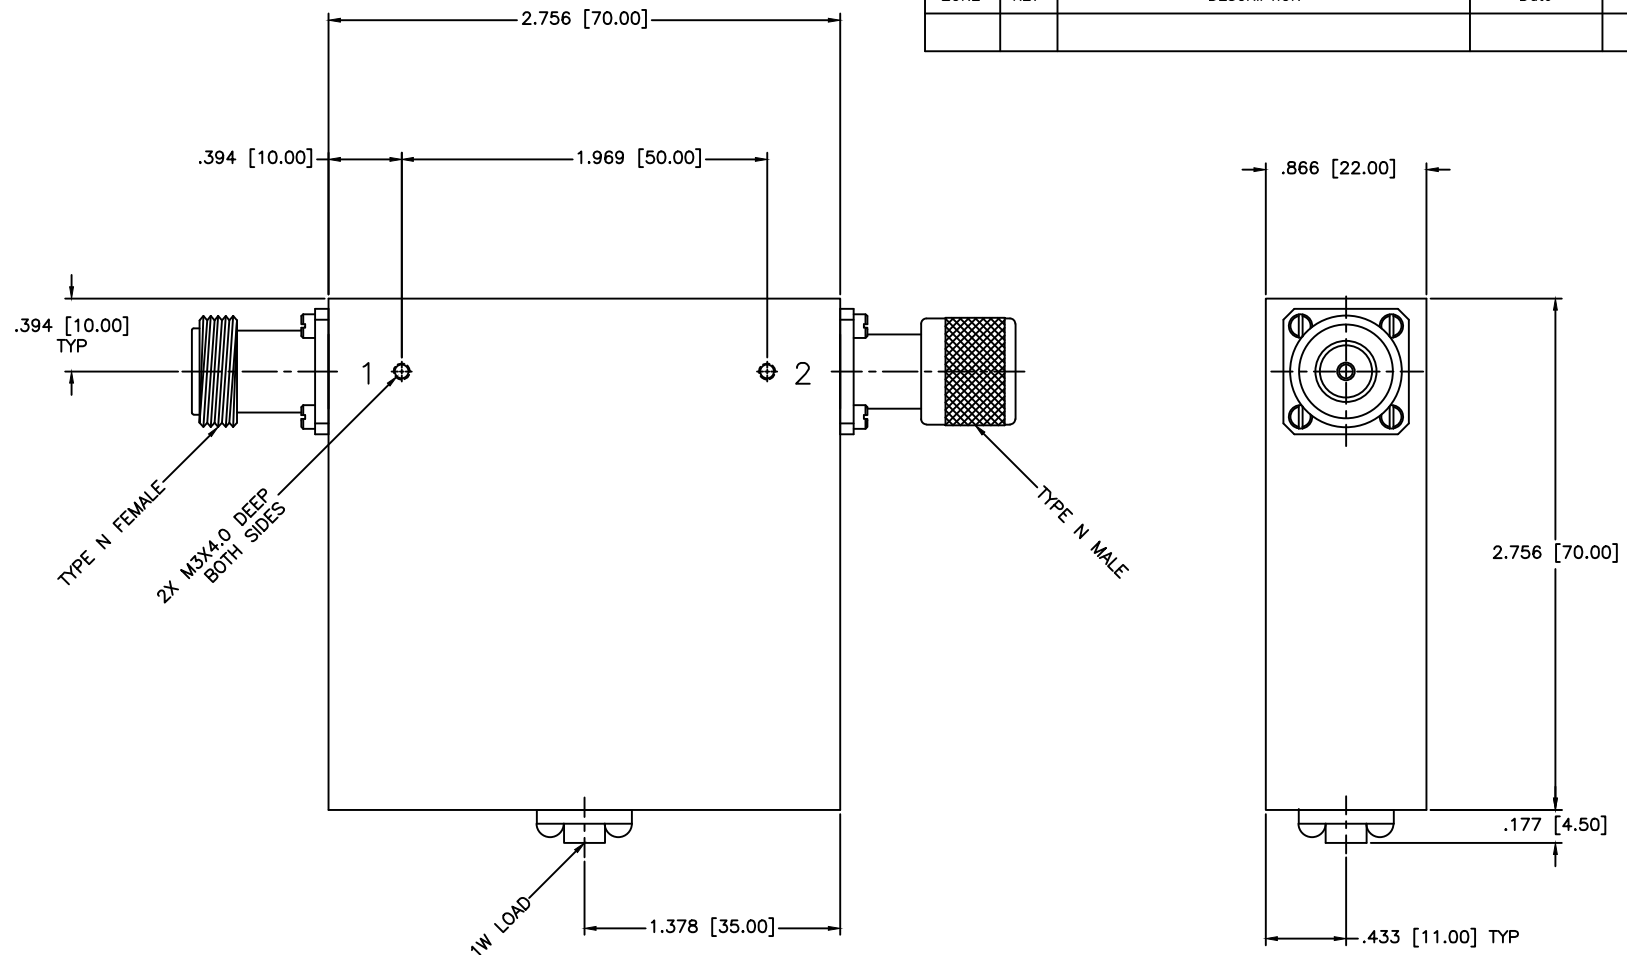

SPECIFICATIONS

Frequency Range: 0.98–2.05 GHz
 Temperature Range: +10° to +40°C
 Isolation: 17dB Min.
 Insertion loss: 0.6dB Max.
 VSWR: 1.35:1 Max.
 Power AVG: 1 Watt

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 01-04-2008		DRAWING TITLE: 1WATT COAXIAL ISOLATOR	
APPROVED: T. Nguyen		DATE: 01-04-2008		PART NO.: IS-2-1/NMO	
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5		SIZE: N/A DO NOT SCALE THE DRAWING	REV: N/A DWG NO.: 84082