

2 Way-90° 50Ω 1200 to 2200 MHz



CASE STYLE: GF981

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	17.5W* max.

* Derate linearly to 3.5W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	2
PORT 1 (0°)	8
PORT 2 (+90°)	4
GROUND	1,3,5,7
50 OHM TERM EXTERNAL	6

Outline Drawing

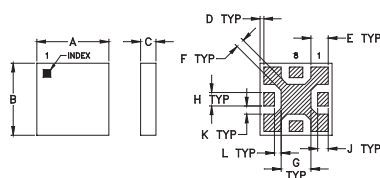


PCB Land Pattern



Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	
.150	.150	.032	.008	.036	.018	.062	.028	.022	
3.81	3.81	0.81	0.20	0.91	0.46	1.57	0.71	0.56	
K	L	M	N	P	Q	R	S	T	wt
.017	.014	.036	.018	.062	.028	.037	.017	.014	grams
0.43	0.36	0.91	0.46	1.57	0.71	0.94	0.43	0.36	0.05

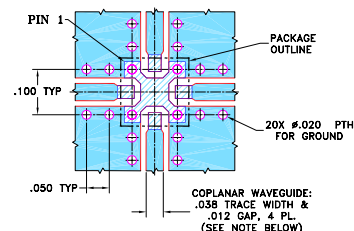Demo Board MCL P/N: TB-302+
Suggested PCB Layout (PL-128)

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- high isolation, 25 dB typ.
- LTCC construction
- excellent temperature stability
- small size, 0.15" X 0.15"
- aqueous washable
- protected by U.S. Patent 7,030,713

Applications

- WCDMA • defense
- PCS
- DECT
- PHS
- radar




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)	
f_L - f_U	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.
1200-2200								
1200-1400	32	24	0.4	0.6	1	3	0.4	1.0
1400-1800	35	20	0.4	0.7	1	3	0.5	0.85
1800-2200	23	16	0.6	0.9	1	5	0.5	0.9

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1200.00	3.06	3.64	0.58	30.83	90.74	1.03	1.16	1.19
1300.00	3.28	3.43	0.16	33.49	91.05	1.01	1.18	1.20
1350.00	3.37	3.35	0.03	34.64	91.20	1.02	1.19	1.20
1400.00	3.47	3.27	0.20	35.21	91.33	1.04	1.19	1.20
1500.00	3.63	3.16	0.47	33.11	91.51	1.08	1.21	1.21
1550.00	3.70	3.12	0.58	31.38	91.57	1.10	1.22	1.21
1600.00	3.76	3.09	0.67	29.70	91.60	1.12	1.24	1.22
1700.00	3.84	3.07	0.77	27.04	91.58	1.15	1.27	1.23
1750.00	3.87	3.08	0.79	25.86	91.55	1.17	1.28	1.24
1800.00	3.89	3.10	0.79	24.69	91.48	1.18	1.29	1.25
1900.00	3.89	3.18	0.71	22.58	91.25	1.23	1.31	1.28
1950.00	3.87	3.24	0.63	21.66	91.11	1.25	1.32	1.30
2000.00	3.83	3.32	0.52	20.85	90.94	1.27	1.33	1.32
2100.00	3.73	3.52	0.21	19.49	90.53	1.31	1.35	1.35
2200.00	3.56	3.78	0.22	18.38	90.13	1.33	1.37	1.40

1. Total Loss = Insertion Loss + 3dB splitter loss.

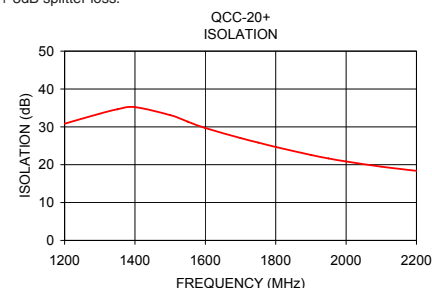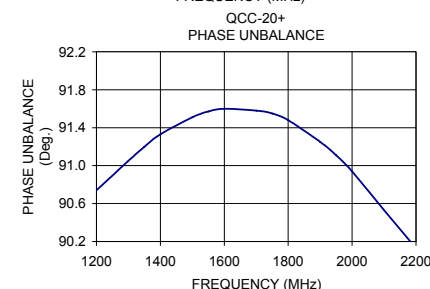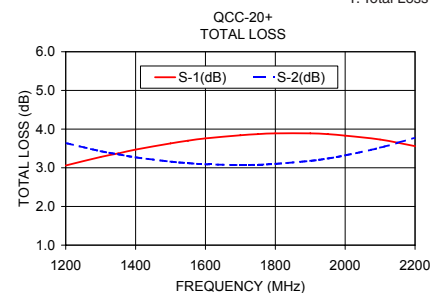

electrical schematic

