





ULTRA WIDE BAND 50W DIRECTIONAL COUPLER 0.5-2.5GHz

- Ultra wide band performance 0.5G-2.5GHz
- power operation up to 50W CW
- Compact size and low loss.
- Low passive inter-modulation product.
- Customized unit available.
- Applicable for base station, repeaters of CMDA cellular network




Electrical Specifications			
Frequency	0.5-2.5GHz	Power	50W CW
Amplitude Balance	$\pm 0.7\text{dB}$	Insertion Loss / VSWR	0.5dB 1.2 : 1
Directivity	20dB	Coupling	$10 \pm 1.0\text{dB}$
Environmental Specifications			
Oper.Temp.	-55°C to 85°C base plate	Storage Temp.	-55°C to 100°C base plate
Altitude	45,000 ft		
Mechanical Specifications			
Humidity	95% relative humidity, 65°C 96Hour	Mechanical shock	30G, 11mSec half sin wave, 3 axis both directions
Vibration:	14.2g RMS (15-2000Hz) functional	Connectors:	SMA-Female Brass, Nickel Plate
	16.2g RMS (15-2000Hz) endurance, 1 hour/axis		Beryllium Copper, Gold Plate PIN

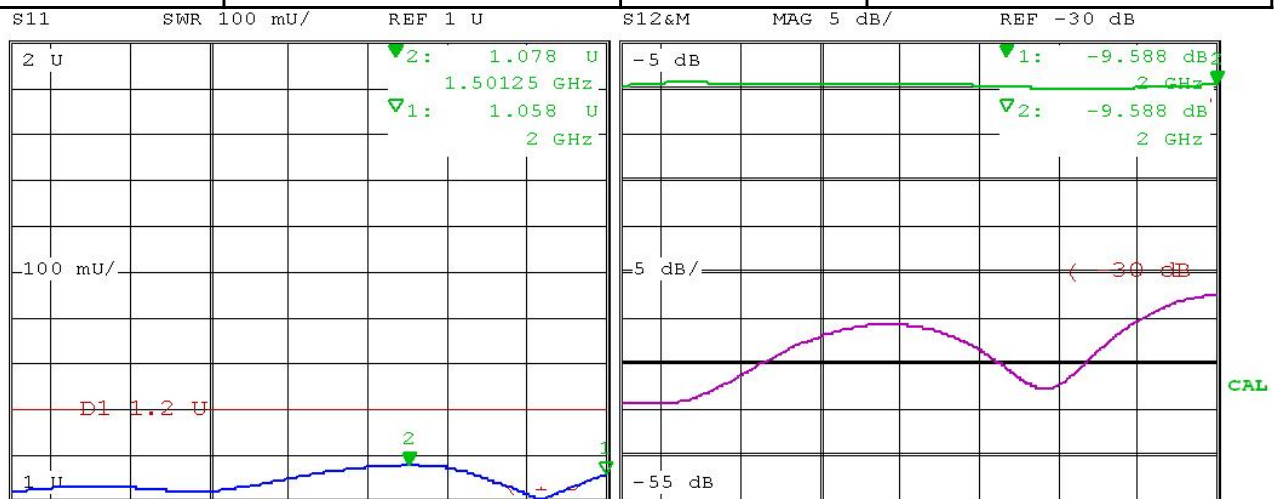

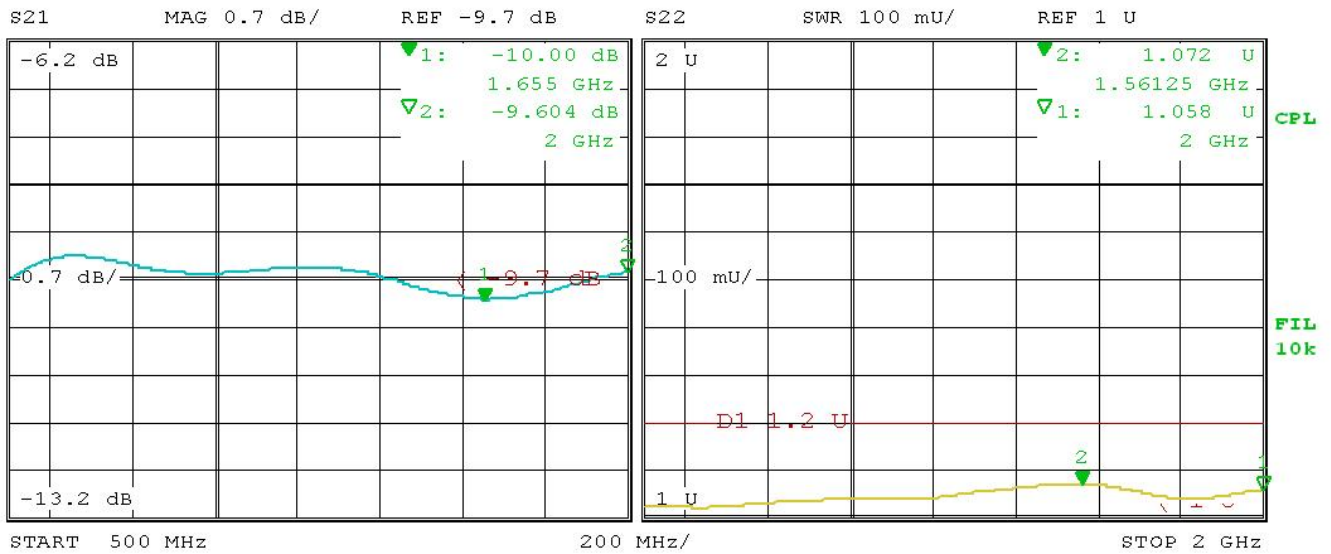

DRAWING:

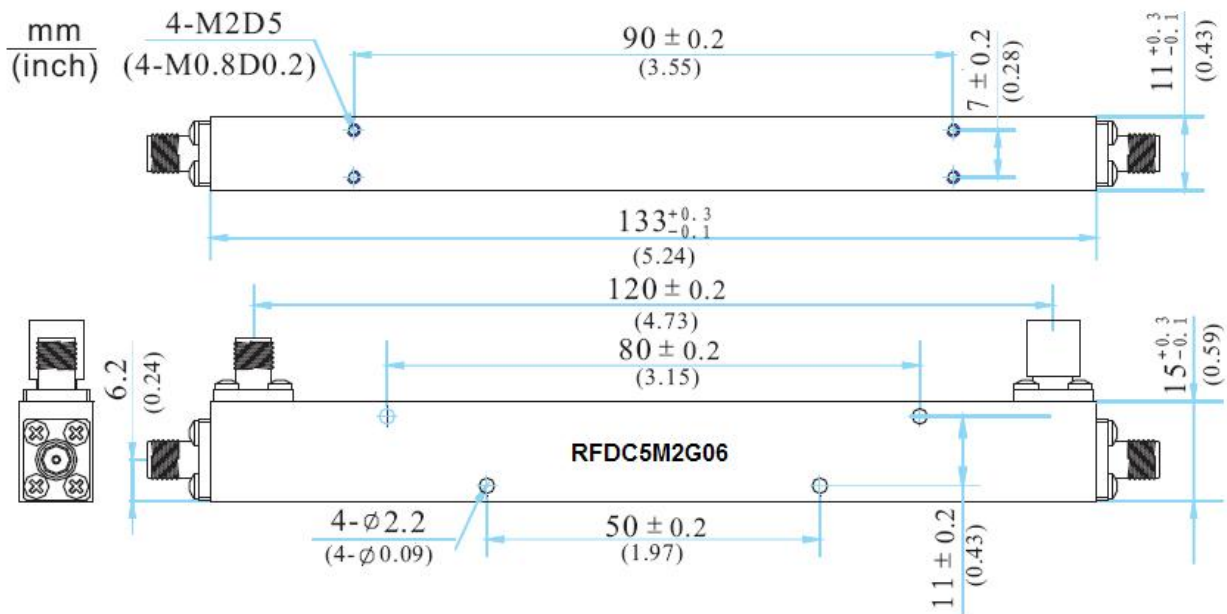

ULTRA WIDE BAND 50W DIRECTIONAL COUPLER 0.5GHz-2.5GHz