

ADAPTER, BETWEEN SERIES TYPE N / SMA

DC - 18 GHz BULKHEAD MOUNT



MODELS: 5206

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 18.0 GHz

VSWR

DC - 4 GHz _____ 1.10:1 Max.

4 - 12.4 GHz _____ 1.20:1 Max.

12.4 - 18 GHz _____ 1.30:1 Max.

Impedance _____ 50 Ohms

Operating Temp Range _____ -65°C to +125°C

Mechanical:


Connectors _____ Passivated Stainless Steel

(Mates IAW MIL-STD-348)

Conductors _____ Gold Plated Beryllium Copper

Nut & Washer _____ Passivated Stainless Steel


O-Ring _____ Silicone Rubber

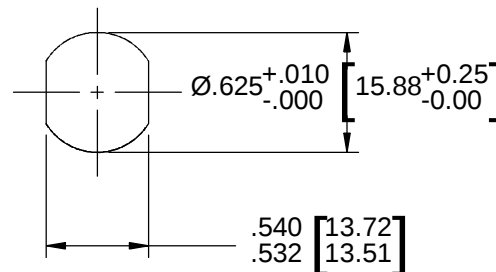

Recommended Panel
Configuration

Model Number: **5206**

Type N Male / SMA Female

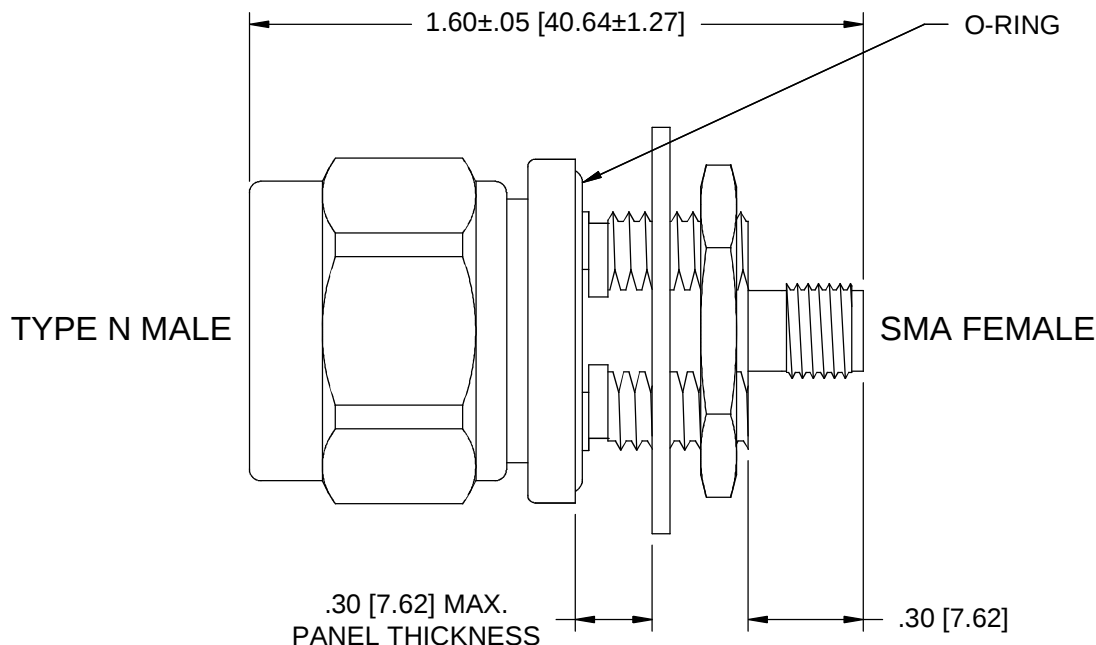

Panel Nut, Lock Washer and O-Ring are Shipped Unassembled.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design specifications are subject to change without notice.

Contact factory for technical specifications before purchasing or use.

5206; REV A

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com