



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 313-3
SLANT SHEET	N/A
RECOMMENDED MATING TORQUE	9 IN-LBS NOM.
COUPLING PROOF TORQUE	15 IN-LBS. MIN.
COUPLING NUT RETENTION	60 IN-LBS. MIN.
FORCE TO ENGAGE	2 LBS. MAX.
FORCE TO DISENGAGE	2 LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION	6 LBS. MIN. (BOTH DIRECTIONS)
CABLE RETENTION	20 LBS. MIN.
MASS	MASS= 19.51 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 12.4 GHz	1.15:1 MAX.
12.4 GHz - 18 GHz	1.20:1 MAX.
INSERTION LOSS	0.04 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1175 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB
CORONA	300 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	775 Vrms MIN.
CONTACT RESISTANCE (INNER)	4.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-62 °C TO 165 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
BODY, CLAMP NUT, & COUPLING NUT	STEEL, CORROSION RESISTANT, ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
CONTACT	BERYLLIUM COPPER, ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
CONTACT RING	BRASS, PER ASTM B16, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
INSULATOR, DIELECTRIC STOP	POLYETHERIMIDE THERMOPLASTIC PER ASTM-D-5205
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
GASKET	SILICONE RUBBER PER ZZ-R-765
APPLICATION	
CABLE(S)	197/205/210 SERIES
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

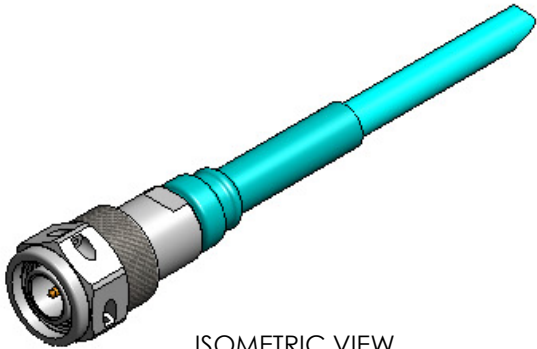

ISOMETRIC VIEW
SCALE 1:1

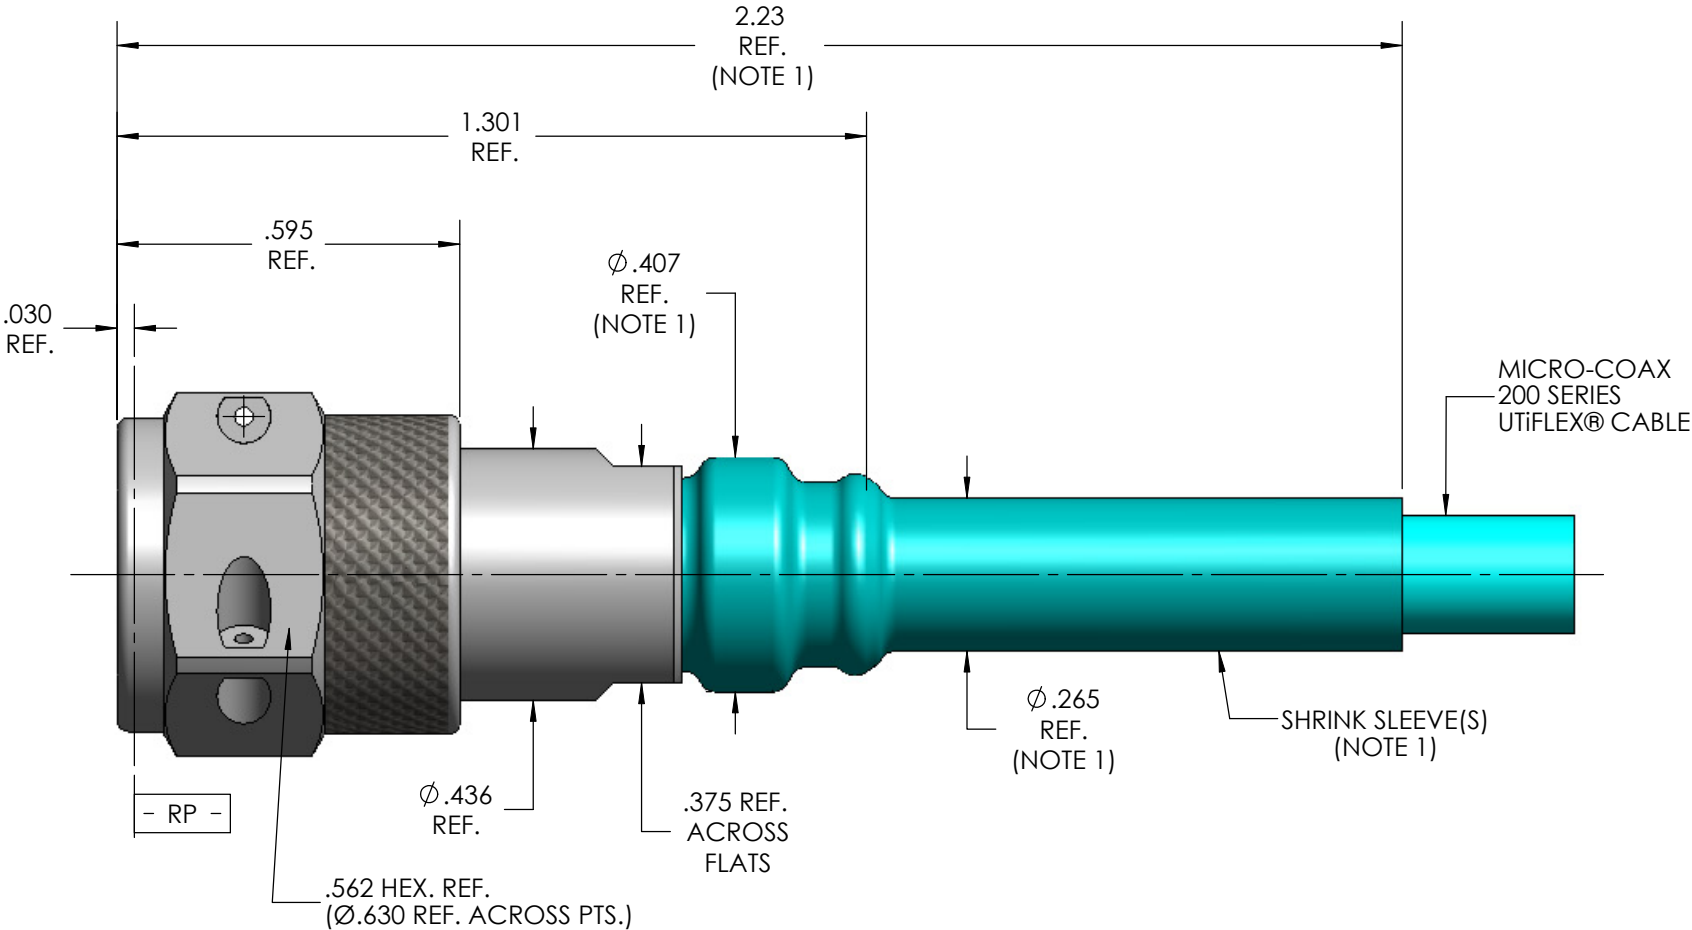

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div>MICRO-COAX[®] <i>Leading the way in transmission line solutions.</i> <i>Copyright Micro-Coax, Inc.</i></div>				
		DWN.	SRS	06/01/05						
		CHKD.	MJM	6/20/12						
		APPVD.								
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE								
		TNCA PLUG, 200 SERIES CABLE, WIRE HOLES								
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.			FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX	± .005				64639	B	3:1	1 OF 1	SD904380	A
.XXXX	± .0010									
ANGLES	± 2°									

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.