

Surface Mount High Isolation Switch

50Ω SPDT, Absorptive DC² to 4500 MHz

SWMA-2-50DR+


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power and Voltage	see note 1
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

RF IN	6
RF OUT 1	1
RF OUT 2	4
TTL IN	2
+5V	5
-5V	7
TTL GND	3
GND	8
GND	PADDLE


Outline Drawing

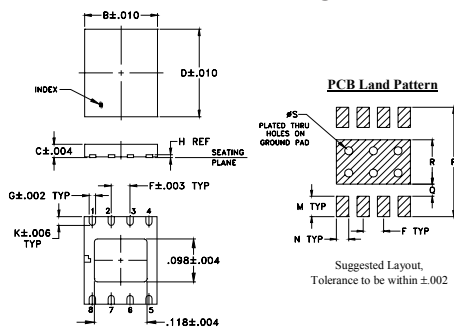

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
-.193	.035	.236	-.050	.017	.008	-.024	-.024	-.024	-.024
4.90	0.90	6.00	1.27	0.43	0.20	-.61	-.61	-.61	-.61
L	M	N	P	Q	R	S	T	wt	
-.050	.030	.270	.030	.110	.020	-.024	-.024	grams	
1.27	0.76	6.86	0.76	2.79	0.51	-.61	-.61	0.08	

Demo Board MCL P/N: TB-161-2+ Suggested PCB Layout (PL-122)

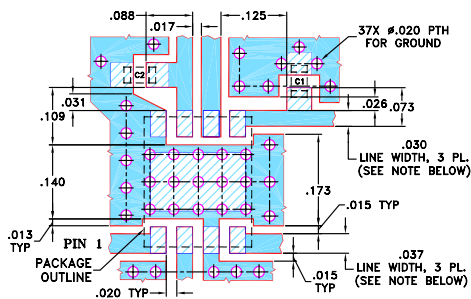

NOTE:


- CAPACITORS C1 & C2: 10 ± 2% pF, 0603 SIZE
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .020" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT
■ DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- high isolation, 65 dB typ. at 1 GHz
- low insertion loss, 0.7 dB typ.
- integral TTL driver
- aqueous washable

Applications

- automated switching networks
- transmitters/receiver isolation



CASE STYLE: DL1020
PRICE: \$6.05 ea. QTY (10)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications (T_{AMB}=25°C)

FREQ. ² (MHz)	INSERTION LOSS (dB)				1dB COMPR. (dBm)				IN-OUT ISOLATION (dB)			
	DC-100 MHz	100-1000 MHz	1000-2000 MHz	2000-4500 MHz	DC-100 MHz	100-1000 MHz	1000-2000 MHz	2000-4500 MHz	DC-100 MHz	100-1000 MHz	1000-2000 MHz	2000-4500 MHz
f _i	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.
DC 4500	0.6	0.9	0.7	1.1	0.9	1.4	1.4	1.9	20 ¹	25	25	24.7

¹drops to 17.0 dBm at 10 MHz

Switching Specifications

Power Supply	Current, mA	
Voltage	9 max.	
+5V ±.20	9 max.	
-5V ±.20	9 max.	
TTL Control	Voltage, V	Current, mA
low threshold	0 min., 0.8 max.	0.2 max.
high threshold	2 min., 5 max.	5 max.
VSWR* (:1)	1.15 typ. to 2GHz, 1.3 typ. to 4.5 GHz	
Rise/Fall Time, ns	5 typ., 15 max.	
Switching Time, ns turn on/off	10 typ., 20 max.	
Video leakage**, mV p-p	30 typ.	


TTL	CONTROL LOGIC	
	RF1	RF2
LOW	ON	OFF
HIGH	OFF	ON

* For all states of absorptive switch

** Video leakage or break through is defined as leakage of TTL switching signal to RF output ports.

- Absolute maximum power and voltage rating:
RF input power, 250mW
Supply voltage: ±6V DC
- All RF connections must be DC blocked or held at 0V DC.
- ESD ratings
Human Body Model (HBM): Class 1C(1000 to <2000V) in accordance with ESD STM5.1-2001 Machine Model(MM): Class M1(<100V) in accordance with ESD STM5.2-1999

Electrical Schematic

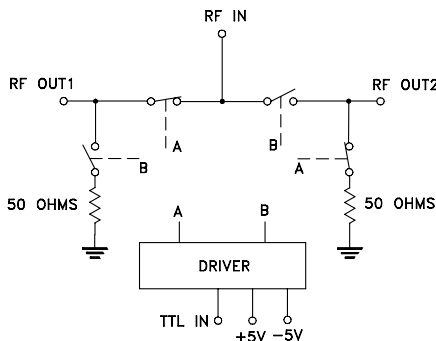

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/VCLStore/terms.jsp






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
M125593
SWMA-2-50DR+
ED-10679
RS/YB/CP
140708

Typical Performance Data

FREQ. (MHz)	ON		INSERTION LOSS (dB)		OFF ISOLATION (dB)		VSWR		
	Control @ 5V		Control @ 0V		Control @ 0V		IN	OUT	OFF
	IN-OUT		IN-OUT		IN-OUT				
	$\overline{x}$	σ	$\overline{x}$	σ	$\overline{x}$	σ			
0.30	0.51	0.01	111.30	6.00	1.11		1.11	1.11	
0.50	0.50	0.00	113.10	3.27	1.12		1.12	1.12	
0.80	0.49	0.00	112.55	4.74	1.12		1.12	1.12	
1.00	0.49	0.00	115.60	6.23	1.12		1.12	1.12	
4.00	0.50	0.01	106.76	3.29	1.12		1.12	1.12	
8.00	0.51	0.01	101.01	1.53	1.11		1.11	1.11	
20.00	0.49	0.01	88.20	1.46	1.11		1.11	1.11	
60.00	0.52	0.01	79.18	0.66	1.10		1.10	1.10	
100.00	0.53	0.01	78.80	0.59	1.10		1.10	1.10	
400.00	0.61	0.01	81.34	0.60	1.13		1.13	1.12	
600.00	0.64	0.01	85.05	4.42	1.14		1.14	1.14	
1000.00	0.70	0.01	68.29	1.98	1.15		1.17	1.19	
1500.00	0.78	0.01	57.36	1.21	1.18		1.22	1.28	
2000.00	0.88	0.01	50.71	0.80	1.28		1.32	1.39	
2500.00	1.05	0.01	43.74	0.52	1.41		1.45	1.51	
3000.00	1.25	0.01	40.47	0.42	1.54		1.53	1.55	
3500.00	1.44	0.01	35.31	0.33	1.55		1.52	1.45	
4000.00	1.74	0.01	31.80	0.15	1.41		1.33	1.22	
4250.00	1.72	0.03	31.76	0.24	1.32		1.22	1.16	
4500.00	1.60	0.02	30.69	0.16	1.19		1.21	1.12	

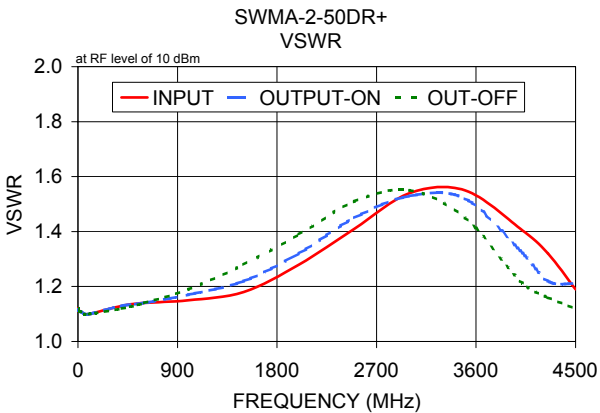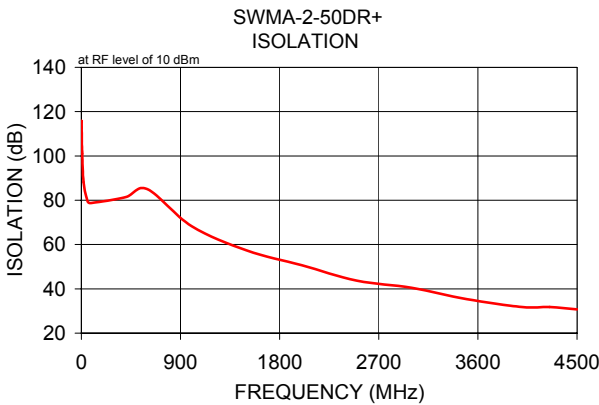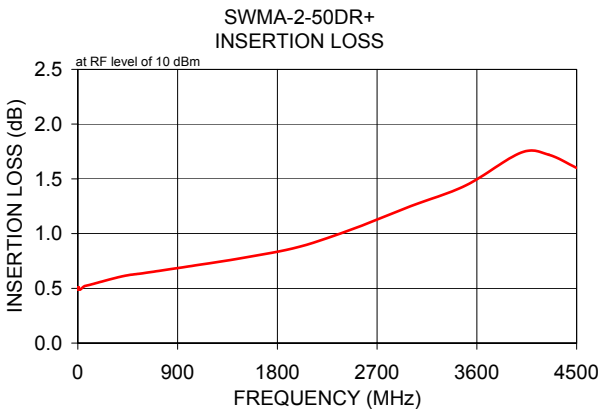

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp