



SSMA Female Connector Solder Attachment 2 Hole Flange For
PE-SR405AL, PE-SR405FL, RG405, .328 inch Hole Spacing

TECHNICAL DATA SHEET

PE44437

Configuration

Connector	SSMA Female
Connector Specification	MIL-C-39012
Connector Interface Type	PE-SR405AL, PE-SR405FL, RG405
Attachment Method (Shield/Contact)	Solder/Solder
Body Style	Straight
Mount Method	2 Hole Flange

Electrical Specifications

Impedance	50 Ohms
-----------	---------

Mechanical Specifications

Temperature

Operating Range	-65 to +165 deg C
-----------------	-------------------

Size

Length	0.495 in [12.57 mm]
Width/Dia.	0.19 in [4.83 mm]
Height	0.469 in [11.91 mm]
Weight	0.004 lbs [1.81 g]

Connector

Type	SSMA Female
Contact Material and Plating	Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Stainless Steel, Gold
Body Plating Specification	MIL-G-45204
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)


RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Female Connector Solder Attachment 2 Hole Flange For PE-SR405AL, PE-SR405FL, RG405, .328 inch Hole Spacing PE44437](#)

PE44437

PE44437 CAD Drawing

SSMA Female Connector Solder Attachment 2 Hole Flange For PE-SR405AL, PE-SR405FL, RG405, .328 inch Hole Spacing

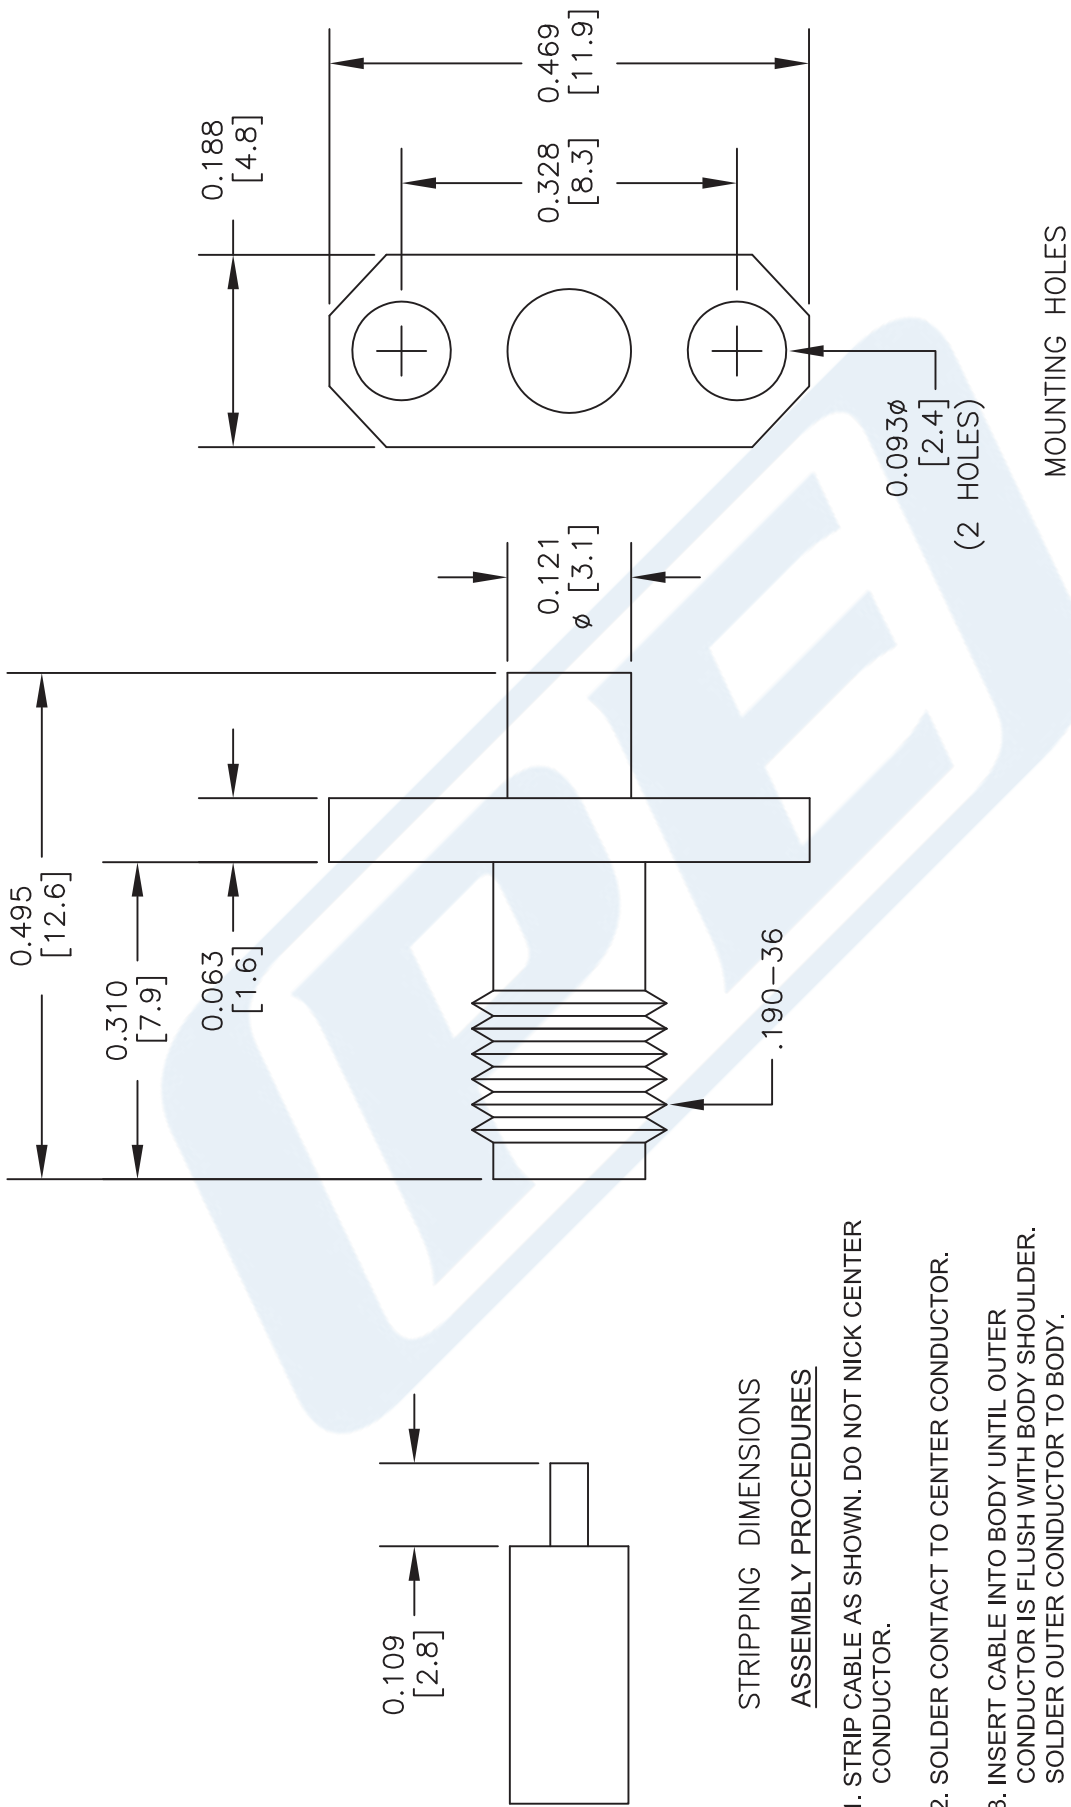

DWG TITLE

PE44437

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 100215

SCALE N/A

SIZE A

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com