



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

851 MHz Ceramic Bandpass Filter

Part Number: AM851B1120



Electrical specifications

Center Frequency: 851 MHz

Bandwidth: $F_0 \pm 19$ MHz

VSWR in BW: 15 min

Input / Output Impedance: 50 Ohms

Passband: 841.5-860.5 MHz

Passband Insertion Loss: 3.2 dB max.

Passband Ripple: 1.0 dB max.

Rejection: 40 dB min. @ 762-800 MHz

Rejection 2: 30 dB min. @ 902-940 MHz

Power Handling: 3 W

Mechanical

Mounting Method: SMT

Dimensions: 30 x 16 x 6 mm


Environmental

Operating Temperature: -20°C to 85°C

Storage Temperature: -50°C to +90°C

This product is RoHS compliant.

Outline Drawing:

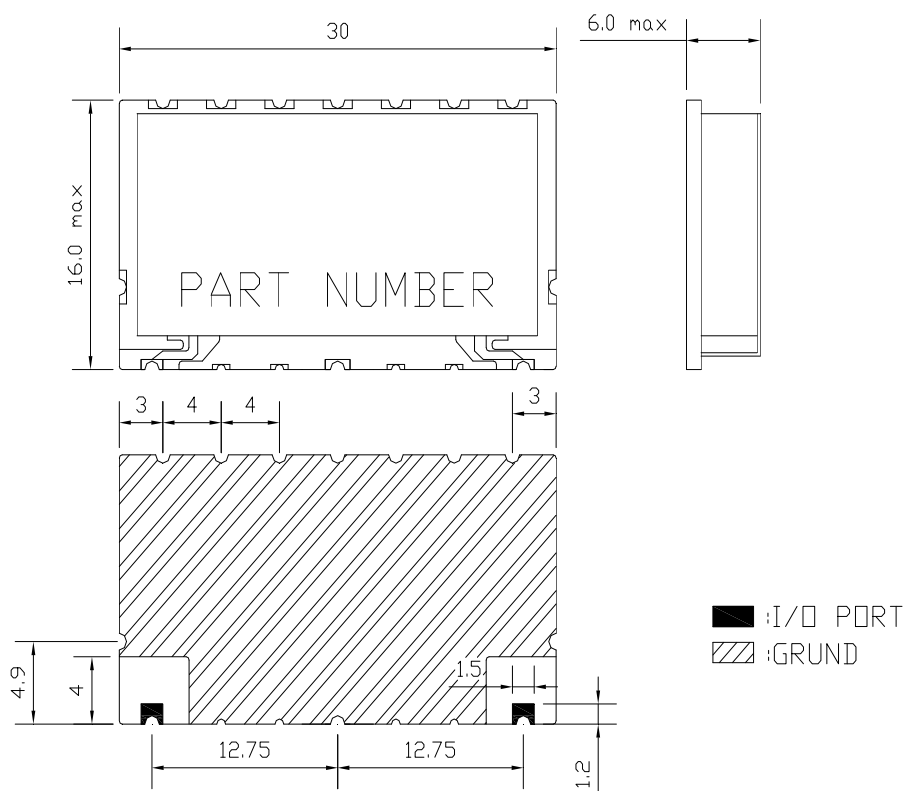



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

851 MHz Ceramic Bandpass Filter

Part Number: AM851B1120



Response Plot:

