


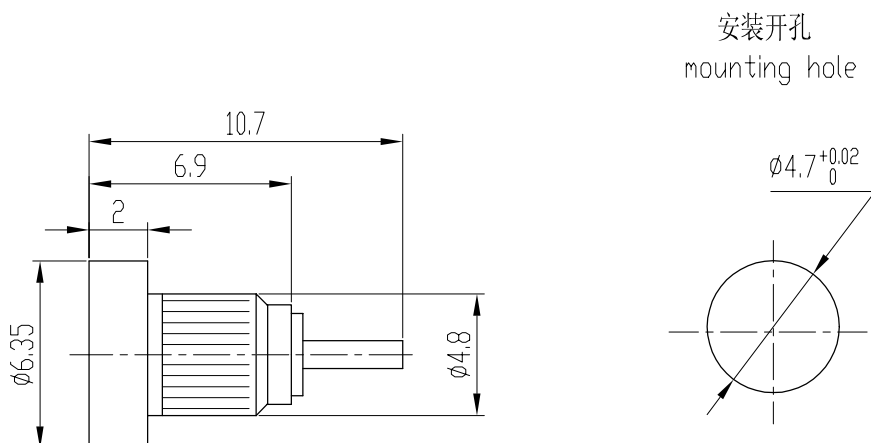

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~3Ghz
3. Contact resistance
Center conductor: $\leq 5.0\ m\Omega$
Out conductor: $\leq 2.5\ m\Omega$
4. Insulation resistance: $\geq 1000M\Omega$
5. Insulator withstanding: 750V
6. Durability: 500cycles

Application: IEC 601169-36

Material&Finishing

1. Center contact :
Female: beryllium copper, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~3Ghz
3. 接触电阻:
中心导体: $\leq 5.0\ m\Omega$
外导体: $\leq 2.5\ m\Omega$
4. 绝缘电阻: $\geq 1000M\Omega$
5. 介质耐压: 750V
6. 插拔次数: 500次

执行标准: IEC 601169-36

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

				SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X ± .15 ±1° .XX ± .05 .XXX ±
				4:1		
				MCX-KPD2		
		NAME		DATE		RF COAXIAL CONNECTOR
DRAWN						西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.
CHECKED						
APPROVED						