




35 W 11 GHz AIN



Standards
NF C 96-315
MIL-DTL-39030



Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier

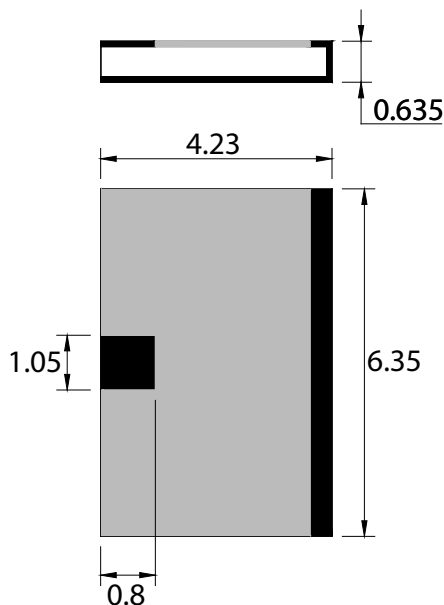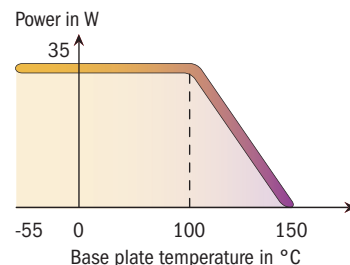

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0079Y	11	35	50	1.30

mm	inch
0.635	0.025
0.8	0.031
1.05	0.041
4.23	0.166
6.35	0.250



Available on Tap and Reel Packaging



12 avenue des Cures Z.I. - 95580 Andilly - FRANCE

Tel. +33 (0)1 34 16 33 00 - Fax +33 (0)1 39 59 85 20 - www.diconex.fr